

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area BLACKJACK CREEK [200007683] WEA88419 - I-01 (S/N 11628066)

Hydraulic System

SHELL TELLUS S2 VX 32 (--- LTR)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX015756		
Sample Date		Client Info		03 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		16		
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	4		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m	/ 10	<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m	20	0		
Cadmium		ASTM D5185m		0		
	ppm	ASTIVI DOTODIII		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		25		
Phosphorus	ppm	ASTM D5185m		291		
Zinc	ppm	ASTM D5185m		325		
Sulfur	ppm	ASTM D5185m		725		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m	- 10	0		
Potassium	ppm	ASTM D5185m	>20	۰ <1		
Water	%	ASTM D3103III		0.004		
ppm Water	ppm	ASTM D6304	>500	46		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	183		
Particles >6µm		ASTM D7647	>2500	49		
Particles >14µm		ASTM D7647	>320	1		
Particles >21µm		ASTM D7647		0		
Particles >38µm		ASTM D7647 ASTM D7647	>20	0		
Particles >71µm		ASTM D7647 ASTM D7647	>20	0		
Oil Cleanliness		ISO 4406 (c)				
		()	>21/18/15	15/13/7		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN) 49:55) Rev: 1	mg KOH/g	ASTM D8045		0.33 Contact/Locatio	n: DEVIN LINE	


Report Id: NORDEX [WUSCAR] 06210784 (Generated: 06/22/2024 03:49:55) Rev: 1

0.33Contact/Location: DEVIN LINEHAN - NORDEX Page 1 of 2



OIL ANALYSIS REPORT

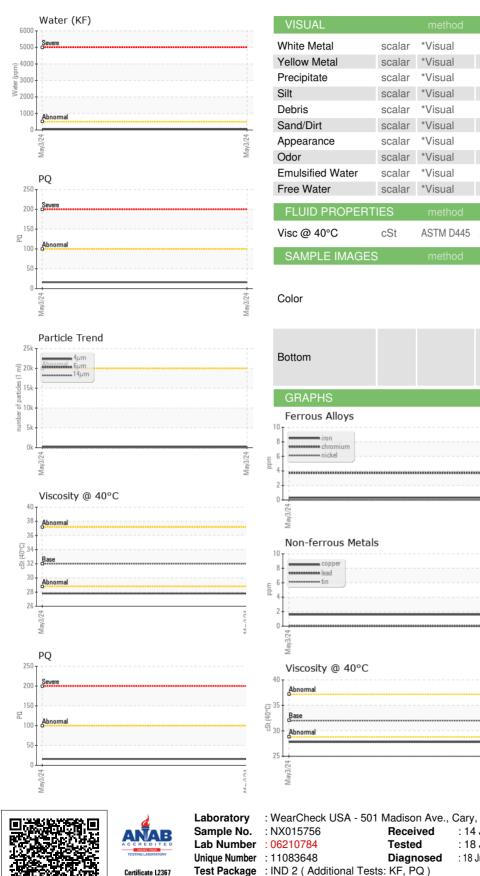

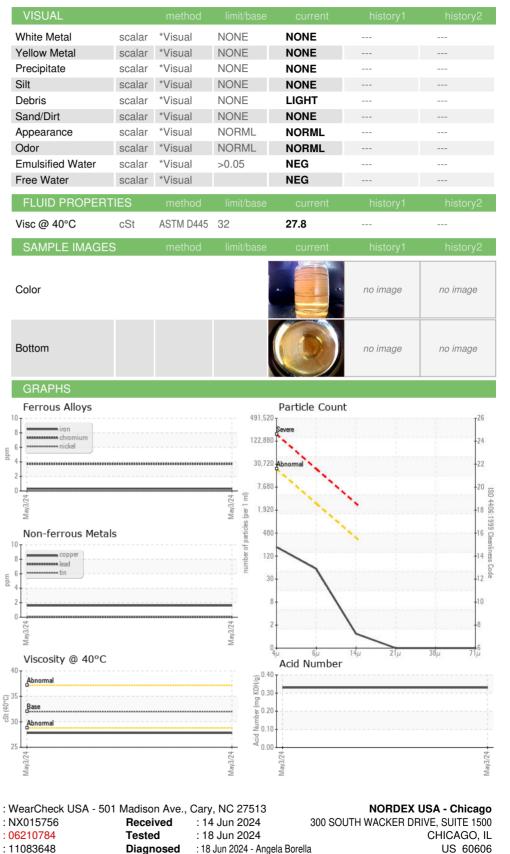

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DEVIN LINEHAN - NORDEX

T: (312)386-4124

F: (312)386-7102

Contact: DEVIN LINEHAN

DLinehan@nordex-online.com