




# OIL ANALYSIS REPORT

Sample Rating Trend

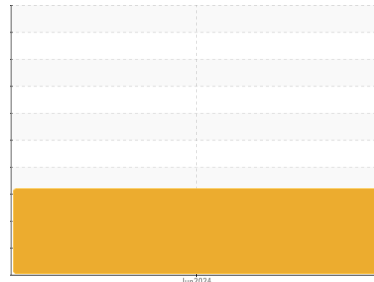

**WATER**



Machine Id  
**9435490 (S/N 1041)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a light concentration of water present in the oil. Excessive free water present. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>KC130687</b>    | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>12 Jun 2024</b> | ---      | ---      |
| Machine Age        | hrs         | Client Info |            | <b>3407</b>        | ---      | ---      |
| Oil Age            | hrs         | Client Info |            | <b>3407</b>        | ---      | ---      |
| Oil Changed        | Client Info |             |            | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | ---      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <b>3</b>     | ---      | ---      |
| Chromium    | ppm | ASTM D5185m | >10        | <b>&lt;1</b> | ---      | ---      |
| Nickel      | ppm | ASTM D5185m | >3         | <b>0</b>     | ---      | ---      |
| Titanium    | ppm | ASTM D5185m | >3         | <b>&lt;1</b> | ---      | ---      |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | ---      | ---      |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>22</b>    | ---      | ---      |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>     | ---      | ---      |
| Copper      | ppm | ASTM D5185m | >50        | <b>&lt;1</b> | ---      | ---      |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>     | ---      | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |






| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Barium     | ppm | ASTM D5185m | 90         | <b>&lt;1</b> | ---      | ---      |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm | ASTM D5185m | 90         | <b>&lt;1</b> | ---      | ---      |
| Calcium    | ppm | ASTM D5185m | 2          | <b>0</b>     | ---      | ---      |
| Phosphorus | ppm | ASTM D5185m |            | <b>57</b>    | ---      | ---      |
| Zinc       | ppm | ASTM D5185m |            | <b>3</b>     | ---      | ---      |

| CONTAMINANTS |     | method      | limit/base | current        | history1 | history2 |
|--------------|-----|-------------|------------|----------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>&lt;1</b>   | ---      | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>&lt;1</b>   | ---      | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>7</b>       | ---      | ---      |
| Water        | %   | ASTM D6304  | >0.05      | <b>▲ 0.074</b> | ---      | ---      |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>▲ 740</b>   | ---      | ---      |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>600</b>      | ---      | ---      |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>327</b>      | ---      | ---      |
| Particles >14µm   |  | ASTM D7647   | >80        | <b>56</b>       | ---      | ---      |
| Particles >21µm   |  | ASTM D7647   | >20        | <b>19</b>       | ---      | ---      |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>3</b>        | ---      | ---      |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>        | ---      | ---      |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | <b>16/16/13</b> | ---      | ---      |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 0.4        | <b>0.32</b> | ---      | ---      |


# OIL ANALYSIS REPORT

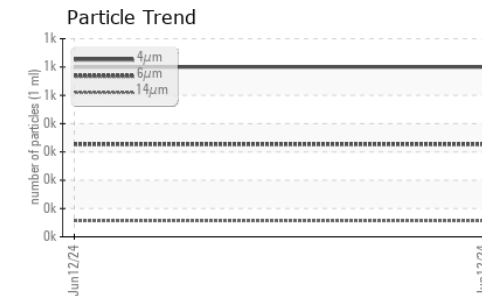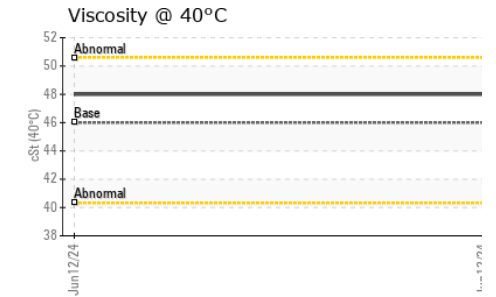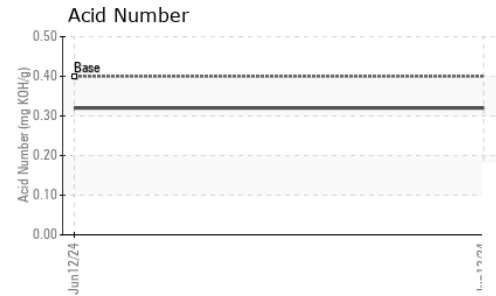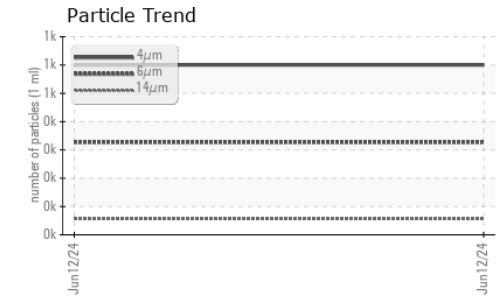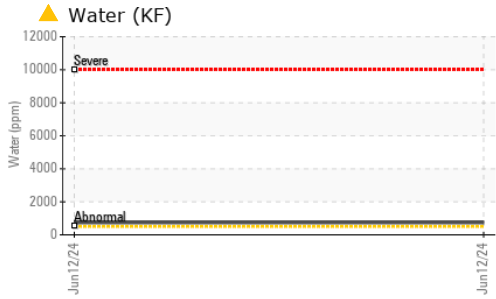






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | LIGHT    | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.05   | 0.2%     | ---      |
| Free Water       | scalar | *Visual    |         | ▲ 10.0   | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 46      | 48.0     | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

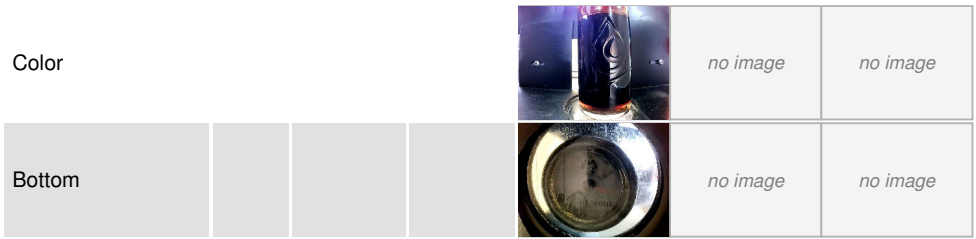

## GRAPHS

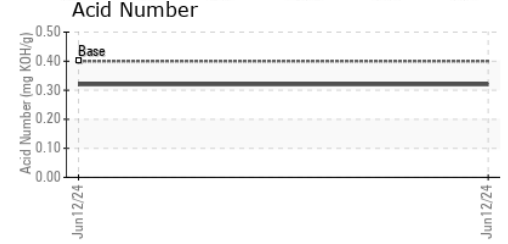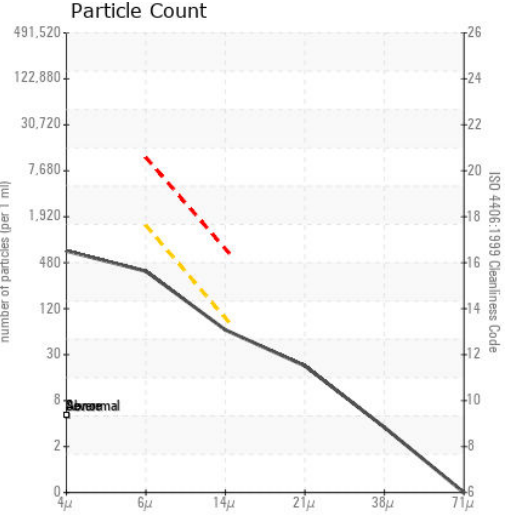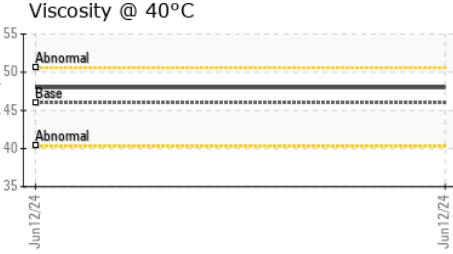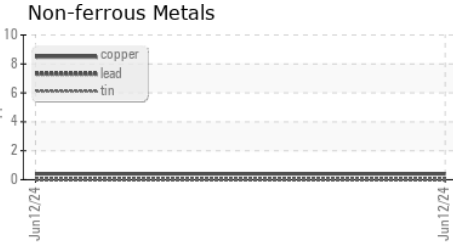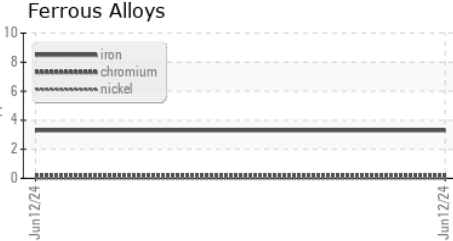

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC130687  
**Lab Number** : 06210792  
**Unique Number** : 11083656  
**Test Package** : IND 2  
**Received** : 14 Jun 2024  
**Tested** : 18 Jun 2024  
**Diagnosed** : 18 Jun 2024 - Angela Borella

**TRELLEBORG SALISBURY INC**  
 510 LONG MEADOW DR  
 SALISBURY, NC  
 US 28147  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)