

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Area **[73450027] 7006617 (S/N 2093)** Component Compressor

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

KAESER SIGMA (OEM) M-460 (--- GAL)

#### Wear

Fluid

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM    | IATION   | method       | limit/base | current           | history1 | history2 |
|------------------|----------|--------------|------------|-------------------|----------|----------|
| Sample Number    |          | Client Info  |            | KCPA018414        |          |          |
| Sample Date      |          | Client Info  |            | 11 Jun 2024       |          |          |
| Machine Age      | hrs      | Client Info  |            | 1395              |          |          |
| Oil Age          | hrs      | Client Info  |            | 0                 |          |          |
| Oil Changed      |          | Client Info  |            | Changed           |          |          |
| Sample Status    |          |              |            | ABNORMAL          |          |          |
| WEAR METALS      |          | method       | limit/base | current           | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >50        | <1                |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | <1                |          |          |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0                 |          |          |
| Titanium         | ppm      | ASTM D5185m  | >3         | <1                |          |          |
| Silver           | ppm      | ASTM D5185m  | >2         | 0                 |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 2                 |          |          |
| Lead             | ppm      | ASTM D5185m  | >10        | 0                 |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | 2                 |          |          |
| Tin              | ppm      |              | >10        | 0                 |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0                 |          |          |
| ADDITIVES        |          | method       | limit/base | current           | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Barium           | ppm      | ASTM D5185m  | 90         | 4                 |          |          |
| Molybdenum       | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Magnesium        | ppm      | ASTM D5185m  | 100        | 57                |          |          |
| Calcium          | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Phosphorus       | ppm      | ASTM D5185m  | 0          | 14                |          |          |
| Zinc             | ppm      | ASTM D5185m  | 0          | 12                |          |          |
| Sulfur           | ppm      | ASTM D5185m  | 23500      | 21744             |          |          |
| CONTAMINANTS     |          | method       | limit/base | current           | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >25        | 2                 |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 6                 |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 1                 |          |          |
| Water            | %        | ASTM D6304   | >0.05      | 0.020             |          |          |
| ppm Water        | ppm      | ASTM D6304   | >500       | 206               |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current           | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 25669             |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | <u> </u>          |          |          |
| Particles >14µm  |          | ASTM D7647   | >80        | <u> </u>          |          |          |
| Particles >21µm  |          | ASTM D7647   | >20        | 18                |          |          |
| Particles >38µm  |          | ASTM D7647   | >4         | 1                 |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0                 |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | <b>A</b> 22/21/15 |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current           | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 1.0        | 0.37              |          |          |
|                  |          |              |            |                   |          |          |

Contact/Location: GABRIEL COLINDRES - PARMORKCP Page 1 of 2

# KAESER COMPRESSORS Built for a lifetime."





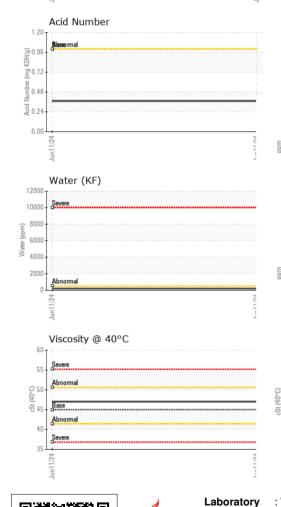

# **OIL ANALYSIS REPORT**

| VISUAL  |                                       | method                         | limit/base   | current                | history1     | history2                                 |
|---|---------------------------------------|--------------------------------|--|------------------------|--------------|--|
| White Metal   | scalar                                | *Visual                        | NONE   | NONE                   |              |  |
| Yellow Metal  | scalar                                | *Visual                        | NONE   | NONE                   |              |  |
| Precipitate   | scalar                                | *Visual                        | NONE   | NONE                   |              |  |
| Silt  | scalar                                | *Visual                        | NONE   | NONE                   |              |  |
| Debris  | scalar                                | *Visual                        | NONE   | LIGHT                  |              |  |
| Sand/Dirt   | scalar                                | *Visual                        | NONE   | NONE                   |              |  |
| Appearance  | scalar                                | *Visual                        | NORML  | NORML                  |              |  |
| Ddor  | scalar                                | *Visual                        | NORML  | NORML                  |              |  |
| Emulsified Water  | scalar                                | *Visual                        | >0.05  | NEG                    |              |  |
| Free Water  | scalar                                | *Visual                        |  | NEG                    |              |  |
| FLUID PROPERTI  | ES                                    | method                         | limit/base   | current                | history1     | history2                                 |
| /isc @ 40°C   | cSt                                   | ASTM D445                      | 45   | 47.0                   |              |  |
| SAMPLE IMAGES   |                                       | method                         | limit/base   | current                | history1     | history2                                 |
|   |                                       |                                |  |                        | ,            | <b>,</b>                                 |
|   |                                       |                                |  |                        |              |  |
| Color   |                                       |                                |  |                        | no image     | no image                                 |
|   |                                       |                                |  |                        |              |  |
|   |                                       |                                |  |                        |              |  |
| Bottom  |                                       |                                |  |                        | no image     | no image                                 |
|   |                                       |                                |  |                        | 0            | 0  |
| GRAPHS  |                                       |                                |  |                        |              |  |
|   |                                       |                                |  | Particle Coun          | <del>F</del> |  |
| Ferrous Alloys  |                                       |                                | 491,52   |                        | L            | T <sup>26</sup>                          |
| iron  |                                       |                                | 122,88   | 0                      |              | 24                                       |
| nickel  |                                       |                                | 122,00   | -                      |              | -24                                      |
|   |                                       |                                | 30,72  | 0                      |              | -22                                      |
|   |                                       |                                | 7,68   |                        |              | -20                                      |
| 24  |                                       |                                |  |                        |              | 720                                      |
| Jun 11/24   |                                       |                                | 481<br>1721  | •- \ \                 |              | -18                                      |
| Non-ferrous Metals  |                                       |                                | ິ<br>:12 48  | 0                      |              | 16                                       |
|   |                                       |                                | of par   | Č N                    | $\mathbf{X}$ | 10                                       |
| copper  |                                       |                                |  | 0-                     | 1            | -14                                      |
| tin   |                                       |                                | 2 3  | 0-                     |              | -12                                      |
|   |                                       |                                |  |                        |              |  |
|   |                                       |                                |  | <sup>8</sup> Beresemal |              | -10                                      |
| 24  |                                       |                                | 24   | 2 -                    |              | -8                                       |
| Jun11/24  |                                       |                                | Jun 11/24  |                        |              |  |
| ¬<br>Viscosity @ 40°C                                       |                                       |                                | 7  | 0<br>4μ 6μ             | 14µ 21µ      | 38µ 71µ                                  |
|   |                                       |                                | -1.2   | Acid Number            |              |  |
| Severe  |                                       |                                | (B/HO 9  | Basermal               |              |  |
| Abnormal  |                                       |                                | ¥ 0.3  | 2-                     |              |  |
| Base  |                                       |                                | 40.1<br>40.1<br>40.1<br>40.1<br>40.1<br>40.1<br>40.1<br>40.1 | 8                      |              |  |
| Abnormal  |                                       |                                | N p 0.2  | 4                      |              |  |
|   |                                       |                                | 0.0  | 0                      |              |  |
| 11/24   |                                       |                                | Jun11/24   | Jun 11/24              |              | Jun 11/24                                |
| Jun 11,   |                                       |                                | Jun  | Jun                    |              | unf                                      |
|   | Recei<br>Teste<br>Diagn               | ved : 14   d : 18   iosed : 18 | , NC 27513<br>Jun 2024<br>Jun 2024<br>Jun 2024 - Ang         | ela Borella            |              | SUTTER BLVD<br>IGAN HILL, CA<br>US 95037 |
| 1083660<br>ND 2 ( Additional Test<br>Intact Customer Servic | <b>Diagn</b><br>s: KF, P<br>ce at 1-8 | nosed : 18<br>rtCount)         | Jun 2024 - Ang<br>9.   |                        |              | US 950<br>L COLINDR                      |

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PARMORKCP [WUSCAR] 06210796 (Generated: 06/19/2024 08:53:32) Rev: 1

Certificate L2367

Sample No.

Lab Number Unique Number Test Package :

Contact/Location: GABRIEL COLINDRES - PARMORKCP

Т:

F: