




# OIL ANALYSIS REPORT

## Sample Rating Trend

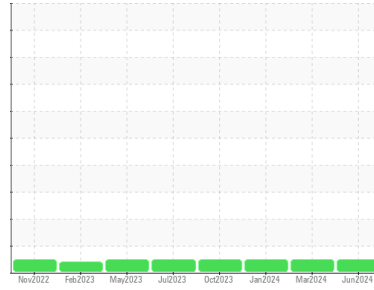

**NORMAL**



Machine Id

**1645**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0858205</b>	WC0858128	WC0858180
Sample Date	Client Info			<b>06 Jun 2024</b>	07 Mar 2024	02 Jan 2024
Machine Age	hrs	Client Info		<b>11368</b>	10840	10372
Oil Age	hrs	Client Info		<b>520</b>	520	520
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>8</b>	4	10
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	3	2
Lead	ppm	ASTM D5185m	>45	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>7</b>	10	10
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>63</b>	56	64
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>954</b>	945	956
Calcium	ppm	ASTM D5185m	3000	<b>1190</b>	1130	1121
Phosphorus	ppm	ASTM D5185m	1150	<b>1067</b>	1024	1013
Zinc	ppm	ASTM D5185m	1350	<b>1278</b>	1274	1240
Sulfur	ppm	ASTM D5185m	4250	<b>3710</b>	4044	3379

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	8	4
Sodium	ppm	ASTM D5185m	>158	<b>1</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	5


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	5.0	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.1</b>	17.3	19.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	12.8	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.2</b>	9.3	8.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

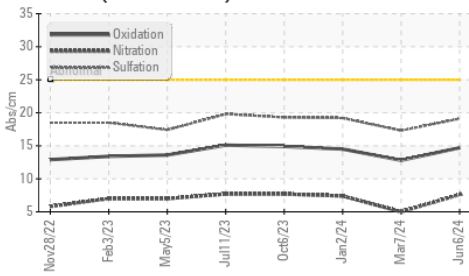

Base Number

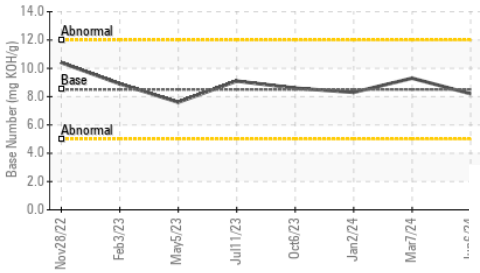





Viscosity @ 100°C

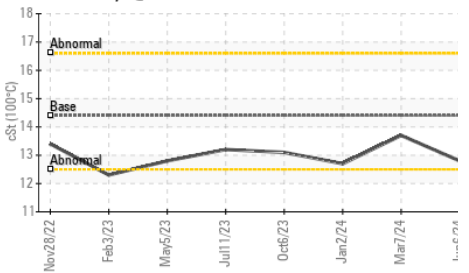

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.7

## GRAPHS

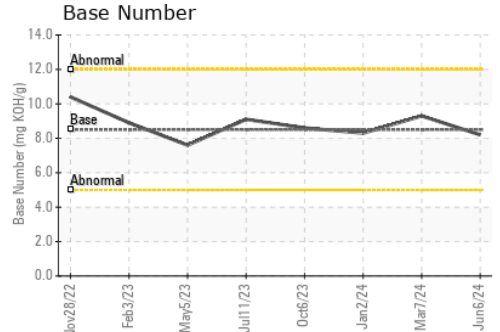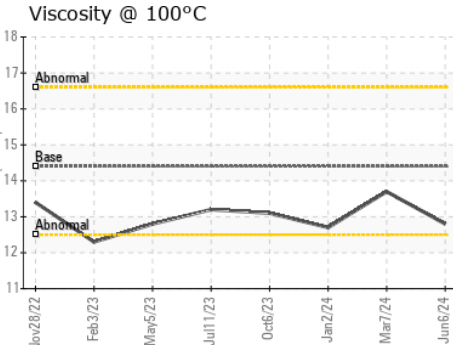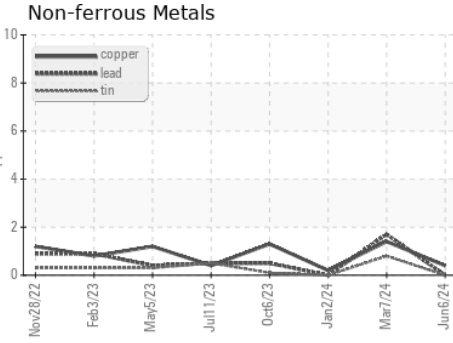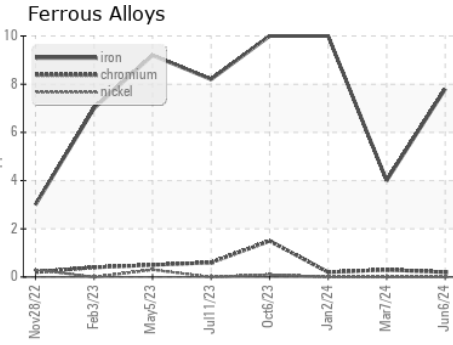

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0858205

Lab Number : 06211060

Unique Number : 11083924

Test Package : CONST ( Additional Tests: TBN )

Received : 14 Jun 2024

Tested : 18 Jun 2024

Diagnosed : 18 Jun 2024 - Wes Davis

Apple Valley Waste - Hometown Location

155 Airport Road

Selinsgrove, PA

US 17870

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: