




# OIL ANALYSIS REPORT

Sample Rating Trend

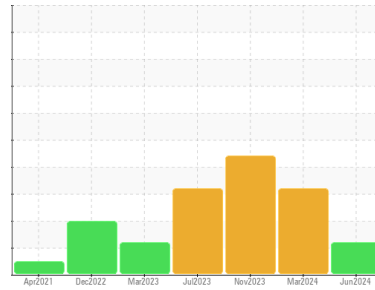

FUEL



Area  
**SCHTRUCK**  
 Machine Id  
**6249 [SCHTRUCK]**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0007242</b>	SBP0007062	SBP0005601
Sample Date	Client Info		<b>05 Jun 2024</b>	12 Mar 2024	01 Nov 2023
Machine Age	mls	Client Info	<b>700588</b>	681075	653722
Oil Age	mls	Client Info	<b>19513</b>	27353	24027
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>80	<b>28</b>	44	63
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>30	<b>4</b>	7	10
Copper	ppm	ASTM D5185m	>150	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>2</b>	4	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	5
Molybdenum	ppm	ASTM D5185m	60	<b>57</b>	59	51
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>927</b>	920	752
Calcium	ppm	ASTM D5185m	1070	<b>1087</b>	1119	1023
Phosphorus	ppm	ASTM D5185m	1150	<b>964</b>	958	813
Zinc	ppm	ASTM D5185m	1270	<b>1164</b>	1177	1011
Sulfur	ppm	ASTM D5185m	2060	<b>3216</b>	3014	2564

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m		<b>8</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Fuel	%	ASTM D3524	>5	<b>▲ 6.8</b>	▲ 7.0	▲ 8.8

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>2.9</b>	▲ 3.1	▲ 4.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	11.5	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>26.7</b>	30.5	34.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.8</b>	29.2	34.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.1</b>	▲ 3.6	▲ 1.1




# OIL ANALYSIS REPORT


## Fuel Dilution

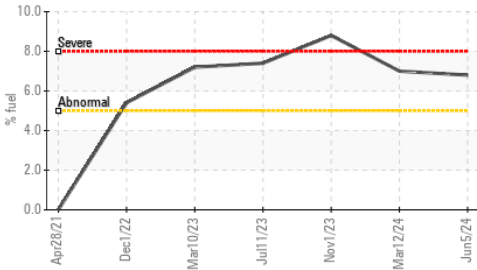


## FT-IR (Direct Trend)

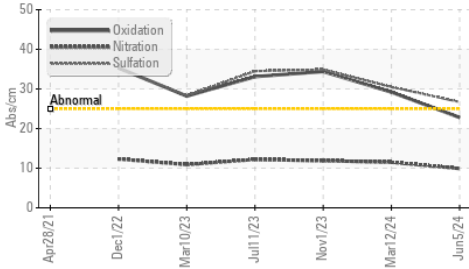

## FT-IR (Direct Trend)

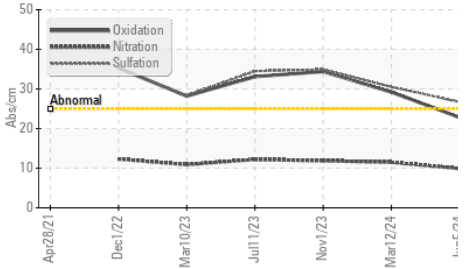

## Base Number

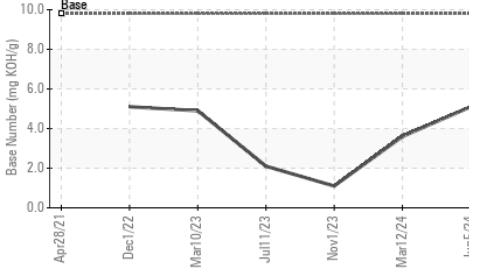


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.4	▲ 12.1

## GRAPHS


### Ferrous Alloys

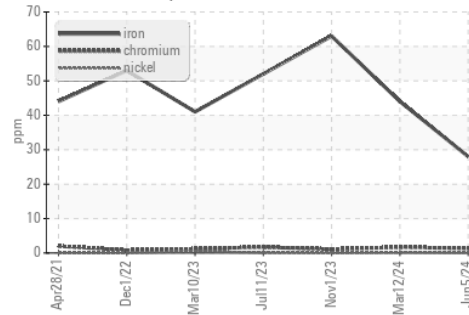


### Non-ferrous Metals

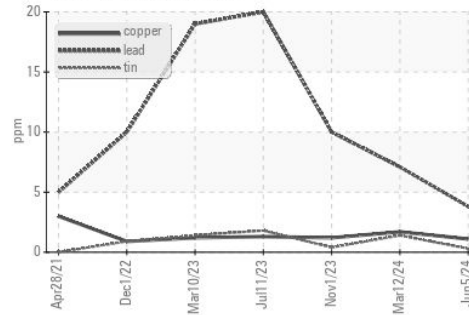

### Viscosity @ 100°C

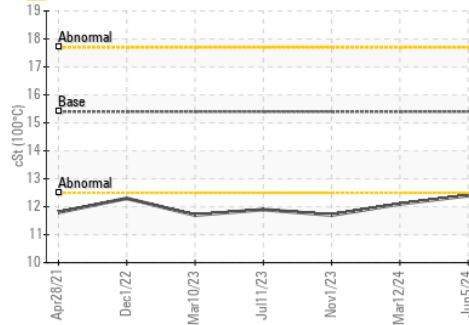

### Base Number

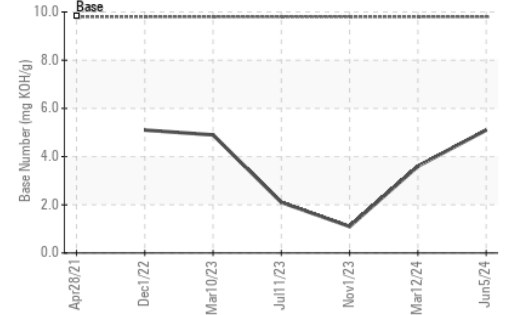

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : SBP0007242

Lab Number : 06211153

Unique Number : 11084017

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 14 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Wes Davis

SCHMIDT TRANSPORTATION - 605449

108 E Bay Road

Plattsmouth, NE

US 68048

Contact: NICK DOTY

doty@liquidtrucking.com

T: (402)949-9398

F: