




OIL ANALYSIS REPORT

Sample Rating Trend

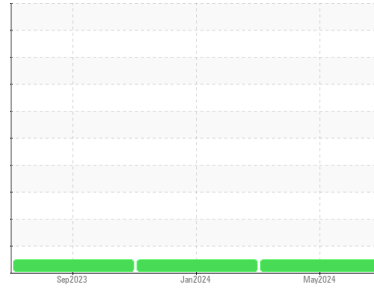

NORMAL



Machine Id

22403

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0901362	WC0832065	WC0832049
Sample Date	Client Info			06 May 2024	16 Jan 2024	25 Sep 2023
Machine Age	mls	Client Info		143471	94139	47975
Oil Age	mls	Client Info		50000	50000	47975
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	0.2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	33	42	75
Chromium	ppm	ASTM D5185m	>20	2	4	6
Nickel	ppm	ASTM D5185m	>4	<1	0	2
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	23	44	104
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	48	112	160
Tin	ppm	ASTM D5185m	>15	<1	1	7
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	8	6	27
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	61	63	43
Manganese	ppm	ASTM D5185m		1	1	3
Magnesium	ppm	ASTM D5185m	450	878	796	562
Calcium	ppm	ASTM D5185m	3000	1392	1352	1789
Phosphorus	ppm	ASTM D5185m	1150	1029	876	735
Zinc	ppm	ASTM D5185m	1350	1236	1083	950
Sulfur	ppm	ASTM D5185m	4250	3180	2254	1968

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	9	13
Sodium	ppm	ASTM D5185m		4	4	8
Potassium	ppm	ASTM D5185m	>20	51	98	253


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	9.5	9.3	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.9	23.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	19.1	25.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.6	7.0	7.1




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

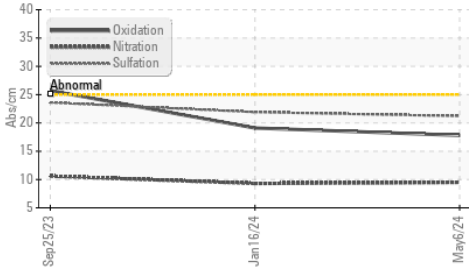


Aluminum (ppm)

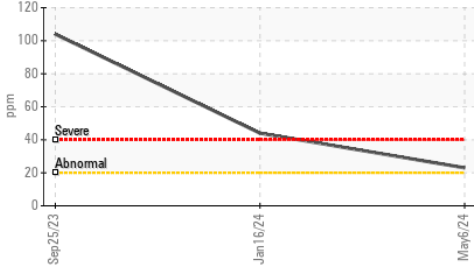

Viscosity @ 100°C

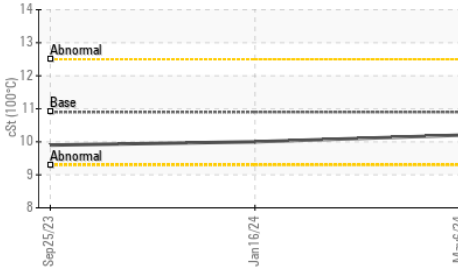

Aluminum (ppm)

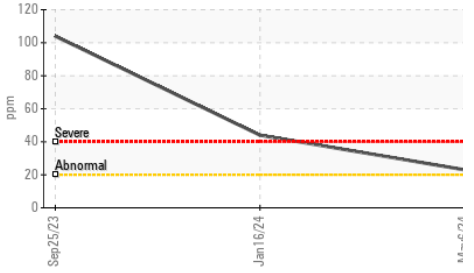


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	10.2	10.0

GRAPHS


Ferrous Alloys

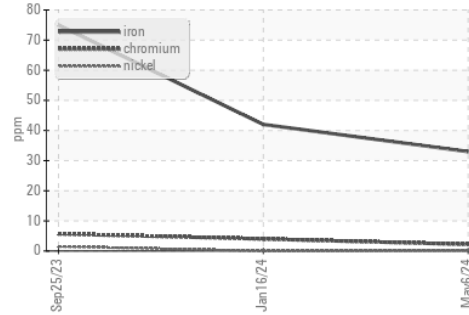


Non-ferrous Metals

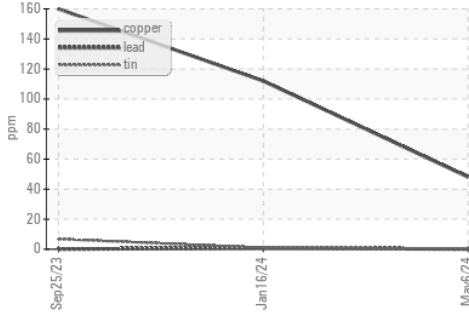

Viscosity @ 100°C

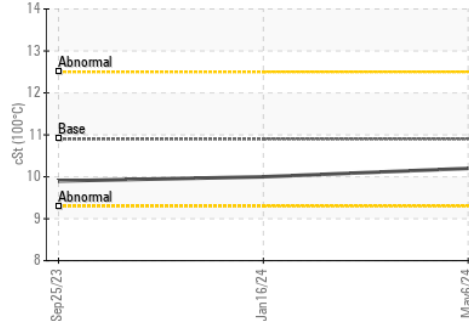

Base Number

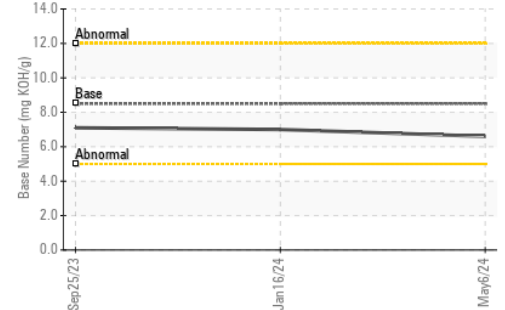

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0901362
 Lab Number : 06211383
 Unique Number : 11084247
 Test Package : FLEET

Received : 17 Jun 2024
 Tested : 19 Jun 2024
 Diagnosed : 19 Jun 2024 - Wes Davis

MID-ATLANTIC TRANSPORT
 38 IRONSIDE CT
 WILLINGBORO, NJ
 US 08046

Contact: GARY LAWYER
 gary@midatlantictrans.com
 T: (609)864-6948

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: