

OIL ANALYSIS REPORT

Sample Rating Trend







WEST BELT

Component
Hydraulic System

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|--|---|--|---|---|----------------------------------|-------------------|
| Sample Number | | Client Info | | PH0001760 | | |
| Sample Date | | Client Info | | 16 Jun 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.05 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 1 | | |
| Chromium | ppm | ASTM D5185m | >20 | <1 | | |
| Nickel | ppm | ASTM D5185m | >20 | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | | |
| Lead | ppm | ASTM D5185m | >20 | <1 | | |
| Copper | ppm | ASTM D5185m | >20 | 6 | | |
| Tin | ppm | ASTM D5185m | >20 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| | | | | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | ppm | method ASTM D5185m | limit/base | current 6 | history1 | history2 |
| | ppm | | limit/base | | | history2 |
| Boron | | ASTM D5185m | limit/base | 6 | | |
| Boron Barium | ppm | ASTM D5185m ASTM D5185m | limit/base | 6 0 | | |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 | | |
| Boron Barium Molybdenum Manganese | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 <1 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 <1 20 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 <1 20 107 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 <1 20 107 332 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 6 0 5 <1 20 107 332 443 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | | 6 0 5 <1 20 107 332 443 1018 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base | 6 0 5 <1 20 107 332 443 1018 | history1 | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base | 6 0 5 <1 20 107 332 443 1018 current | history1 | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >15 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >15 >20 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 | history1 | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >15 >20 limit/base | 6 0 5 <1 20 107 332 443 1018 current 2 <1 1 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | limit/base >15 >20 limit/base >10000 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 1 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | limit/base >15 >20 limit/base >10000 >2500 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 1 current 9033 1982 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 | limit/base >15 >20 limit/base >10000 >2500 >320 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 1 current 9033 1982 90 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m MEthod ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >15 >20 limit/base >10000 >2500 >320 >80 | 6 0 5 <1 20 107 332 443 1018 current 2 <1 1 current 9033 1982 90 23 | history1 history1 | history2 history2 |

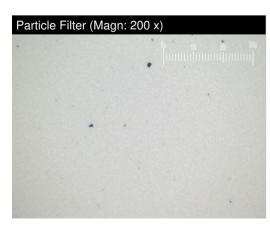


FLUID DEGRADATION method limit/base current history1 h

Acid Number (AN) mg KOH/g ASTM D8045 0.51 --- ---



OIL ANALYSIS REPORT

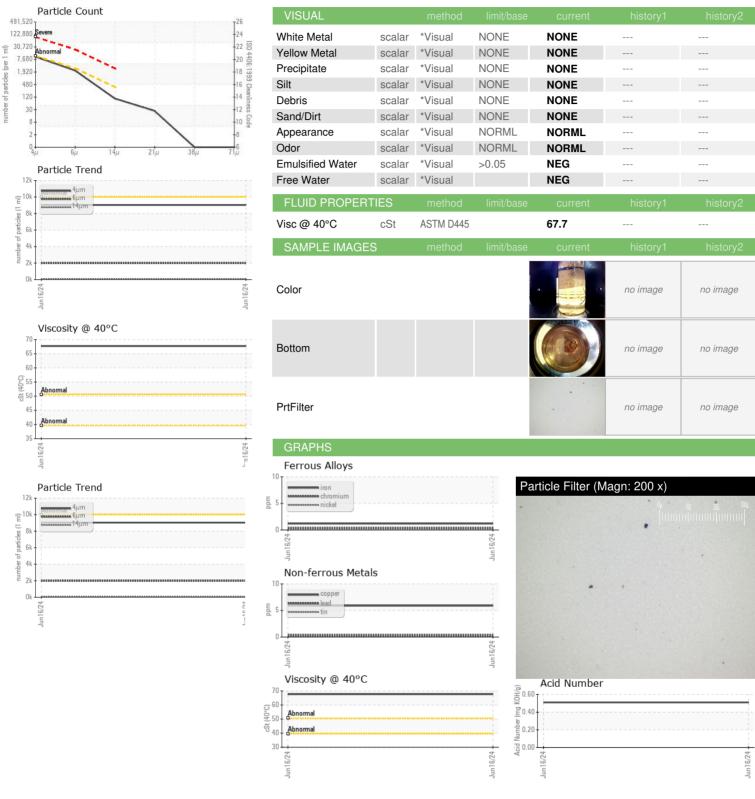





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: PH0001760 Lab Number : 06211597 Unique Number : 11084461

Diagnosed Test Package: PLANT (Additional Tests: PrtFilter)

Received

Tested

: 17 Jun 2024

: 19 Jun 2024

: 19 Jun 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

jay.gronbach@parker.com

Report Id: PARMET [WUSCAR] 06211597 (Generated: 06/22/2024 03:10:51) Rev: 1

Contact/Location: JAY GRONBACH - PARMET

PARKER HANNIFIN CORPORATION-OIL LAB

501 MADISON AVENUE

Contact: JAY GRONBACH

CARY, NC

US 27513

T:

F: