

OIL ANALYSIS REPORT


SAMPLE INFORMATION method

Sample Number

Sample Rating Trend

limit/base

Client Info

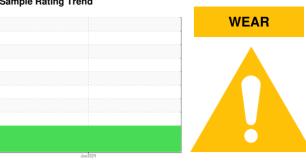

history1

current

PH0001530

Machine Id

C1 EAST

Component Hydraulic System

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. All other component wear rates are normal.


Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sample Number		Client Into		PH0001530		
Sample Date		Client Info		16 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	<u> </u>		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		14		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		9		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		51		
Calcium	ppm	ASTM D5185m		154		
Phosphorus	ppm	ASTM D5185m		404		
Zinc	ppm	ASTM D5185m		503		
Sulfur	ppm	ASTM D5185m		1254		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	4		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	19440		
Particles >6µm		ASTM D7647	>2500	4493		
Particles >14μm		ASTM D7647	>320	247		
Particles >21µm		ASTM D7647	>80	57		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>21/19/15</u>		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
	1/0:::					

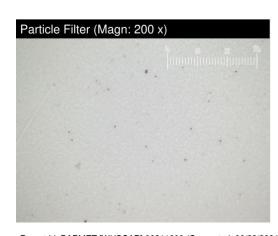


Acid Number (AN) mg KOH/g ASTM D8045

Contact/Location: JAY GRONBACH - PARMET



OIL ANALYSIS REPORT

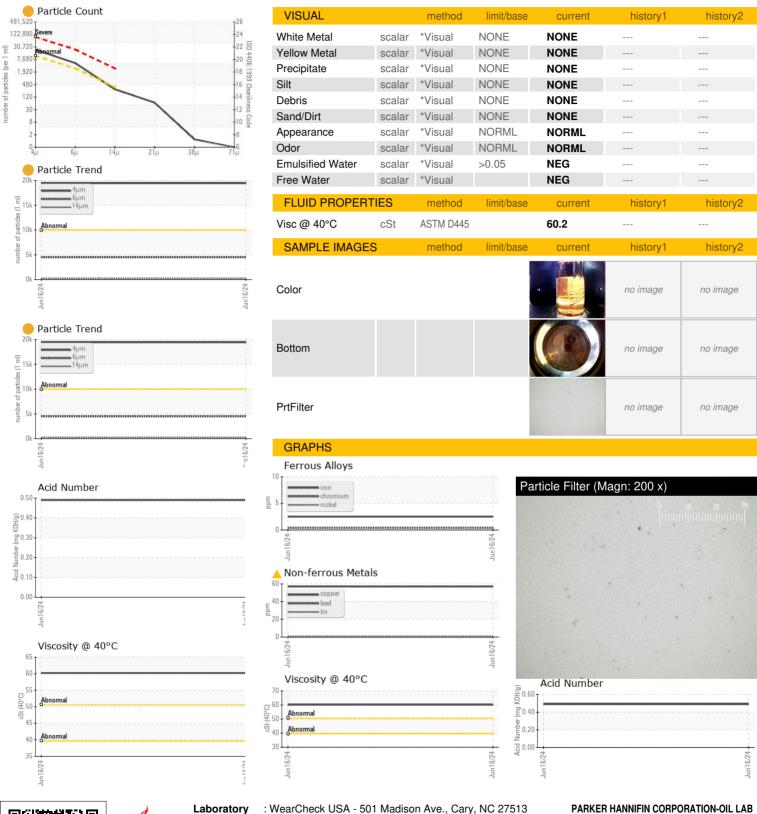



Certificate 12367

Laboratory Sample No.

: PH0001530 Lab Number : 06211600

Received **Tested** Unique Number : 11084464

: 17 Jun 2024 : 19 Jun 2024 Diagnosed

: 19 Jun 2024 - Angela Borella

Test Package: PLANT (Additional Tests: PrtFilter)

US 27513 Contact: JAY GRONBACH jay.gronbach@parker.com

501 MADISON AVENUE

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CARY, NC

T:

F: