

Area


**PALUBE 32 FG**

Machine Id

**SULLIVAN PALATEK 1806050005 - TAYLOR FARMS HANSEN**

Component

**Compressor**

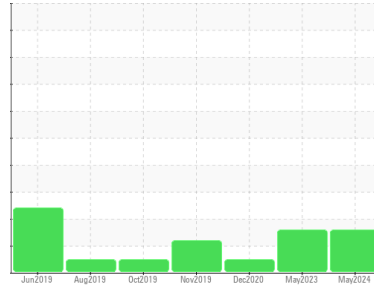

**DIAGNOSIS**

**Recommendation**

We advise that you check for a possible overheat condition. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The oil viscosity is higher than normal. The AN level is above the recommended limit. TAN level indicates possible presence of varnish. The oil is no longer serviceable.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>UCS06211817</b>	UCS05859386	UCS05194232
Sample Date	Client Info		<b>12 May 2024</b>	21 May 2023	20 Dec 2020
Machine Age	hrs	Client Info	<b>43486</b>	35098	14797
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>ATTENTION</b>	ATTENTION	NORMAL

**CONTAMINATION**

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>2</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >50	<b>20</b>	13	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 730	<b>1</b>	8	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m 0.0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m 0	<b>1</b>	0	0
Phosphorus	ppm	ASTM D5185m 0	<b>237</b>	234	359
Zinc	ppm	ASTM D5185m 0	<b>11</b>	0	0
Sulfur	ppm	ASTM D5185m 590	<b>439</b>	497	313



**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m	<b>5</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	<1

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.14	<b>5.82</b>	2.98	1.228


# OIL ANALYSIS REPORT

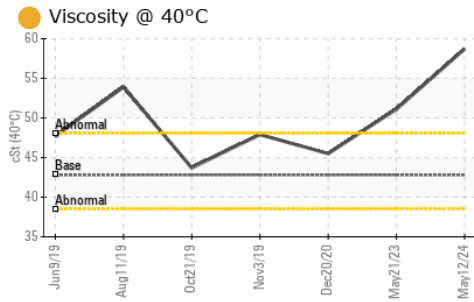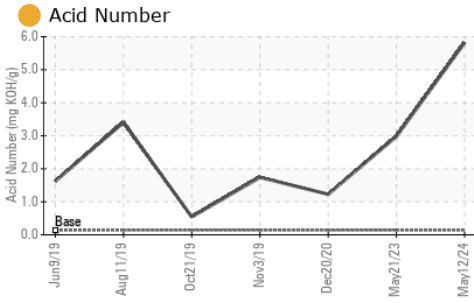





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	42.8	58.7	51.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

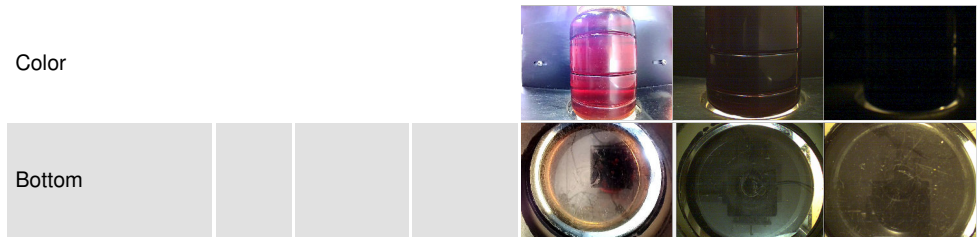

## GRAPHS

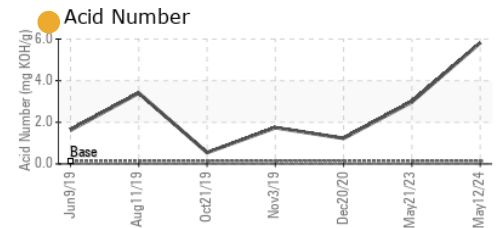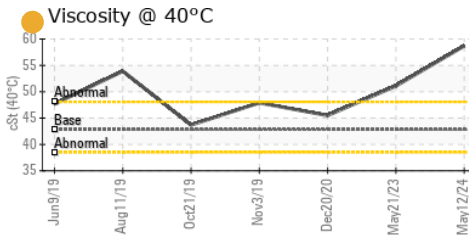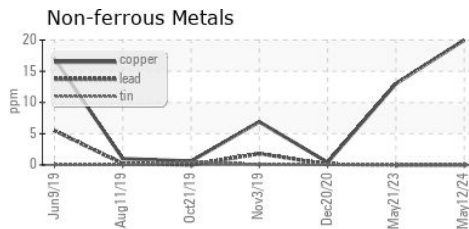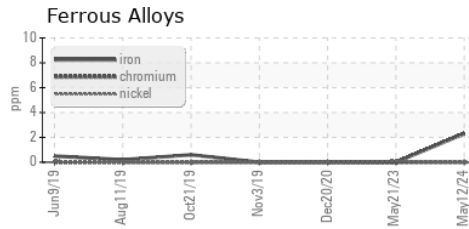

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06211817  
**Lab Number** : 06211817  
**Unique Number** : 11084681  
**Test Package** : IND 2

**Received** : 17 Jun 2024  
**Tested** : 18 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Don Baldrige

**COMPLETE ENGINEERED SOLUTIONS - CES**  
 4772 FRONTIER WAY UNIT 400  
 STOCKTON, CA  
 US 95215

Contact: CHRISTO GINGRAS  
 christo@complete-es.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (800)701-3196

F: (209)753-4211