OIL ANALYSIS REPORT

Sample Rating Trend

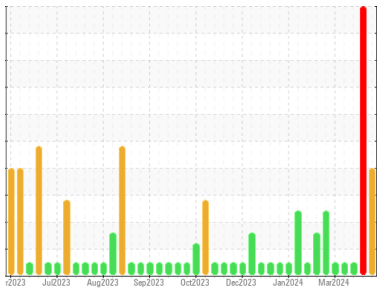

WEAR

Machine Id
Byron Center CAT 2 BYCM02BE
Component
Biogas Engine
Fluid
CHEVRON HDAX 9500 GAS ENGINE OIL 40 (--- GAL)

DIAGNOSIS

▲ Recommendation
We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

▲ Wear
The very high ferrous density (PQ) index indicates that severe wear is occurring. All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0640332**	WC0640329	WC0640328
Sample Date		Client Info		**14 Jun 2024**	02 Apr 2024	25 Mar 2024
Machine Age	hrs	Client Info		**74650**	107968	107839
Oil Age	hrs	Client Info		**48**	573	420
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**SEVERE**	SEVERE	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>4.0	**<1.0**	<1.0	<1.0
Water		WC Method		**NEG**	NEG	NEG
Glycol		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		▲ **24**	---	---
Iron	ppm	ASTM D5185m	>14	**4**	▲ 73	3
Chromium	ppm	ASTM D5185m	>3	**0**	0	0
Nickel	ppm	ASTM D5185m		**<1**	0	0
Titanium	ppm	ASTM D5185m		**0**	<1	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>5	**2**	▲ 10	2
Lead	ppm	ASTM D5185m	>8	**0**	2	2
Copper	ppm	ASTM D5185m	>5	**3**	1	<1
Tin	ppm	ASTM D5185m	>3	**0**	▲ 3	3
Vanadium	ppm	ASTM D5185m		**0**	<1	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**131**	2	2
Barium	ppm	ASTM D5185m		**0**	0	0
Molybdenum	ppm	ASTM D5185m		**6**	1	<1
Manganese	ppm	ASTM D5185m		**<1**	2	0
Magnesium	ppm	ASTM D5185m		**57**	13	16
Calcium	ppm	ASTM D5185m		**1472**	1720	1777
Phosphorus	ppm	ASTM D5185m		**487**	231	286
Zinc	ppm	ASTM D5185m		**573**	314	343
Sulfur	ppm	ASTM D5185m		**3994**	3158	3554

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>180	**15**	122	151
Sodium	ppm	ASTM D5185m	>20	**9**	<1	<1
Potassium	ppm	ASTM D5185m	>20	**2**	0	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		**0**	0.1	0
Nitration	Abs/cm	*ASTM D7624		**2.9**	5.7	5.6
Sulfation	Abs/.1mm	*ASTM D7415		**16.3**	22.4	23.6

OIL ANALYSIS REPORT

PQ

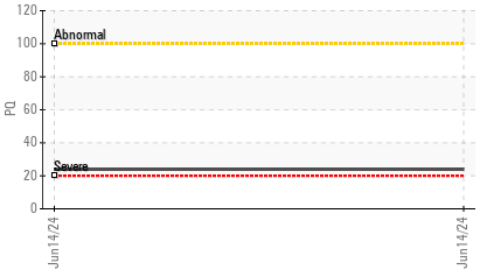

FT-IR (Direct Trend)

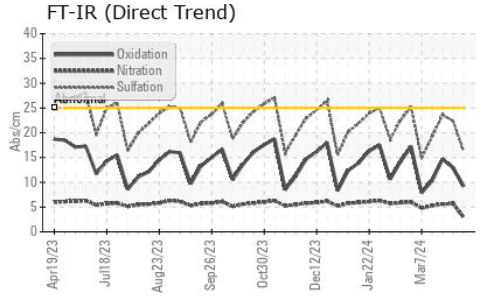

Acid Number

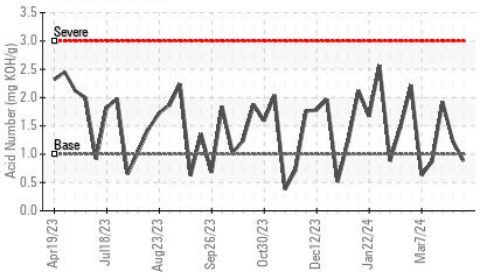

Base Number

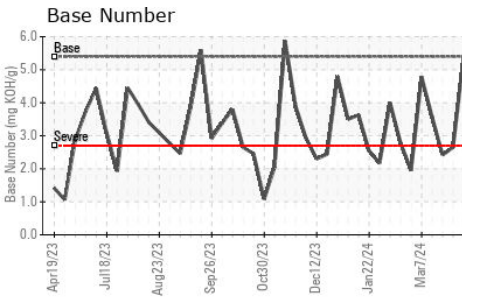

Viscosity @ 100°C

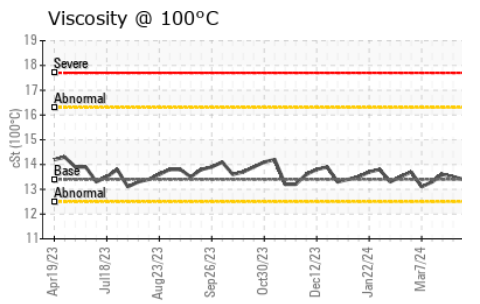

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		**9.2**	12.9	14.7
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	**0.88**	1.22	1.92
Base Number (BN)	mg KOH/g	ASTM D2896	5.4	**5.34**	2.65	2.42

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual		**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.4	**13.4**	13.5	13.6

GRAPHS

Iron (ppm)

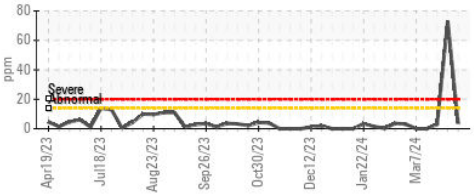

Lead (ppm)

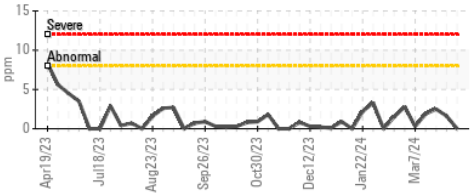

Aluminum (ppm)

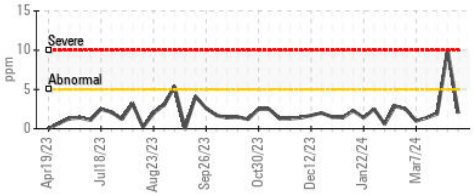

Chromium (ppm)

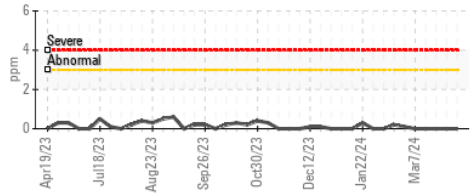

Copper (ppm)

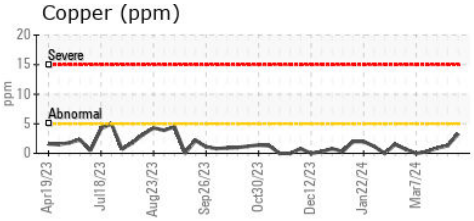

Silicon (ppm)

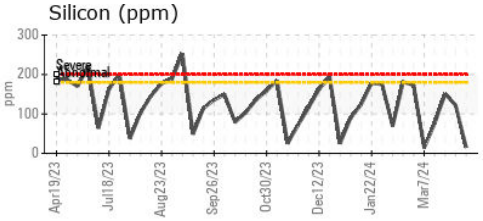

Viscosity @ 100°C

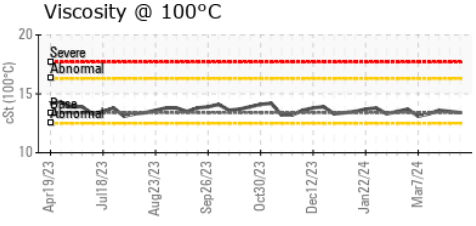

Base Number

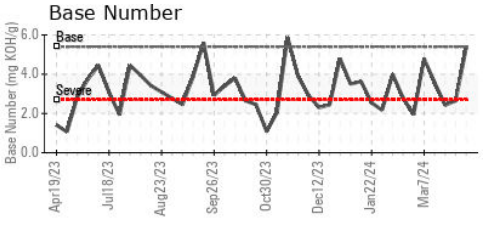

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0640332
Lab Number : 06211926
Unique Number : 11084790
Test Package : MOB 2 (Additional Tests: PQ)

Received : 17 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

EDL NA Recips-Byron Center
Byron Center Powerstation, 10310 South Kent Road
Byron Center, MI
US 49315
Contact: Jake Ripke
Jake.Ripke@edlenergy.com
T:
F: