

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER ASD 40 5088849 (S/N 1090)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017609	KCP47415D	KCP52520
Sample Date		Client Info		05 Jun 2024	01 Feb 2024	07 Dec 2022
Machine Age	hrs	Client Info		58992	56565	50707
Oil Age	hrs	Client Info		0	5858	5458
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m		7	5	7
Tin	ppm		>10	0	<1	<1
Antimony	ppm	ASTM D5185m	-			
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm		11			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	3	9	29
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		1	0	9
Zinc	ppm	ASTM D5185m		19	21	36
Sulfur	ppm	ASTM D5185m		19425	17607	19491
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		3	5	11
Potassium	ppm	ASTM D5185m	>20	0	1	3
Water	%	ASTM D6304	>0.05	0.007	0.005	0.011
ppm Water	ppm	ASTM D6304	>500	78	57	110.1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		23633		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	677		
Particles >21µm		ASTM D7647	>20	<u> </u>		
		ASTM D7647	>4	3		
Particles >38µm				-		
Particles >38µm Particles >71µm		ASTM D7647	>3	0		
		ASTM D7647 ISO 4406 (c)	>3 >/17/13	0 <u>22/20/17</u>		
Particles >71µm				-		


Report Id: WESWESOHKC [WUSCAR] 06212360 (Generated: 06/21/2024 21:07:20) Rev: 1


Contact/Location: Service Manager - WESWESOHKC





OIL ANALYSIS REPORT

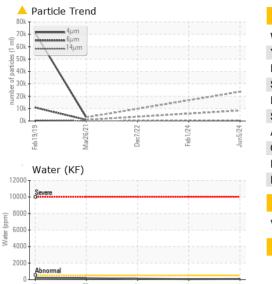







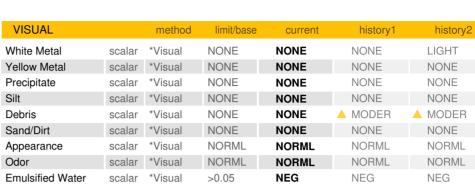

Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	44.4	43.7


current

limit/base

method

Color


SAMPLE IMAGES

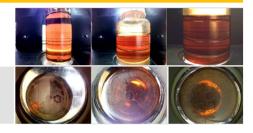

history1

history2

Bottom

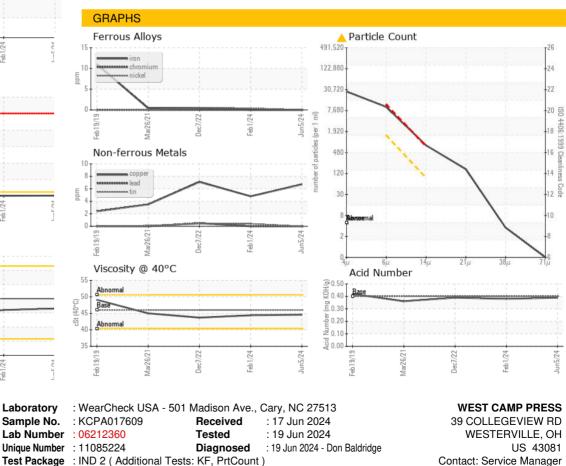

- To discuss this sample report, contact Customer Service at 1-800-237-1369.
- * Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: WESWESOHKC [WUSCAR] 06212360 (Generated: 06/21/2024 21:07:20) Rev: 1

Certificate 12367

Contact/Location: Service Manager - WESWESOHKC

T:

F: