

OIL ANALYSIS REPORT

KAESER SM 11 2217764 (S/N 1274)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

Machine Id

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

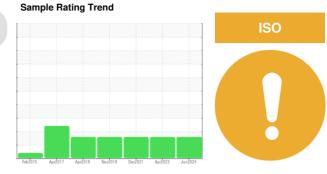


SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016664	KCPA002635	KCP43164
Sample Date		Client Info		12 Jun 2024	18 Apr 2023	10 Dec 2021
Machine Age	hrs	Client Info		14246	13929	13530
Oil Age	hrs	Client Info		1713	0	625
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper		ASTM D5185m		9	6	8
Tin	ppm	ASTM D5185m	>50 >10	9	0	<1
	ppm	ASTM D5185m	>10	U 		<1
Antimony	ppm					
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	18
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	22	57	39
Calcium	ppm	ASTM D5185m	0	0	4	0
Phosphorus	ppm	ASTM D5185m	0	1	2	0
Zinc	ppm	ASTM D5185m	0	8	9	2
Sulfur	ppm	ASTM D5185m	23500	20943	22200	16706
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	1
Sodium	ppm	ASTM D5185m	-	7	14	16
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304		0.014	0.017	0.016
ppm Water	ppm	ASTM D6304	>500	140	176.2	162.0
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4372	5791	6494
Particles >6µm		ASTM D7647	>1300	<u> </u>	2333	1784
Particles >14µm		ASTM D7647	>80	109	▲ 318	<u> </u>
Particles >21µm		ASTM D7647		26	▲ 96	▲ 136
Particles >38µm		ASTM D7647		1	3	▲ 20
Particles >71µm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/18/14	▲ 20/18/15	▲ 18/15
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.39	0.38	0.305
	ing non ing	. 10 1 11 20040	1.0	Contact/	oction: POPPV	

Report Id: ALLLOUTN [WUSCAR] 06212364 (Generated: 06/21/2024 20:53:02) Rev: 1


Contact/Location: BOBBY ? - ALLLOUTN

-COMPRESSOR Built for a lifetime.

OIL ANALYSIS REPORT






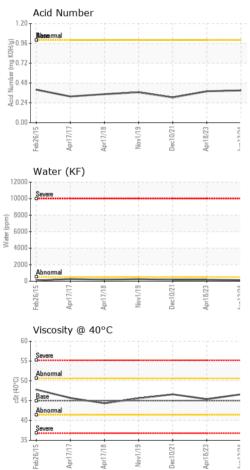

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.6	45.4	46.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

Bottom

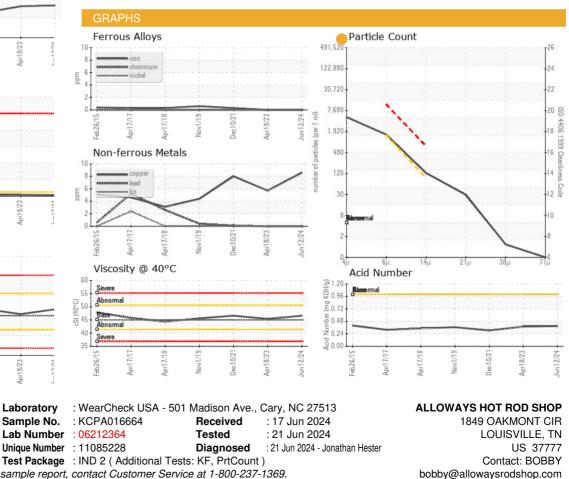

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ALLLOUTN [WUSCAR] 06212364 (Generated: 06/21/2024 20:53:02) Rev: 1

Certificate 12367

Dec10/21

Apr17/17

Anr17/18

-eh26/1

Contact/Location: BOBBY ? - ALLLOUTN Page 2 of 2

T:

F: