

## **OIL ANALYSIS REPORT**

KAESER SM 11 2654594 (S/N 1668)

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

### DIAGNOSIS

Machine Id

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012939	KCPA010147	KCP54942
Sample Date		Client Info		11 Jun 2024	28 Dec 2023	17 Jan 2023
Machine Age	hrs	Client Info		33717	33155	32327
Dil Age	hrs	Client Info		4000	0	600
Dil Changed		Client Info		Changed	N/A	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	2	3	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	8	8	5
Volybdenum	ppm	ASTM D5185m	00	0	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	43	52	69
Calcium	ppm	ASTM D5185m		0	<1	1
Phosphorus	ppm	ASTM D5185m	-	ء <1	6	3
Zinc	ppm	ASTM D5185m		15	9	12
Sulfur	ppm	ASTM D5185m		20401	19482	19763
			It is the second			
CONTAMINANTS	)	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		9	6	14
Potassium	ppm	ASTM D5185m		<1	2	3
Water	%	ASTM D6304		0.013	0.012	0.022
opm Water	ppm	ASTM D6304	>500	135	129	226.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		14585	3633	8848
Particles >6µm		ASTM D7647		<u> </u>	<u> </u>	▲ 3280
Particles >14µm		ASTM D7647	>80	<u> </u>	<b>A</b> 294	<b>2</b> 51
Particles >21µm		ASTM D7647	>20	🔺 252	<mark>▲</mark> 62	<b>6</b> 1
Particles >38µm		ASTM D7647	>4	1	1	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/20/17	▲ 19/18/15	▲ 20/19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.35	0.31

Report Id: POMFON [WUSCAR] 06212366 (Generated: 06/21/2024 21:02:20) Rev: 1


0.35 0.35 0.31 Contact/Location: C. KORB - POMFON




# **OIL ANALYSIS REPORT**






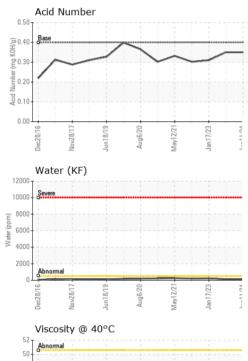




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2	44.4	44.2
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						



Bottom

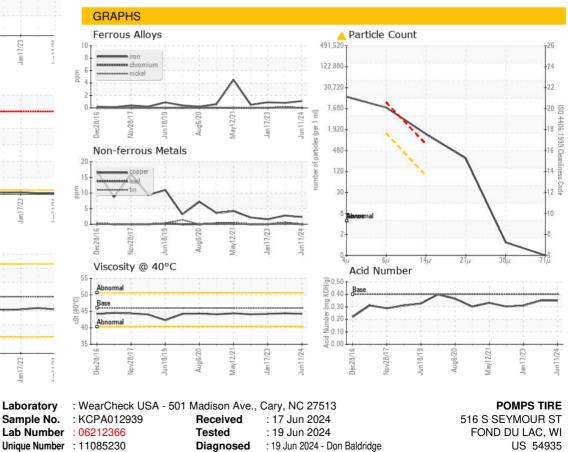

Certificate 12367 Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: POMFON [WUSCAR] 06212366 (Generated: 06/21/2024 21:02:20) Rev: 1

Contact/Location: C. KORB - POMFON

T:

F:

Contact: C. KORB

ckorb@pompstire.com