

OIL ANALYSIS REPORT

Machine Id **KAESER SFC 110S 2619213 (S/N 1003)**

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			10 Apizo10 May2013 Tec		DEGEORES	
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC130936	KC124388	KC101466
Sample Date		Client Info		10 Jun 2024	04 Dec 2023	28 Apr 2023
Machine Age	hrs	Client Info		90412	89709	88518
Oil Age	hrs	Client Info		700	0	2900
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				ABNORMAL	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	7	4
Tin	ppm		>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	37	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	44	<1	3
Calcium	ppm	ASTM D5185m	2	1	<1	0
Phosphorus	ppm	ASTM D5185m		<1	<1	0
Zinc	ppm					0
		ASTM D5185m		15	0	0
CONTAMINANTS		method	limit/base	15 current	0 history1	0 history2
CONTAMINANTS Silicon	ppm		limit/base	-		
	ppm ppm	method		current	history1	history2
Silicon		method ASTM D5185m		current	history1 0	history2 0
Silicon Sodium	ppm	method ASTM D5185m ASTM D5185m	>25	current <1 9	history1 0 0	<mark>history2</mark> 0 0
Silicon Sodium Potassium	ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	current <1 9 0	history1 0 0 0	history2 0 0 0
Silicon Sodium Potassium Water	ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<pre>current <1 9 0 0.022</pre>	history1 0 0 0 0.005	history2 0 0 0 0.006
Silicon Sodium Potassium Water ppm Water	ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	current <1 9 0 0.022 229	history1 0 0 0 0 0.005 56	history2 0 0 0 0 0.006 64.6
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE	ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D5185mASTM D6304ASTM D6304method	>25 >20 >0.05 >500	current <1 9 0 0.022 229 current	history1 0 0 0 0.005 56 history1	history2 0 0 0 0 0.006 64.6 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm	ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D5185mASTM D6304ASTM D6304methodASTM D7647	>25 >20 >0.05 >500 limit/base	current <1 9 0 0.022 229 current 35220	history1 0<	history2 0.006 64.6 history2 9831
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm Particles >6µm	ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304	>25 >20 >0.05 >500 limit/base >1300	current <1 9 0 0.022 229 current 35220 ▲ 10784	history1 0 0 0 0.005 56 history1 10637 2001	history2 0 0 0 0.006 64.6 history2 9831 2349
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05 >500 limit/base >1300 >80	current <1 9 0 0.022 229 current 35220 ▲ 10784 ▲ 681	history1 0 0 0.005 56 history1 10637 2001 97	history2 0 0 0 0.006 64.6 history2 9831 2349 121
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	method ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	 <1 9 0.022 229 current 35220 ▲ 10784 ▲ 681 ▲ 118 	history1 0 0 0.005 56 history1 10637 2001 97 27	history2 0 0 0.006 64.6 history2 9831 2349 121 33
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	 <1 9 0.022 229 current 35220 ▲ 10784 ▲ 681 ▲ 118 0 	history1 0 0 0.005 56 history1 10637 2001 97 27 1	history2 0 0 0.006 64.6 history2 9831 2349 121 33 1
Silicon Sodium Potassium Water ppm Water FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm ESS	method ASTM D5185m ASTM D5304 ASTM D6304 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	 current <1 9 0 0.022 229 current 35220 ▲ 10784 ▲ 681 ▲ 118 0 0 	history1 0 0 0.005 56 history1 10637 2001 97 27 1 0	history2 0 0 0.006 64.6 history2 9831 2349 121 33 1 0


Sample Rating Trend


ISO





OIL ANALYSIS REPORT

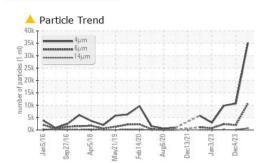

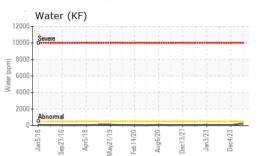










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.1	45.6	44.4
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						

Color



Bottom

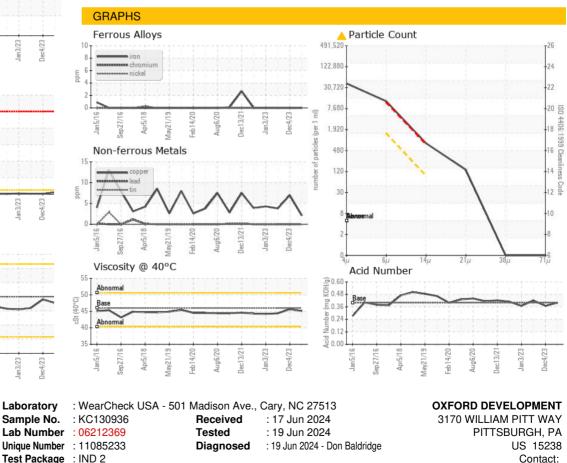



To discuss this sample report, contact Customer Service at 1-800-237-1369

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: OXFPIT [WUSCAR] 06212369 (Generated: 06/21/2024 21:01:08) Rev: 1

Contact/Location: ? ? - OXFPIT Page 2 of 2

T:

F: