

OIL ANALYSIS REPORT

SAMPLE INFORMATION method

Sample Rating Trend



Machine Id KAESER ASD 25T 4549507 (S/N 1063)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA019196	KCPA000068	KCP38059
Sample Date		Client Info		14 Jun 2024	21 Mar 2023	07 Apr 2022
Machine Age	hrs	Client Info		18003	16830	16830
Oil Age	hrs	Client Info		4000	0	2500
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	1	<1
_ead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		2	2	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ρριιι		11 11 /1			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	1	72	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Vagnesium	ppm	ASTM D5185m	90	68	80	61
Calcium	ppm	ASTM D5185m	2	0	2	0
Phosphorus	ppm	ASTM D5185m		1	4	10
Zinc	ppm	ASTM D5185m		12	3	10
Sulfur	ppm	ASTM D5185m		20818	21725	14580
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		21	6	18
Potassium	ppm	ASTM D5185m	>20	2	0	4
Water	%	ASTM D6304	>0.05	0.023	0.020	0.014
opm Water	ppm	ASTM D6304	>500	235	207.4	149.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1895	37564	2990
Particles >6µm		ASTM D7647		517	<u> </u>	487
Particles >14µm		ASTM D7647	>80	26	A 360	14
Particles >21µm		ASTM D7647	>20	4	4 6	2
Particles >38µm		ASTM D7647	>4	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	2 2/21/16	16/11
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN) 45:51) Rev: 1	mg KOH/g	ASTM D8045	0.4	0.33 Contact/Loca	0.42 ation: Pat Herrm	0.31 ann - KAEME


Report Id: KAEMEN [WUSCAR] 06212417 (Generated: 06/19/2024 21:45:51) Rev: 1


Contact/Location: Pat Herrmann - KAEMEN



OIL ANALYSIS REPORT






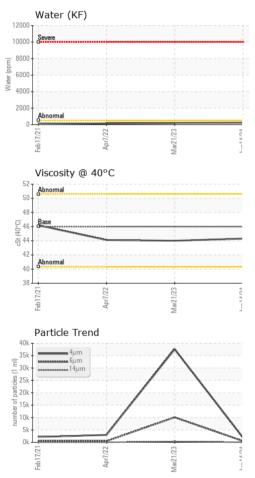

Certificate 12367

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.0	44.1
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom					()	

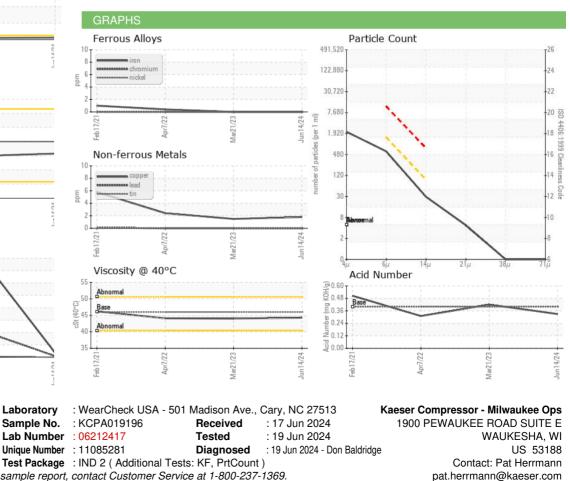

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KAEMEN [WUSCAR] 06212417 (Generated: 06/19/2024 21:45:51) Rev: 1

Contact/Location: Pat Herrmann - KAEMEN

E:

T: (855)523-7373