

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id KAESER SM 7.5 4907394 (S/N 1154)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018809	KCP52196	KCP43357
Sample Date		Client Info		12 Jun 2024	07 Dec 2022	11 Nov 2021
Machine Age	hrs	Client Info		39113	32869	29151
Oil Age	hrs	Client Info		2828	3000	3153
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum		ASTM D5185m		0	<1	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
	ppm			-	3	12
Copper	ppm	ASTM D5185m		4		
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	17
Barium	ppm	ASTM D5185m	90	<1	<1	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	100	32	46	31
Calcium	ppm	ASTM D5185m	0	0	<1	0
Phosphorus	ppm	ASTM D5185m	0	1	4	3
Zinc	ppm	ASTM D5185m	0	30	27	60
Sulfur	ppm	ASTM D5185m	23500	20989	22033	18317
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium		ASTM D5185m	220	12	22	10
Potassium	ppm	ASTM D5185m	>20	<1	22	<1
	ppm			< 1		
Water ppm Water	%	ASTM D6304 ASTM D6304	>0.05 >500	204	▲ 0.164▲ 1646.7	0.013
••	ppm					
FLUID CLEANLIN	1235	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	. 1000	2246	10998	5255
Particles >6µm		ASTM D7647		444	▲ 2843	1359
Particles >14µm		ASTM D7647	>80	12	▲ 175	90
Particles >21µm		ASTM D7647		2	<u>▲</u> 53	18
Particles >38µm		ASTM D7647	>4	0	<u> </u>	1
Particles >71µm		ASTM D7647		0	1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/11	1 /19/15	18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN) :05:57) Rev: 1	mg KOH/g	ASTM D8045	1.0 Contact	0.30 /Location: SERV		0.331 2 2 - TRIBLICK


Report Id: TRIBUCKY [WUSCAR] 06212451 (Generated: 06/21/2024 21:05:57) Rev: 1


Contact/Location: SERVICE MANAGER ? - TRIBUCKY




OIL ANALYSIS REPORT

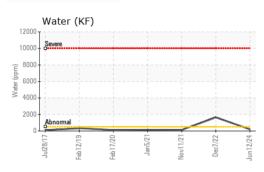




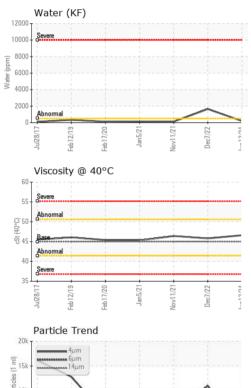



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.6	45.8	46.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Pattam						

Bottom

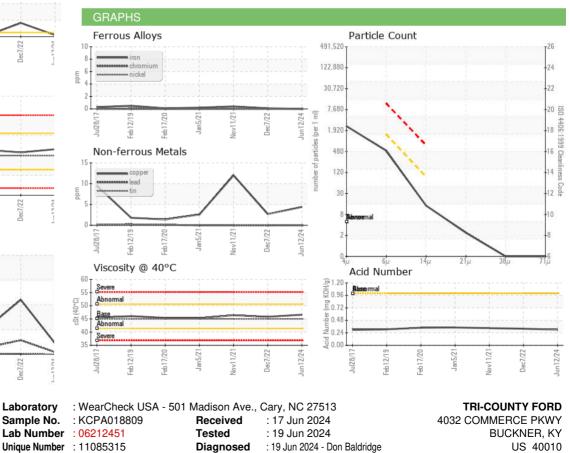

Certificate L2367 Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TRIBUCKY [WUSCAR] 06212451 (Generated: 06/21/2024 21:05:57) Rev: 1

Contact/Location: SERVICE MANAGER ? - TRIBUCKY

T:

F:

Contact: SERVICE MANAGER