

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

8661034 (S/N 1007) Component Compressor

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017720	KCPA000778	KCPA002275
Sample Date		Client Info		12 Jun 2024	02 Nov 2023	21 Jun 2023
Machine Age	hrs	Client Info		11684	5967	3147
Oil Age	hrs	Client Info		5717	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				ATTENTION	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	9	16	7
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	5	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	6	<1	10
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		1	<1	0
Zinc	ppm	ASTM D5185m		4	4	12
Sulfur	ppm	ASTM D5185m		18251	16110	18460
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		4	1	0
Potassium	ppm	ASTM D5185m	>20	0	<1	1
Water	%	ASTM D6304	>0.05	0.010	0.006	0.012
ppm Water	ppm	ASTM D6304	>500	109	65.0	121.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2807	281	
Particles >6µm		ASTM D7647	>1300	1053	94	
Particles >14µm		ASTM D7647	>80	<mark> </mark> 152	10	
Particles >21µm		ASTM D7647	>20	<mark> </mark> 37	2	
Particles >38µm		ASTM D7647	>4	2	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	e 19/17/14	15/14/10	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.37	0.41


Contact/Location: Service Manager - OUTFONKC Page 1 of 2




OIL ANALYSIS REPORT






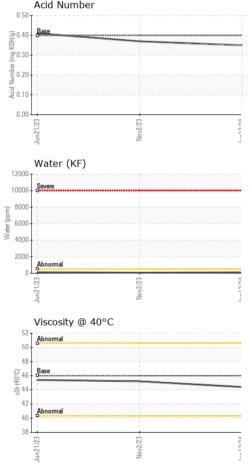



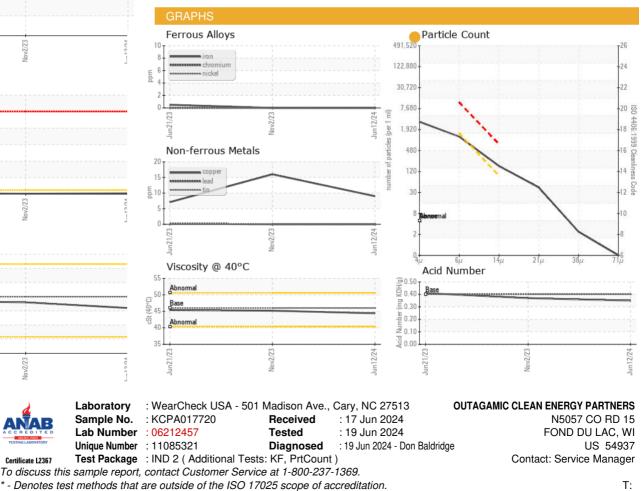



Certificate 12367

Contact/Location: Service Manager - OUTFONKC

F: