

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

8102789 (S/N 1551)

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018903		
Sample Date		Client Info		13 Jun 2024		
Machine Age	hrs	Client Info		2875		
Oil Age	hrs	Client Info		576		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	6		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	21		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	47		
Calcium	ppm	ASTM D5185m	2	<1		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		12		
Sulfur	ppm	ASTM D5185m		18919		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		15		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.015		
ppm Water	ppm	ASTM D6304	>500	152		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4908		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	172		
Particles >21µm		ASTM D7647	>20	15		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	 19/19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.29		



Built for a lifetime."

🔺 Particle Trend 51 _4μm 6µm Ê 4 -14µm sel 3k 2 5 11 0 Jun13/24 Jun13/24



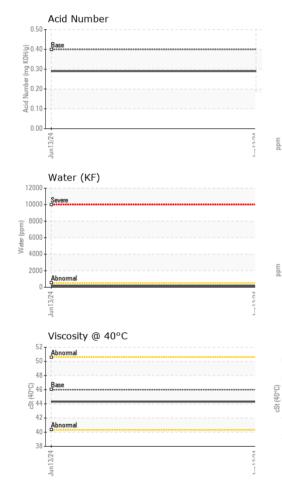

OIL ANALYSIS REPORT

_	VISUAL		method	limit/base	current	history1	histor
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPE	RTIES	method	limit/base	current	history1	histo
	Visc @ 40°C	cSt	ASTM D445	46	44.3		
	SAMPLE IMAG	ES	method	limit/base	current	history1	histo
	Color					no image	no ima
						Ū	
	Bottom				(Day)	no image	no ima
	GRAPHS						
	Ferrous Alloys				Particle Coun	t	
	10 8iron			491,520			
	chromium			122,880	-		
				30,720			
	2-						
				7,680			
	Jun 13/24			Jun 13/24 (per 1 ml			
		tala		1202 Jun 1202 480		N	
	Non-ferrous Met	lais		of part			
	8 - copper			jag 120	-	1	
	E 6			30			
	T					1	
	2-				Berevernal		
	3/24 0	**************		3/24			
	Jun13/24			Jun13/24			
	Viscosity @ 40°	С		2	4 من Acid Number	14μ 21μ	38µ
	55 Abnormal						
	50 +			(b)H0, 10, 10 (b)H0, 10, 10 (b)H0, 10, 10 (b)H0, 10 (c) 10			*****
	± 45			<u> </u> し.30 当 0 20			
	40 - Abnormal			N 0.10			
	35						
				Jun13/24	Jun13/24		
	Jun 13/24						

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - CHEMENWI

T:

F: