


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7911705 (S/N 1165)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Sep	2022	Nov2023 Jun202	4	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017630	KCPA000767	KCP46179
Sample Date		Client Info		12 Jun 2024	03 Nov 2023	15 Sep 2022
Machine Age	hrs	Client Info		9184	7820	3059
Oil Age	hrs	Client Info		1365	0	3059
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	1
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	8	5
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	15	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m	90	47	9	35
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		1	<1	2
Zinc	ppm	ASTM D5185m		17	3	6
Sulfur	ppm	ASTM D5185m		18897	16788	22327
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		8	7	6
Potassium	ppm	ASTM D5185m	>20	2	3	3
Water	%	ASTM D6304	>0.05	0.024	0.010	0.020
ppm Water	ppm	ASTM D6304	>500	243	108.3	206.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		28703	3746	22652
Particles >6µm		ASTM D7647	>1300	4 9285	1140	△ 9527
Particles >14µm		ASTM D7647	>80	4 313	44	<u></u> 1014
Particles >21µm		ASTM D7647	>20	45	11	<u>▲</u> 132
Particles >38µm		ASTM D7647	>4	2	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	22/20/15	19/17/13	<u>22/20/17</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.33	0.37



OIL ANALYSIS REPORT

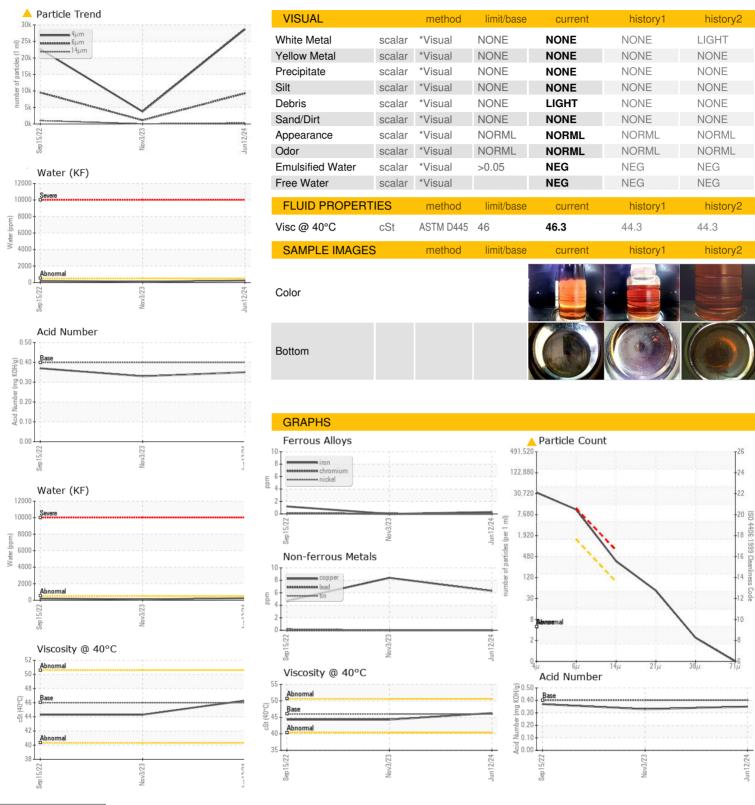





Laboratory

Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA017630 : 06212461 Unique Number : 11085325

Received : 17 Jun 2024 **Tested** Diagnosed

: 19 Jun 2024

: 19 Jun 2024 - Don Baldridge

1250 S HICKORY ST FOND DU LAC, WI US 54937

NEMESIS METALS

Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: