




# OIL ANALYSIS REPORT

Sample Rating Trend

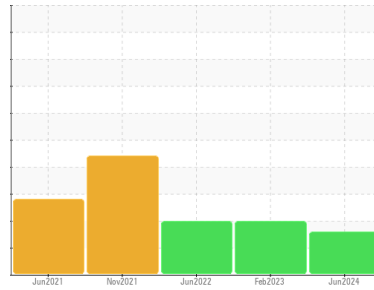

ISO



Machine Id  
**KAESER ASD 40T 5409674 (S/N 2447)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA019266</b>	KCP55052	KCP41386
Sample Date	Client Info			<b>12 Jun 2024</b>	02 Feb 2023	29 Jun 2022
Machine Age	hrs	Client Info		<b>58431</b>	52580	49091
Oil Age	hrs	Client Info		<b>0</b>	0	49091
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	1	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	3	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	1	0
Copper	ppm	ASTM D5185m	>50	<b>5</b>	25	10
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	90	<b>27</b>	1	8
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>2</b>	4	7
Zinc	ppm	ASTM D5185m		<b>39</b>	6	25
Sulfur	ppm	ASTM D5185m		<b>20532</b>	20145	20796

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	0
Sodium	ppm	ASTM D5185m		<b>13</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Water	%	ASTM D6304	>0.05	<b>0.016</b>	0.003	▲ 0.437
ppm Water	ppm	ASTM D6304	>500	<b>166</b>	33.4	▲ 4370

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>12804</b>	187603	---
Particles >6µm		ASTM D7647	>1300	▲ <b>4204</b>	▲ 110141	---
Particles >14µm		ASTM D7647	>80	▲ <b>157</b>	▲ 8716	---
Particles >21µm		ASTM D7647	>20	▲ <b>24</b>	▲ 898	---
Particles >38µm		ASTM D7647	>4	<b>1</b>	▲ 17	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>21/19/14</b>	▲ 25/24/20	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.36</b>	0.35	0.35


# OIL ANALYSIS REPORT

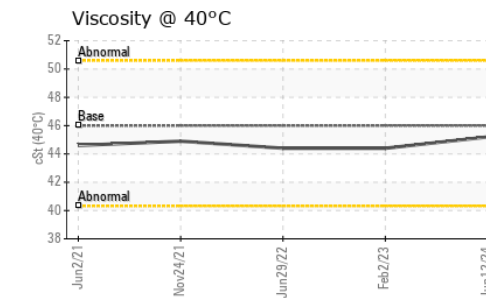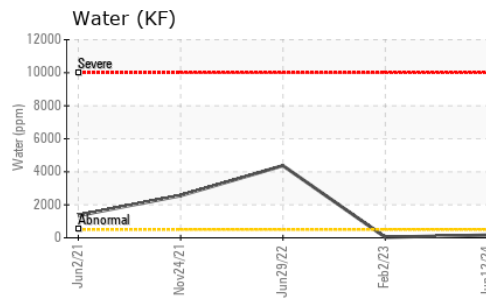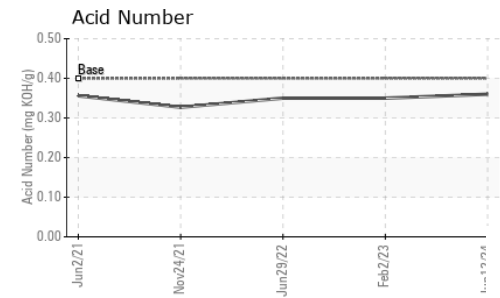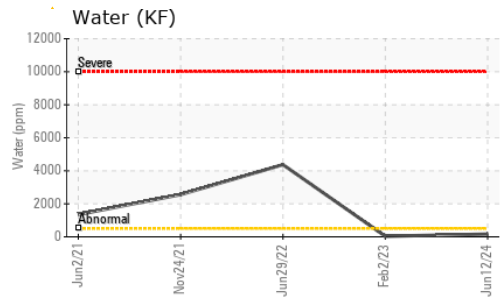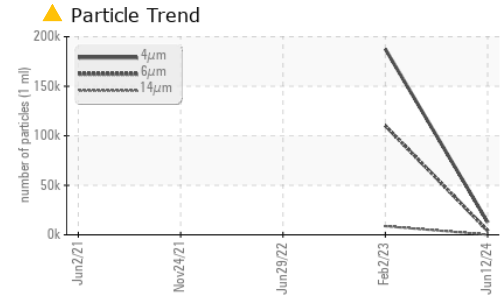





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.2	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

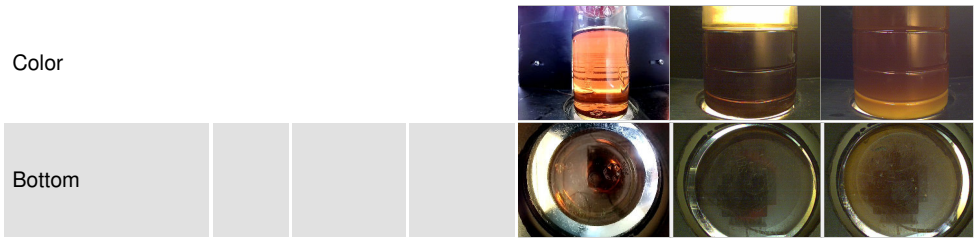

## GRAPHS

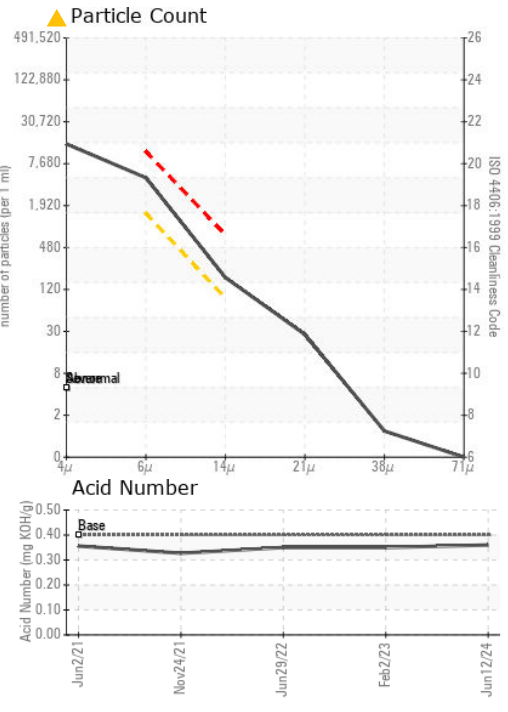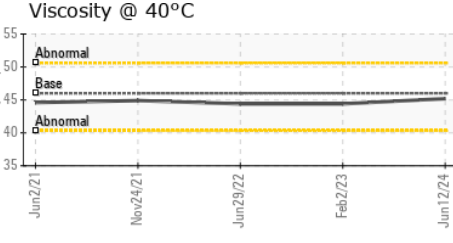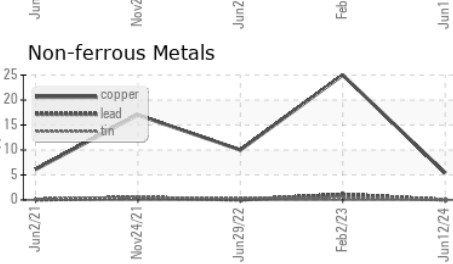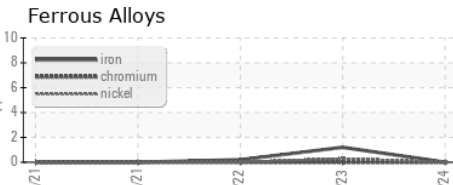

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA019266 **Received** : 17 Jun 2024  
**Lab Number** : 06212467 **Tested** : 19 Jun 2024  
**Unique Number** : 11085331 **Diagnosed** : 19 Jun 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**POMPS TIRE SERVICE**  
 1301 BUSSE RD  
 ELK GROVE VILLAGE, IL  
 US 60007  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)