




OIL ANALYSIS REPORT

Sample Rating Trend

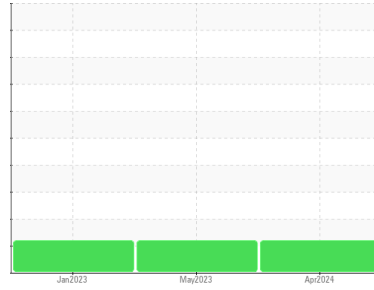

GLYCOL



Area

TRUCK - URBAN

Machine Id

KENWORTH 95

Component

Diesel Engine

Fluid

SHELL Rotella T5 15W-40 (10 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PE0003157	PE0001356	PE0000479
Sample Date	Client Info		25 Apr 2024	12 May 2023	16 Jan 2023
Machine Age	hrs	Client Info	32322	5615	4713
Oil Age	hrs	Client Info	486	902	838
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	37	47	31
Chromium	ppm	ASTM D5185m	>20	2	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	2	3
Lead	ppm	ASTM D5185m	>40	<1	2	4
Copper	ppm	ASTM D5185m	>330	1	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		17	20	25
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		57	81	77
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		784	81	121
Calcium	ppm	ASTM D5185m		1282	2160	2021
Phosphorus	ppm	ASTM D5185m		1034	987	953
Zinc	ppm	ASTM D5185m		1242	1226	1175
Sulfur	ppm	ASTM D5185m		3445	4102	3926

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	10	6	5
Sodium	ppm	ASTM D5185m		5	7	6
Potassium	ppm	ASTM D5185m	>20	▲ 77	▲ 176	▲ 96
Glycol	%	*ASTM D2982		NEG	NEG	NEG





INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.8	1.1	0.7
Nitration	Abs/cm	*ASTM D7624	>20	13.0	13.6	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	27.6	23.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.7	26.1	20.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.2	5.1	6.3





OIL ANALYSIS REPORT

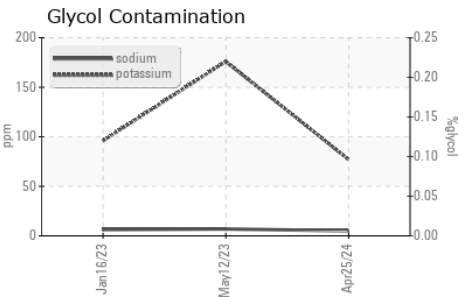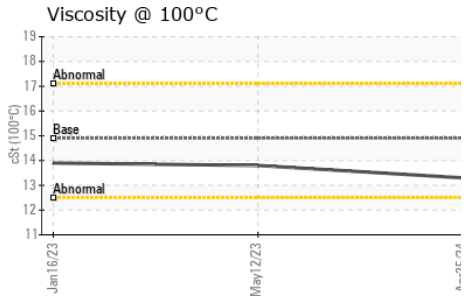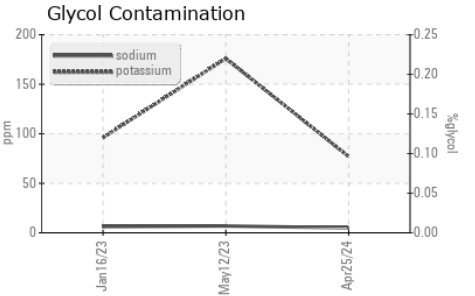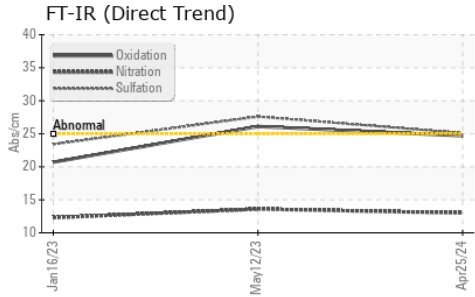

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	13.3	13.8	13.9

GRAPHS

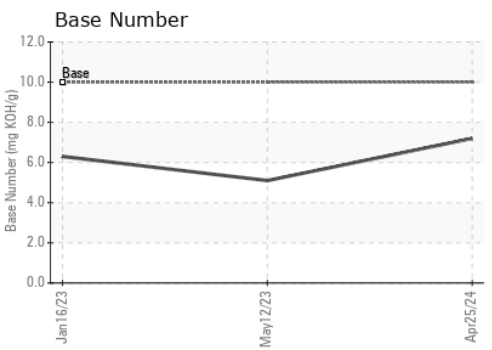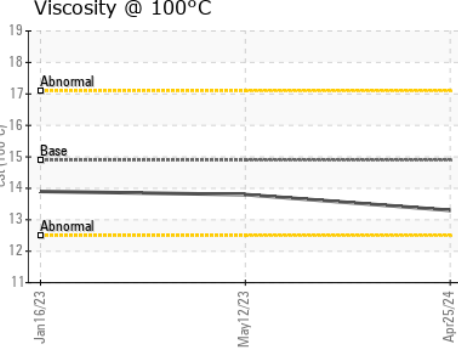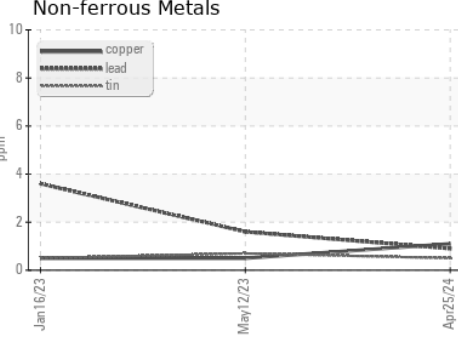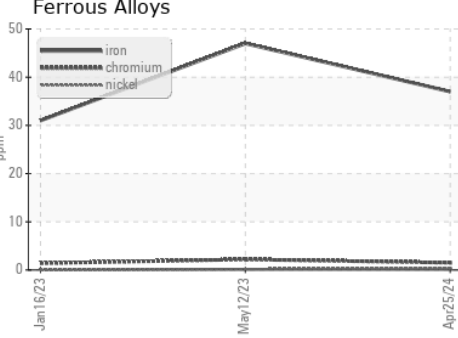

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003157 **Received** : 17 Jun 2024
Lab Number : **06212756** **Tested** : 19 Jun 2024
Unique Number : 11085620 **Diagnosed** : 19 Jun 2024 - Angela Borella
Test Package : CONST (Additional Tests: FT-IR, Glycol, ICP, KV100, SCREEN, TBN)

PetroCard - Aberdeen
 110 Commerce St
 Aberdeen, WA
 US 98520
 Contact: Sean McNealley
 smcnealley@petrocard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)