




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 5027
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

Sample Rating Trend

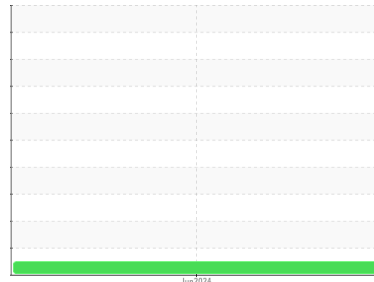

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0838245	---	---
Sample Date	Client Info		11 Jun 2024	---	---
Machine Age	hrs	Client Info	867	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	27	---
Chromium	ppm	ASTM D5185m	>20	1	---
Nickel	ppm	ASTM D5185m	>2	<1	---
Titanium	ppm	ASTM D5185m	>2	76	---
Silver	ppm	ASTM D5185m	>2	0	---
Aluminum	ppm	ASTM D5185m	>25	3	---
Lead	ppm	ASTM D5185m	>40	0	---
Copper	ppm	ASTM D5185m	>330	2	---
Tin	ppm	ASTM D5185m	>15	0	---
Vanadium	ppm	ASTM D5185m		<1	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	134	---
Barium	ppm	ASTM D5185m	10	0	---
Molybdenum	ppm	ASTM D5185m	100	3	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m	450	418	---
Calcium	ppm	ASTM D5185m	3000	1649	---
Phosphorus	ppm	ASTM D5185m	1150	1031	---
Zinc	ppm	ASTM D5185m	1350	1171	---
Sulfur	ppm	ASTM D5185m	4250	4415	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	---
Sodium	ppm	ASTM D5185m	>216	2	---
Potassium	ppm	ASTM D5185m	>20	5	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.8	---







OIL ANALYSIS REPORT

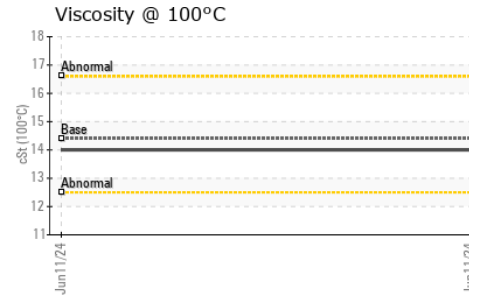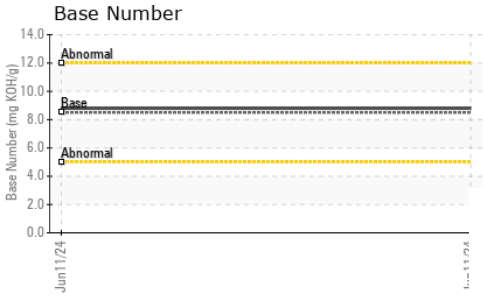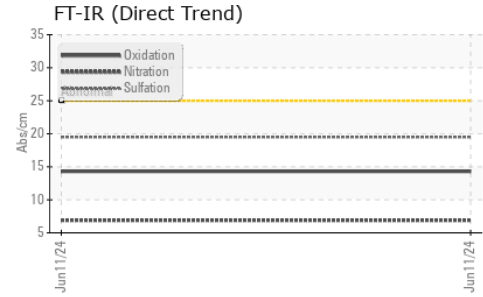

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	---	---

GRAPHS

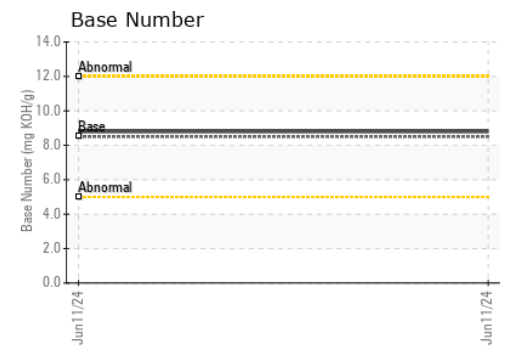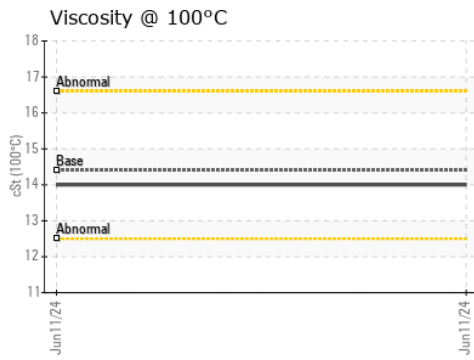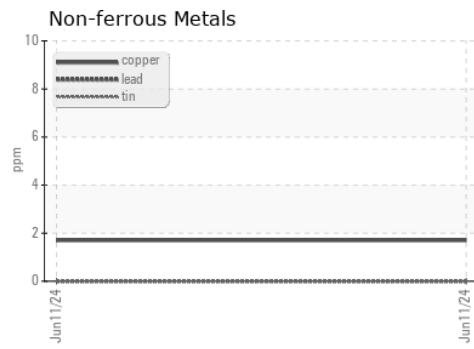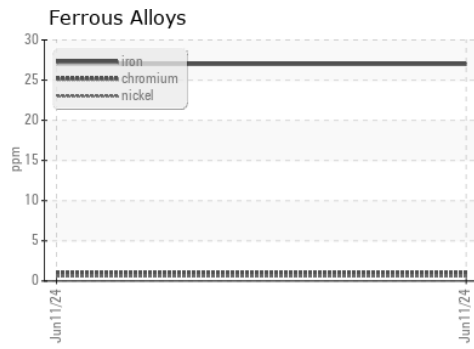

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0838245 **Received** : 17 Jun 2024
Lab Number : **06212874** **Tested** : 19 Jun 2024
Unique Number : 11085738 **Diagnosed** : 19 Jun 2024 - Wes Davis
Test Package : FLEET

ENVIRO SERVICES RENTALS
 PO BOX 339
 FARMERVILLE, LA
 US 71241
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (318)368-9111
F: