




# OIL ANALYSIS REPORT

## Sample Rating Trend

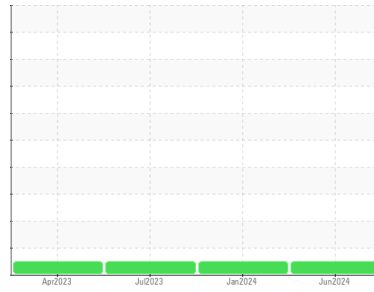

**NORMAL**



Area  
**BARTO**  
 Machine Id  
**7082 [BARTO]**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0006514</b>	SBP0005060	SBP0004374
Sample Date	Client Info		<b>04 Jun 2024</b>	26 Jan 2024	25 Jul 2023
Machine Age	mls	Client Info	<b>196442</b>	157144	119872
Oil Age	mls	Client Info	<b>39298</b>	37272	41082
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>22</b>	23	30
Chromium	ppm	ASTM D5185m >5	<b>1</b>	1	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>5</b>	6	9
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>6</b>	11	26
Tin	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	0	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	63	61
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>1004</b>	1015	952
Calcium	ppm	ASTM D5185m 1070	<b>1129</b>	1128	1398
Phosphorus	ppm	ASTM D5185m 1150	<b>1070</b>	1048	1034
Zinc	ppm	ASTM D5185m 1270	<b>1327</b>	1326	1351
Sulfur	ppm	ASTM D5185m 2060	<b>2932</b>	2544	2946

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	3	4
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>7</b>	8	21

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	9.7	11.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.9</b>	21.8	22.9


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.0</b>	20.1	21.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.6</b>	6.3	6.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

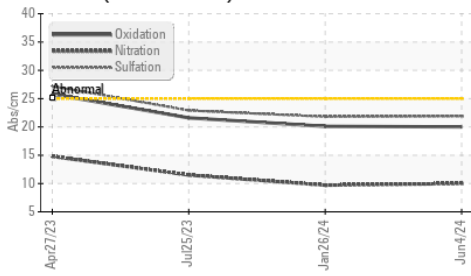

Base Number

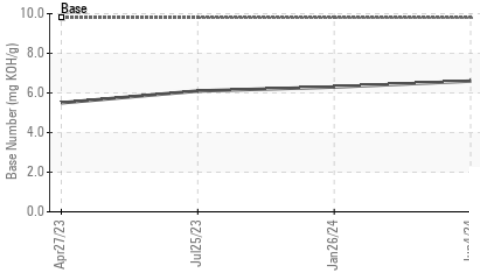





Viscosity @ 100°C

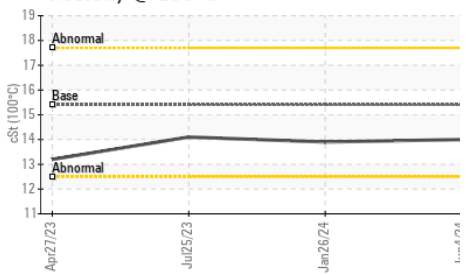

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.9	14.1

## GRAPHS

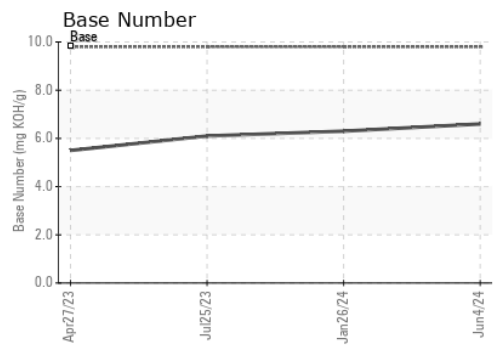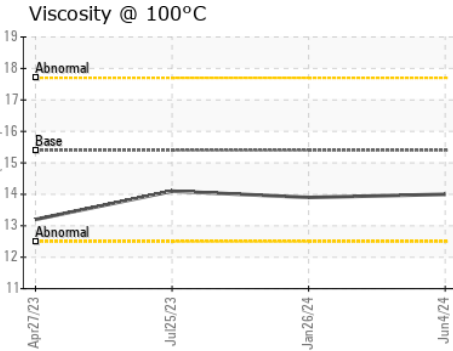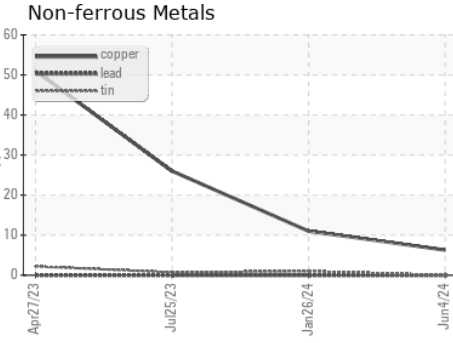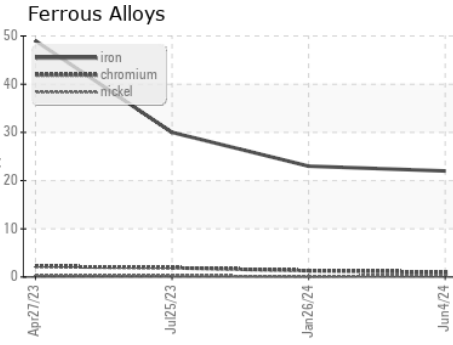

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0006514      **Received** : 17 Jun 2024  
**Lab Number** : **06212893**      **Tested** : 19 Jun 2024  
**Unique Number** : 11085757      **Diagnosed** : 19 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - BARTO**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: