




OIL ANALYSIS REPORT

Sample Rating Trend

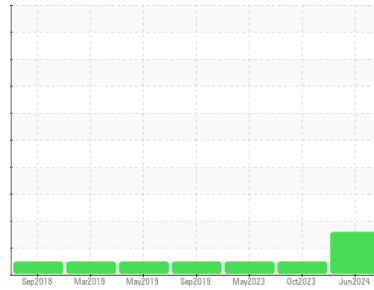

Machine Id
FSP134331

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Iron ppm levels are abnormal. Aluminum ppm levels are marginal. Cylinder, crank, or cam shaft wear is indicated.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0875918	WC0852172	WC0787465
Sample Date	Client Info		04 Jun 2024	04 Oct 2023	02 May 2023
Machine Age	mls	Client Info	251875	230955	0
Oil Age	mls	Client Info	60000	0	0
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 95	26	55
Chromium	ppm	ASTM D5185m >20	3	<1	2
Nickel	ppm	ASTM D5185m >4	2	0	2
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	▲ 30	6	8
Lead	ppm	ASTM D5185m >40	3	0	2
Copper	ppm	ASTM D5185m >330	3	<1	3
Tin	ppm	ASTM D5185m >15	<1	0	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	16	63	3
Barium	ppm	ASTM D5185m 10	<1	5	0
Molybdenum	ppm	ASTM D5185m 100	87	72	71
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m 450	870	366	1062
Calcium	ppm	ASTM D5185m 3000	1502	1651	1180
Phosphorus	ppm	ASTM D5185m 1150	1195	1033	1077
Zinc	ppm	ASTM D5185m 1350	1403	1241	1400
Sulfur	ppm	ASTM D5185m 4250	3181	3506	3908

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	14	14	8
Sodium	ppm	ASTM D5185m >158	7	3	8
Potassium	ppm	ASTM D5185m >20	55	6	6

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	2.2	0.7	1.3
Nitration	Abs/cm	*ASTM D7624 >20	16.7	11.4	15.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	33.0	22.0	29.2


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	30.5	18.7	28.5
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	6.6	7.8	7.0




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

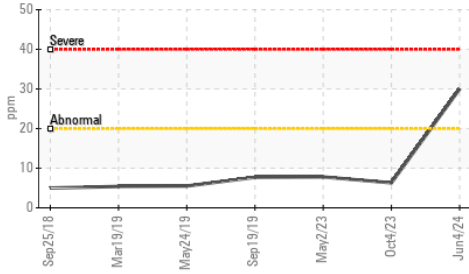


● FT-IR (Direct Trend)

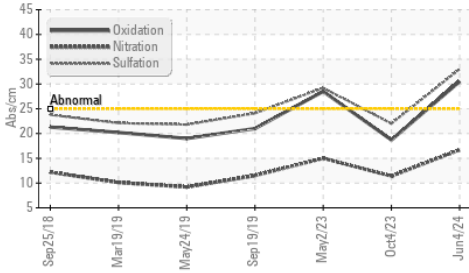


● FT-IR (Direct Trend)

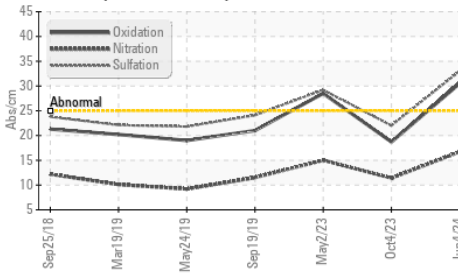

Base Number

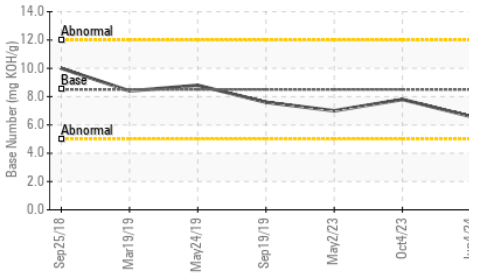

Viscosity @ 100°C

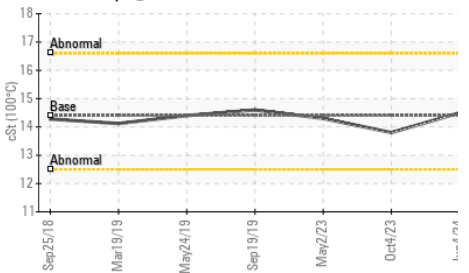


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.5	13.8

GRAPHS


▲ Ferrous Alloys

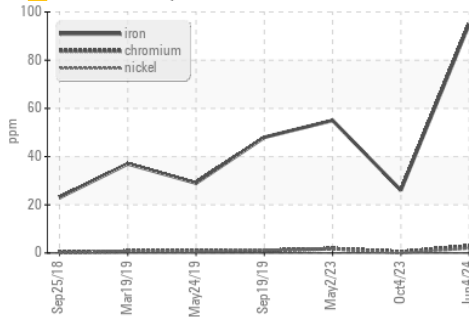


Non-ferrous Metals

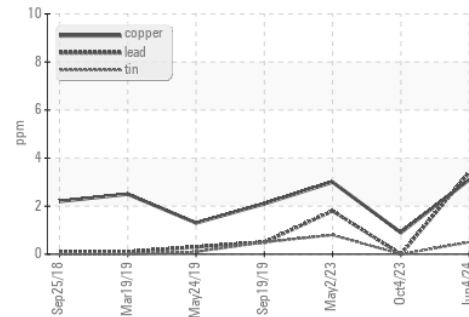

Viscosity @ 100°C

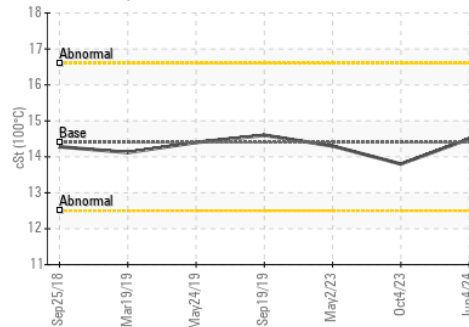

Base Number

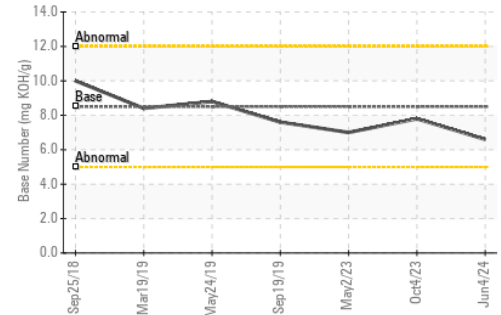

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0875918

Lab Number : 06212952

Unique Number : 11085816

Test Package : FLEET

Received : 17 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Angela Borella

FRESHPOINT

8801 EXCHANGE DRIVE

ORLANDO, FL

US 32809

Contact: CRAIG EVANS

evans_craig@sbcglobal.net

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)