




# OIL ANALYSIS REPORT

Sample Rating Trend

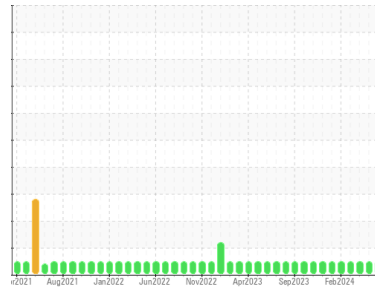

**NORMAL**



Area  
**ARIZONA GROUPING**  
 Machine Id  
**2015 MACK 2696**  
 Component  
**Diesel Engine**  
 Fluid  
**NAPA Motor Oil 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0935456</b>	WC0899589	WC0899590
Sample Date	Client Info	<b>14 Jun 2024</b>	04 May 2024	08 Apr 2024
Machine Age	hrs Client Info	<b>17952</b>	17768	17540
Oil Age	hrs Client Info	<b>2261</b>	2077	1849
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>34</b>	35	27
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >5	<b>2</b>	2	2
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>6</b>	6	5
Lead	ppm ASTM D5185m >40	<b>3</b>	4	3
Copper	ppm ASTM D5185m >330	<b>6</b>	7	2
Tin	ppm ASTM D5185m >15	<b>2</b>	2	2
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>27</b>	27	25
Barium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>16</b>	17	16
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>643</b>	633	689
Calcium	ppm ASTM D5185m	<b>1354</b>	1419	1403
Phosphorus	ppm ASTM D5185m	<b>787</b>	836	825
Zinc	ppm ASTM D5185m	<b>875</b>	928	943
Sulfur	ppm ASTM D5185m	<b>2841</b>	2982	3493

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>9</b>	9	8
Sodium	ppm ASTM D5185m	<b>23</b>	23	21
Potassium	ppm ASTM D5185m >20	<b>6</b>	6	5

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.6</b>	0.7	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>11.7</b>	12.0	11.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>26.8</b>	28.1	26.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>25.4</b>	27.1	24.9
Base Number (BN)	mg KOH/g ASTM D2896	<b>4.0</b>	3.3	3.8







# OIL ANALYSIS REPORT

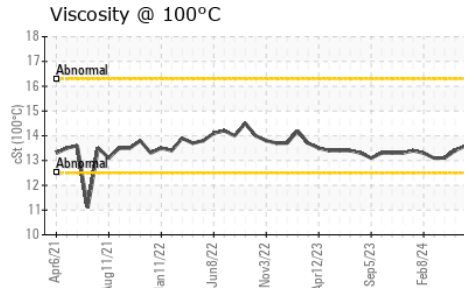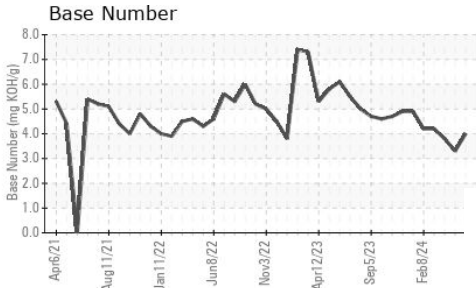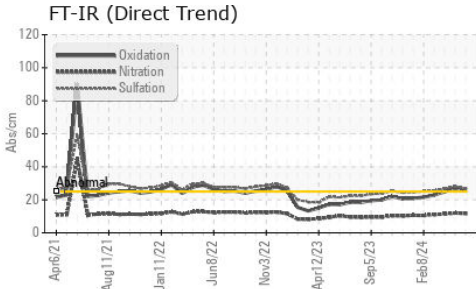

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.6</b>	13.4	13.1

### GRAPHS

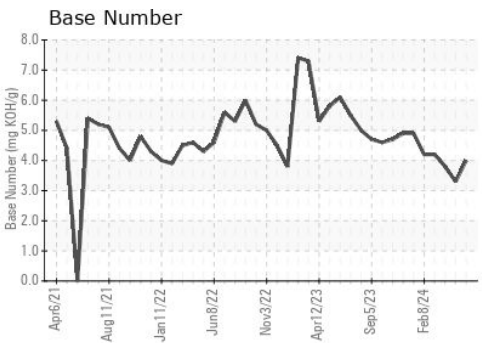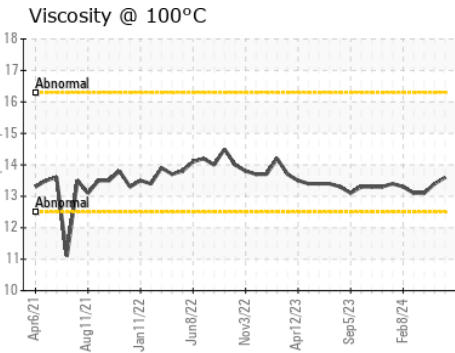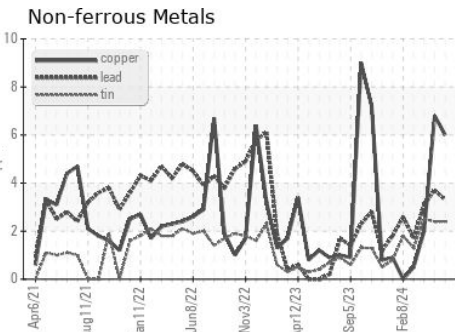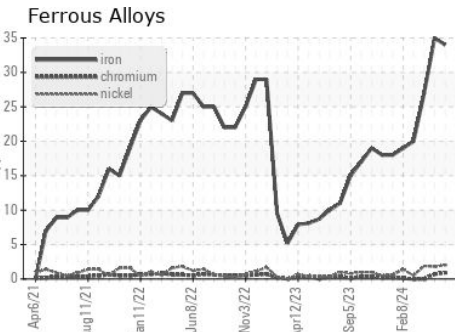

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935456      **Received** : 17 Jun 2024  
**Lab Number** : **06212977**      **Tested** : 19 Jun 2024  
**Unique Number** : 11085841      **Diagnosed** : 19 Jun 2024 - Angela Borella  
**Test Package** : FLEET

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: CATHY ROSA  
 c.rosa@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: