




# OIL ANALYSIS REPORT

Sample Rating Trend

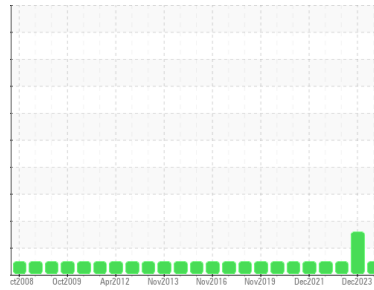

**NORMAL**



Area  
**REPAIR / TEST ROOM**  
 Machine Id  
**TEST BENCH D**  
 Component  
**Hydraulic System**  
 Fluid  
**MIL-PRF-5606H (250 GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>AN35267</b>	AN35275	AN35297
Sample Date	Client Info	<b>05 Jun 2024</b>	07 Dec 2023	12 Dec 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	0
Chromium	ppm	ASTM D5185m >20	0	0
Nickel	ppm	ASTM D5185m >20	0	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	<1
Aluminum	ppm	ASTM D5185m >20	0	0
Lead	ppm	ASTM D5185m >20	0	0
Copper	ppm	ASTM D5185m >20	0	0
Tin	ppm	ASTM D5185m >20	0	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0
Barium	ppm	ASTM D5185m	0	1
Molybdenum	ppm	ASTM D5185m	0	0
Manganese	ppm	ASTM D5185m	0	0
Magnesium	ppm	ASTM D5185m	0	<1
Calcium	ppm	ASTM D5185m	0	<1
Phosphorus	ppm	ASTM D5185m	<b>752</b>	801
Zinc	ppm	ASTM D5185m	<b>&lt;1</b>	0
Sulfur	ppm	ASTM D5185m	<b>17</b>	46

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1
Sodium	ppm	ASTM D5185m	<b>2</b>	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0
Water	%	ASTM D6304 >0.05	<b>0.015</b>	0.010
ppm Water	ppm	ASTM D6304 >500	<b>150</b>	107

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>103</b>	▲ 21188	653
Particles >6µm	ASTM D7647 >1300	<b>31</b>	▲ 4229	266
Particles >14µm	ASTM D7647 >160	<b>3</b>	73	12
Particles >21µm	ASTM D7647 >40	<b>2</b>	10	1
Particles >38µm	ASTM D7647 >10	<b>0</b>	1	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>14/12/9</b>	▲ 22/19/13	17/15/11

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.1	<b>0.045</b>	0.055




# OIL ANALYSIS REPORT

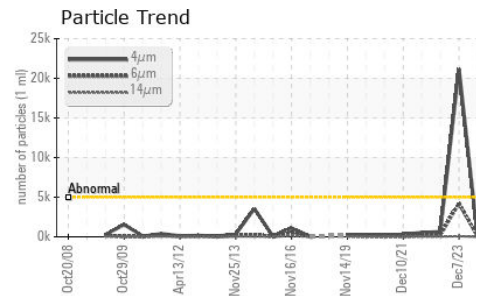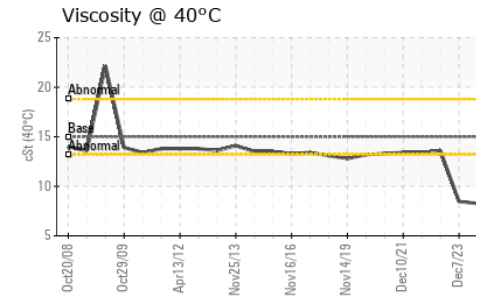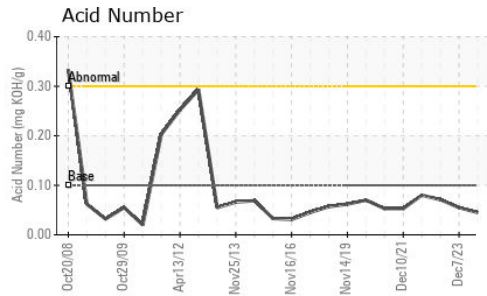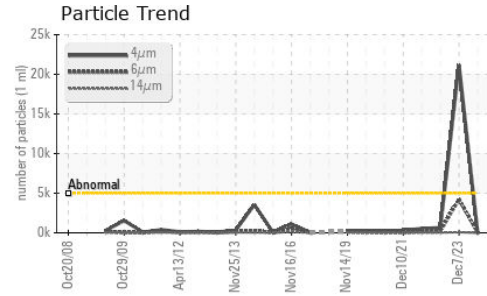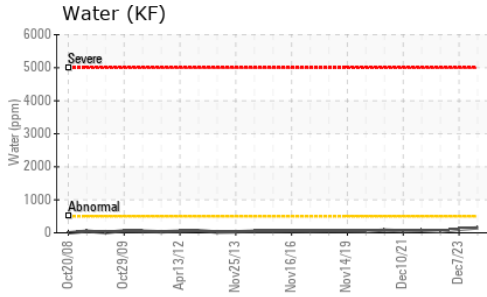






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	15.0	<b>8.26</b>	8.46	13.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

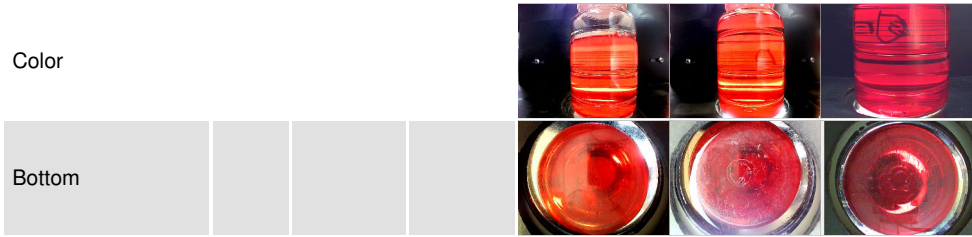

## GRAPHS

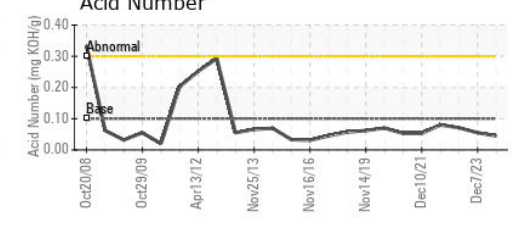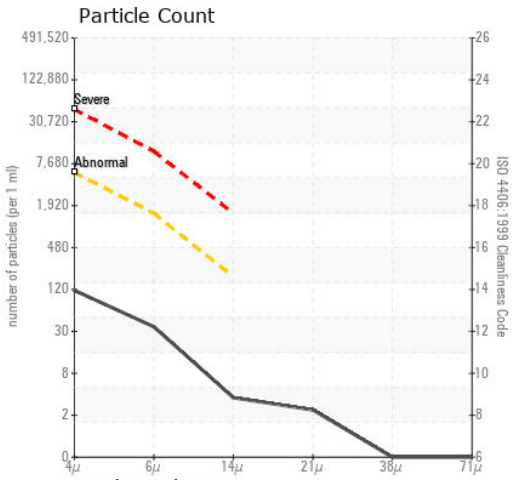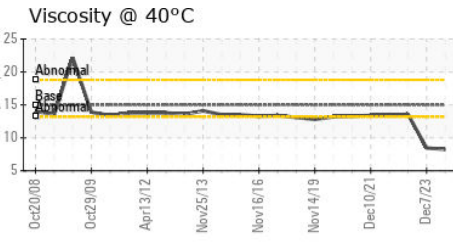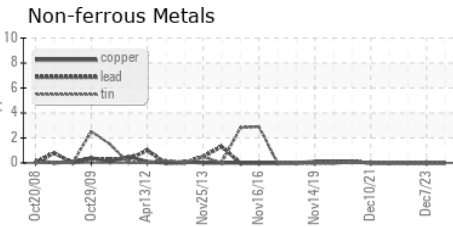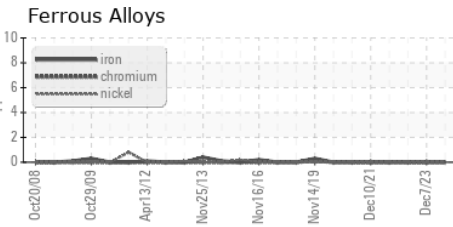

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : AN35267 **Received** : 17 Jun 2024  
**Lab Number** : **06213050** **Tested** : 20 Jun 2024  
**Unique Number** : 11085914 **Diagnosed** : 20 Jun 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**NABTESCO AEROSPACE INC**  
 12413 WILLOWS RD NE  
 KIRKLAND, WA  
 US 98034  
 Contact: SCOTT JACKSON  
 s.jackson@nabtescoaero.com  
 T: (425)602-8432  
 F: (425)602-8408

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)