


OIL ANALYSIS REPORT



Machine Id 2422 Component
Diesel Engine

ROYAL PURPLE MOTOR OIL 15W40 (--- QT

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

TS)			Apr2024	Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	VII (TIOI)		III III DAGC			motoryz
Sample Number		Client Info		WC0720119	WC0720075	
Sample Date Machine Age	mla	Client Info		06 Jun 2024	12 Apr 2024 76707	
	mls mls	Client Info		123236 100000	50000	
Oil Age Oil Changed	11115	Client Info		Changed	Not Changd	
Sample Status		Ciletit iiiio		ABNORMAL	ABNORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	86	50	
Chromium	ppm	ASTM D5185m	>20	7	6	
Nickel	ppm	ASTM D5185m	>4	<1	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m	>20	122	76	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	4 347	△ 358	
Tin	ppm	ASTM D5185m	>15	2	2	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	3	1	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	100	7	7	
Manganese	ppm	ASTM D5185m		2	1	
Magnesium	ppm	ASTM D5185m	60	104	86	
Calcium	ppm	ASTM D5185m	3050	2512	2413	
Phosphorus	ppm	ASTM D5185m	1050	946	911	
Zinc	ppm	ASTM D5185m	1200	1125	1084	
Sulfur	ppm	ASTM D5185m	12500	3096	2891	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	8	
Sodium	ppm	ASTM D5185m		6	2	
Potassium	ppm	ASTM D5185m	>20	261	157	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.1	0.6	
Nitration	Abs/cm	*ASTM D7624	>20	13.2	9.0	
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.7	21.8	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.0	16.8	
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	5.0	6.1	



OIL ANALYSIS REPORT

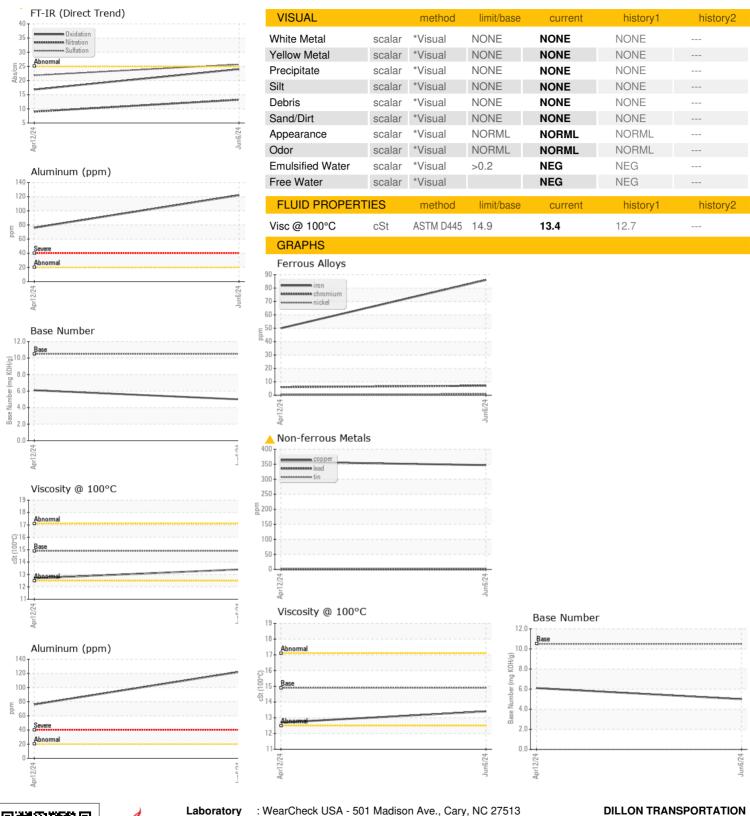





Certificate 12367

Sample No. Lab Number : 06213274 Unique Number : 11086138 Test Package : FLEET

: WC0720119

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received : 18 Jun 2024 **Tested** : 19 Jun 2024 Diagnosed

: 20 Jun 2024 - Sean Felton

974 TN WALTZ PARKWAY ASHLAND CITY, TN

US 37015 Contact: MASON NICHOLSON

M.NICHOLSON@DILLONTRANSPORTATION.COM T: (615)792-5099

F: (615)469-4200 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Report Id: DILASH [WUSCAR] 06213274 (Generated: 06/20/2024 14:29:01) Rev: 1

Contact/Location: MASON NICHOLSON - DILASH