




# OIL ANALYSIS REPORT

## Sample Rating Trend

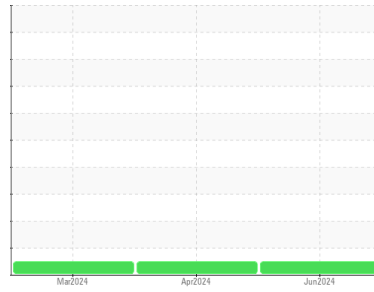

**NORMAL**



Machine Id

**2411**

Component

**Diesel Engine**

Fluid

**ROYAL PURPLE MOTOR OIL 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0720120</b>	WC0720069	WC0720080
Sample Date	Client Info		<b>07 Jun 2024</b>	26 Apr 2024	01 Mar 2024
Machine Age	mls	Client Info	<b>169031</b>	123764	69422
Oil Age	mls	Client Info	<b>0</b>	100000	44422
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>36</b>	91	52
Chromium	ppm	ASTM D5185m >20	<b>3</b>	8	5
Nickel	ppm	ASTM D5185m >4	<b>3</b>	4	2
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>18</b>	43	33
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>80</b>	391	413
Tin	ppm	ASTM D5185m >15	<b>1</b>	5	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>1</b>	7	6
Manganese	ppm	ASTM D5185m	<b>1</b>	2	1
Magnesium	ppm	ASTM D5185m 60	<b>23</b>	70	70
Calcium	ppm	ASTM D5185m 3050	<b>2616</b>	2651	2393
Phosphorus	ppm	ASTM D5185m 1050	<b>985</b>	1007	805
Zinc	ppm	ASTM D5185m 1200	<b>1164</b>	1174	941
Sulfur	ppm	ASTM D5185m 12500	<b>3730</b>	2901	2737

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	10	7
Sodium	ppm	ASTM D5185m	<b>3</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>41</b>	94	69

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	1.2	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	13.1	10.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	26.4	22.6

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.7</b>	23.9	17.8
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	<b>5.6</b>	5.4	6.0







# OIL ANALYSIS REPORT

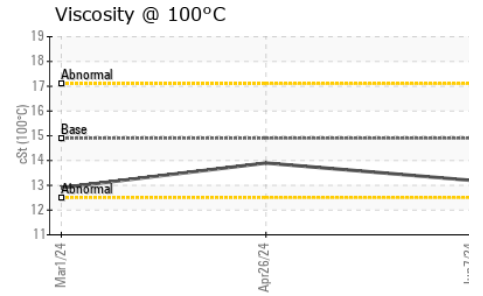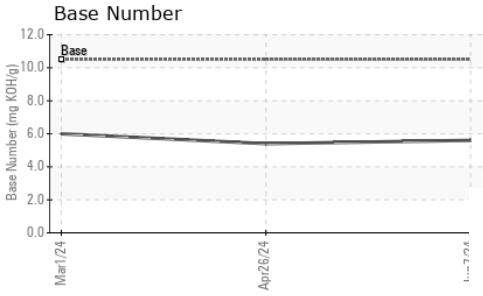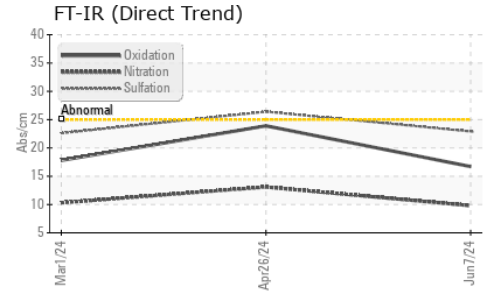

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.2	13.9

### GRAPHS

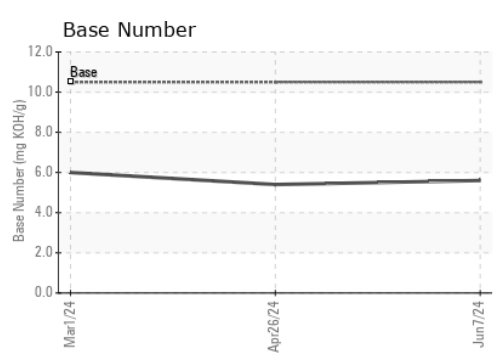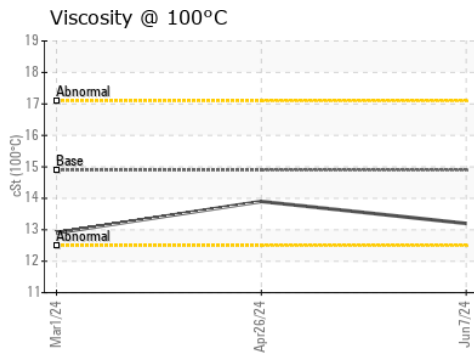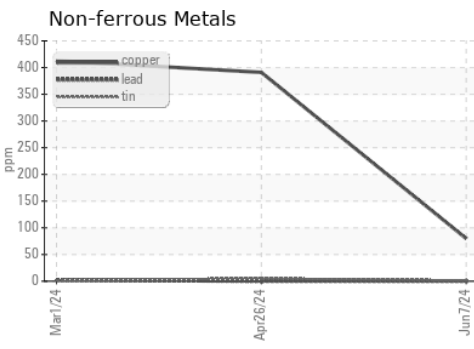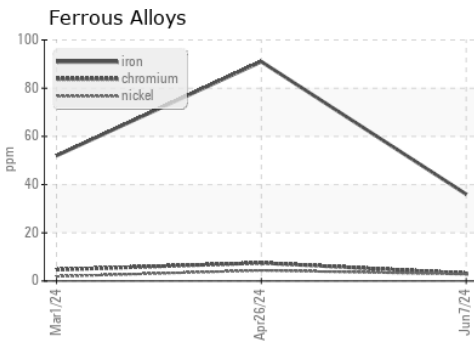

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0720120      **Received** : 18 Jun 2024  
**Lab Number** : 06213276      **Tested** : 19 Jun 2024  
**Unique Number** : 11086140      **Diagnosed** : 19 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**DILLON TRANSPORTATION**  
 974 TN WALTZ PARKWAY  
 ASHLAND CITY, TN  
 US 37015  
 Contact: MASON NICHOLSON  
 M.NICHOLSON@DILLONTRANSPORTATION.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)