


OIL ANALYSIS REPORT

Sample Rating Trend

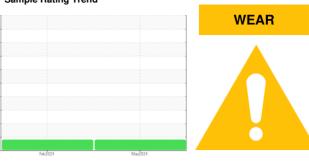

Machine Id 2405 Component

Diesel Engine

ROYAL PURPLE MOTOR OIL 15W40 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

rs)			Feb 2024	May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0720099	WC0720078	
Sample Date		Client Info		07 May 2024	26 Feb 2024	
Machine Age	mls	Client Info		129089	76043	
Oil Age	mls	Client Info		100000	50000	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	81	53	
Chromium	ppm	ASTM D5185m	>20	3	2	
Nickel	ppm	ASTM D5185m	>4	1	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	<1	0	
Aluminum	ppm	ASTM D5185m	>20	26	19	
Lead	ppm	ASTM D5185m	>40	0	4	
Copper	ppm	ASTM D5185m	>330	<u>418</u>	4 01	
Tin	ppm	ASTM D5185m	>15	3	1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	<1	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	100	7	8	
Manganese	ppm	ASTM D5185m		2	1	
Magnesium	ppm	ASTM D5185m	60	111	117	
Calcium	ppm	ASTM D5185m	3050	2599	2586	
Phosphorus	ppm	ASTM D5185m	1050	969	947	
Zinc	ppm	ASTM D5185m	1200	1173	1148	
Sulfur	ppm	ASTM D5185m	12500	3070	2912	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	6	
Sodium	ppm	ASTM D5185m		5	3	
Potassium	ppm	ASTM D5185m	>20	69	47	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.4	0.7	
Nitration	Abs/cm	*ASTM D7624	>20	15.5	9.9	
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.1	22.0	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.3	17.5	
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	5.3	5.8	



OIL ANALYSIS REPORT

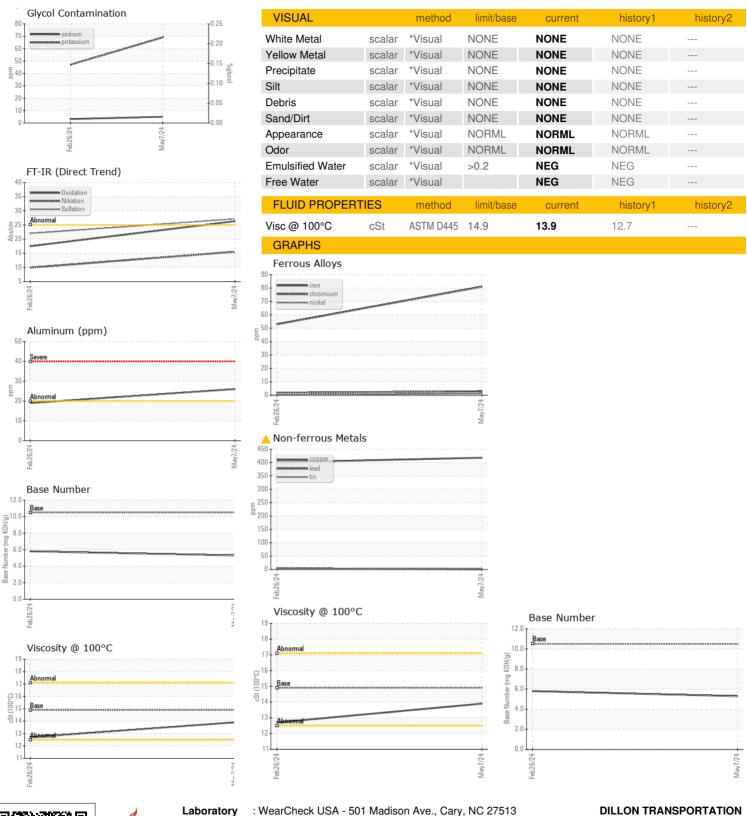





Certificate 12367

Laboratory Sample No. : WC0720099 Lab Number : 06213277 Unique Number : 11086141

Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 18 Jun 2024 **Tested** : 19 Jun 2024

Diagnosed : 20 Jun 2024 - Sean Felton

Contact: MASON NICHOLSON To discuss this sample report, contact Customer Service at 1-800-237-1369.

M.NICHOLSON@DILLONTRANSPORTATION.COM T: (615)792-5099

974 TN WALTZ PARKWAY

ASHLAND CITY, TN

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

F: (615)469-4200 Contact/Location: MASON NICHOLSON - DILASH

US 37015