




# OIL ANALYSIS REPORT

Sample Rating Trend

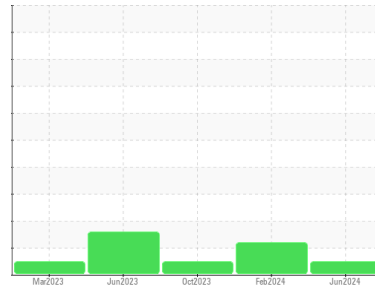

**NORMAL**



Machine Id

**2317**

Component

**Diesel Engine**

Fluid

**ROYAL PURPLE MOTOR OIL 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0720123</b>	WC0720052	WC0720162
Sample Date	Client Info		<b>01 Jun 2024</b>	03 Feb 2024	14 Oct 2023
Machine Age	mls	Client Info	<b>271281</b>	221081	171691
Oil Age	mls	Client Info	<b>0</b>	100000	50000
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>39</b>	93	50
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>10</b>	22	15
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>28</b>	88	75
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>1</b>	7	8
Manganese	ppm	ASTM D5185m	<b>1</b>	2	<1
Magnesium	ppm	ASTM D5185m 60	<b>34</b>	125	118
Calcium	ppm	ASTM D5185m 3050	<b>2572</b>	2703	2280
Phosphorus	ppm	ASTM D5185m 1050	<b>1014</b>	1046	840
Zinc	ppm	ASTM D5185m 1200	<b>1183</b>	1270	1101
Sulfur	ppm	ASTM D5185m 12500	<b>3824</b>	3240	2748

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	11	8
Sodium	ppm	ASTM D5185m	<b>4</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>24</b>	54	38

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.4</b>	2.3	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	17.1	10.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.5</b>	34.0	24.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.8</b>	32.4	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	<b>5.1</b>	▲ 2.9	5.0







# OIL ANALYSIS REPORT

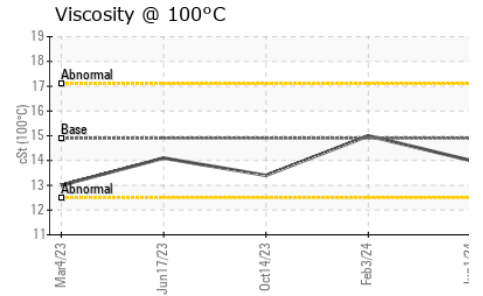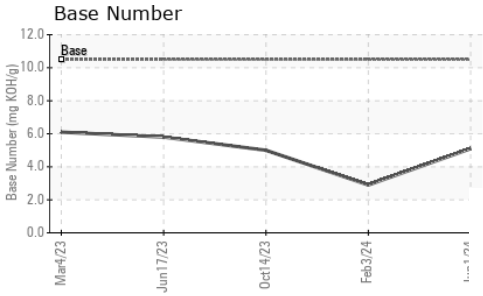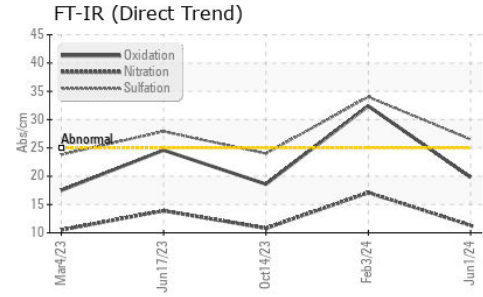

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	14.0	15.0

## GRAPHS

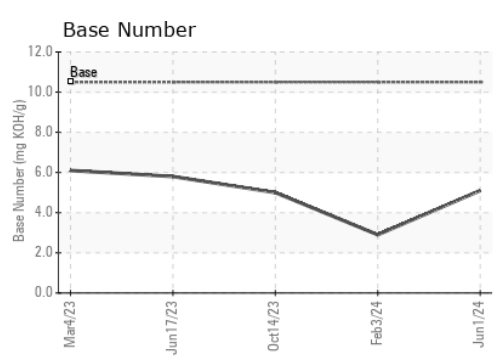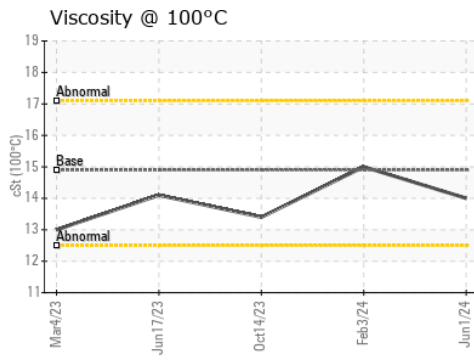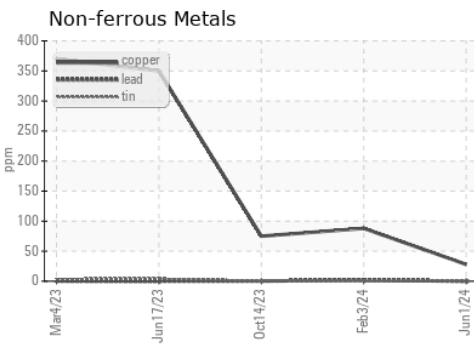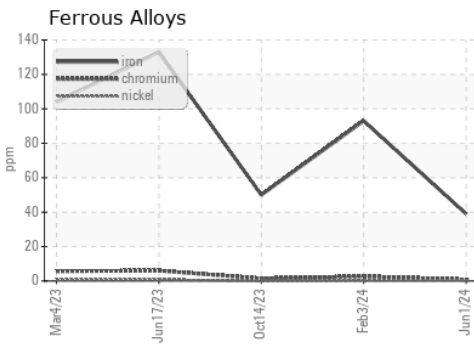

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0720123  
**Lab Number** : 06213293  
**Unique Number** : 11086157  
**Test Package** : FLEET  
**Received** : 18 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Wes Davis

**DILLON TRANSPORTATION**  
 974 TN WALTZ PARKWAY  
 ASHLAND CITY, TN  
 US 37015  
 Contact: MASON NICHOLSON  
 M.NICHOLSON@DILLONTRANSPORTATION.COM  
 T: (615)792-5099  
 F: (615)469-4200

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)