




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR D6 LGP 10039 (S/N KEW01125)
 Component
Hydraulic System
 Fluid
{not provided} (--- GAL)

Sample Rating Trend

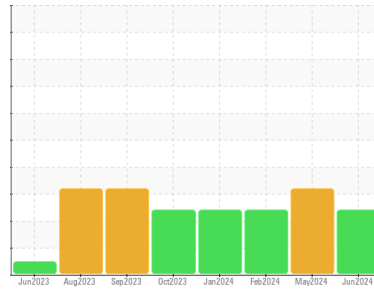

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal for time on oil.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0899194	WC0913082	WC0879302
Sample Date	Client Info		11 Jun 2024	07 May 2024	21 Feb 2024
Machine Age	hrs	Client Info	4157	3845	3376
Oil Age	hrs	Client Info	4157	3845	3376
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	41	36	31
Chromium	ppm	ASTM D5185m	>10	4	3	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		2	2	<1
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>10	29	28	24
Lead	ppm	ASTM D5185m	>10	3	3	2
Copper	ppm	ASTM D5185m	>75	20	19	18
Tin	ppm	ASTM D5185m	>10	1	1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		10	10	5
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		1	1	<1
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		12	12	5
Calcium	ppm	ASTM D5185m		492	527	339
Phosphorus	ppm	ASTM D5185m		683	848	731
Zinc	ppm	ASTM D5185m		952	1036	890
Sulfur	ppm	ASTM D5185m		1903	2317	1724

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	61	53	44
Sodium	ppm	ASTM D5185m		1	2	4
Potassium	ppm	ASTM D5185m	>20	6	6	2

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	1180	6087	3377
Particles >6µm	ASTM D7647	>1300	211	170	121
Particles >14µm	ASTM D7647	>160	22	7	10
Particles >21µm	ASTM D7647	>40	6	3	2
Particles >38µm	ASTM D7647	>10	0	0	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/12	20/15/10	19/14/10


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	0.84	0.85




OIL ANALYSIS REPORT


▲ Silicon (ppm)

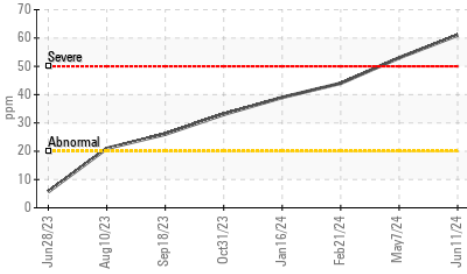


● Aluminum (ppm)

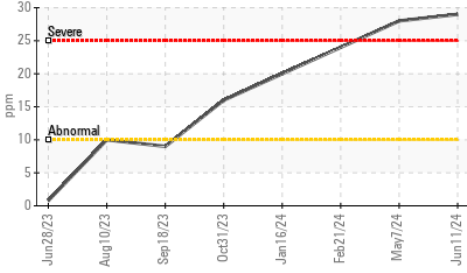


Particle Trend

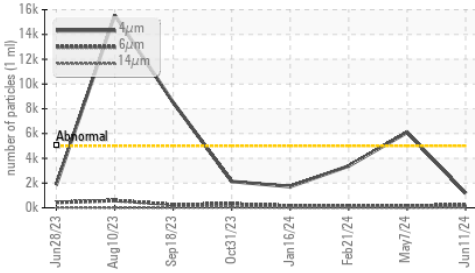

Acid Number

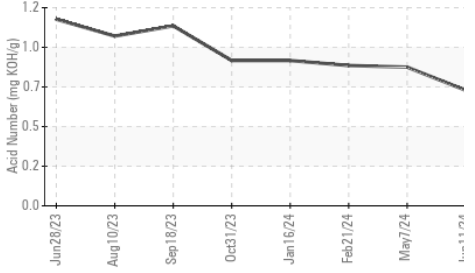

Viscosity @ 40°C

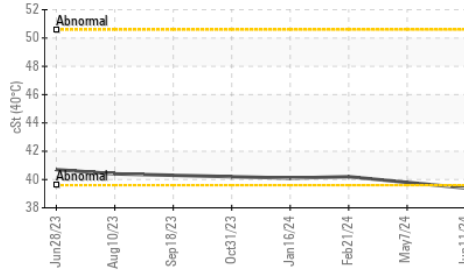

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	39.4	39.8	40.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

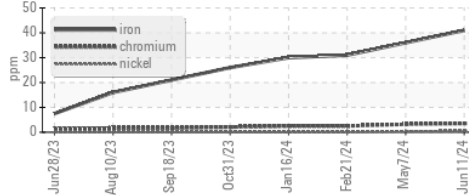


Non-ferrous Metals

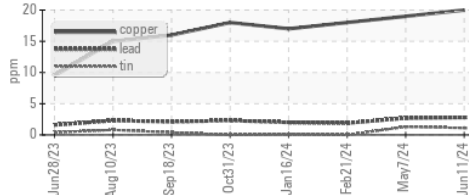


Viscosity @ 40°C

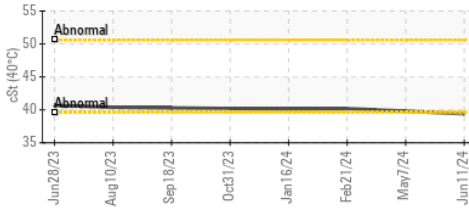

Particle Count

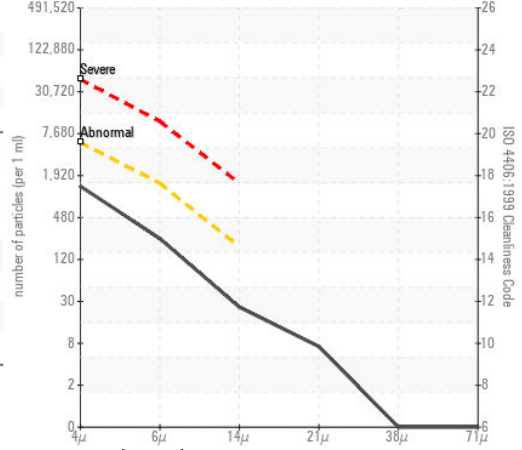

Acid Number

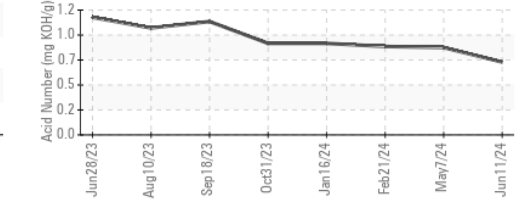

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0899194

Lab Number : 06213398

Unique Number : 11086262

Test Package : CONST

Received : 18 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 20 Jun 2024 - Don Baldrige

TRADER CONSTRUCTION CO.

PO DRAWER 1578

NEW BERN, NC

US 28563

Contact: MIKE WYATT

mwyatt@traderconstruction.com

T: (252)633-1399

F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)