

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

Machine Id

# **LINE 10 - SCOTT POWER PACK**

Component Hydraulic System

MOBIL DTE 10 EXCEL 68 (15 GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0955083	WC0893612	WC0838550	
Sample Date		Client Info		14 Jun 2024	26 Dec 2023	14 Jul 2023	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
CONTAMINATION		method	limit/base	current	history1	history2	
Water		WC Method	>0.05	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	8	5	6	
	ppm	ASTM D5185m	>20	<1	0	0	
	ppm	ASTM D5185m	>20	<1	0	0	
Titanium	ppm	ASTM D5185m		<1	0	0	
	ppm	ASTM D5185m		<1	0	0	
Aluminum	ppm	ASTM D5185m	>20	2	0	2	
	ppm	ASTM D5185m	>20	1	0	1	
Copper	ppm	ASTM D5185m	>20	4	3	2	
Tin	ppm	ASTM D5185m	>20	<1	0	<1	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		<1	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		<1	0	0	
Molybdenum	ppm	ASTM D5185m		<1	0	0	
Manganese	ppm	ASTM D5185m		<1	<1	0	
Magnesium	ppm	ASTM D5185m		1	0	1	
Calcium	ppm	ASTM D5185m		108	92	118	
Phosphorus	ppm	ASTM D5185m		427	427	465	
Zinc	ppm	ASTM D5185m		12	0	15	
Sulfur	ppm	ASTM D5185m		1598	1290	1843	
CONTAMINANTS		method	limit/base	current	history1	history2	
	ppm	ASTM D5185m	>15	1	<1	<1	
Sodium	ppm	ASTM D5185m		15	16	12	
Potassium	ppm	ASTM D5185m	>20	2	2	2	
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	732	414	788	
Particles >6µm		ASTM D7647	>1300	256	149	292	
Particles >14µm		ASTM D7647	>160	32	23	39	
Particles >21µm		ASTM D7647	>40	10	8	13	
Particles >38µm		ASTM D7647	>10	0	0	1	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	16/14/12	17/15/12	
FLUID DEGRADA	ΓΙΟΝ	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.70	0.69	0.60	
3:18:52) Rev: 1	0 - 0		Contact/Location: DALE HARRISON - CONSTR				


Contact/Location: DALE HARRISON - CONSTR Page 1 of 2




# **OIL ANALYSIS REPORT**

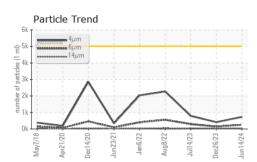


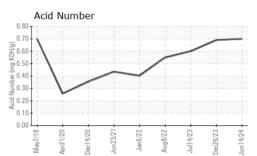





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.4	61.0	60.9	61.5
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom						

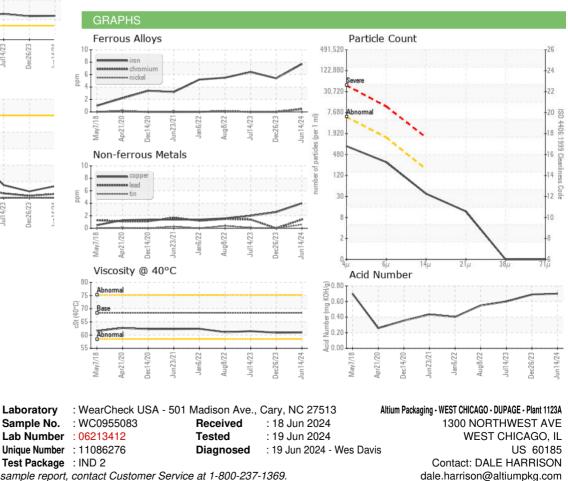

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONSTR [WUSCAR] 06213412 (Generated: 06/21/2024 18:18:53) Rev: 1

Certificate 12367

Contact/Location: DALE HARRISON - CONSTR

Page 2 of 2

T: x:

F: x: