




OIL ANALYSIS REPORT

Sample Rating Trend

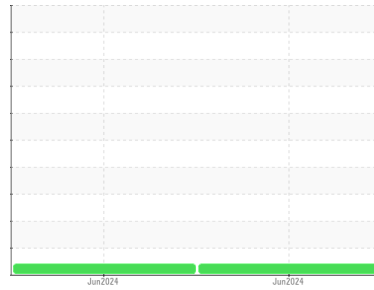

VISCOSITY



Area

[AFTER FILTRATION]

Machine Id
482004.02

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0014373	KL0014372	---
Sample Date	Client Info			07 Jun 2024	06 Jun 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			Not Changed	Not Changed	---
Sample Status				ATTENTION	ATTENTION	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	11	11	---
Chromium	ppm	ASTM D5185m	>20	2	2	---
Nickel	ppm	ASTM D5185m	>20	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>20	<1	<1	---
Copper	ppm	ASTM D5185m	>20	6	6	---
Tin	ppm	ASTM D5185m	>20	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		<1	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	---
Barium	ppm	ASTM D5185m	5	0	<1	---
Molybdenum	ppm	ASTM D5185m	5	<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	25	3	5	---
Calcium	ppm	ASTM D5185m	200	19	20	---
Phosphorus	ppm	ASTM D5185m	300	207	211	---
Zinc	ppm	ASTM D5185m	370	272	272	---
Sulfur	ppm	ASTM D5185m	2500	1497	1563	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	2	---
Sodium	ppm	ASTM D5185m		0	0	---
Potassium	ppm	ASTM D5185m	>20	1	1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		162	360	---
Particles >6µm		ASTM D7647	>1300	46	114	---
Particles >14µm		ASTM D7647	>160	4	12	---
Particles >21µm		ASTM D7647	>40	1	4	---
Particles >38µm		ASTM D7647	>10	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>17/14	13/9	14/11	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.27	0.26	---



OIL ANALYSIS REPORT









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	● 35.9	● 36.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

GRAPHS

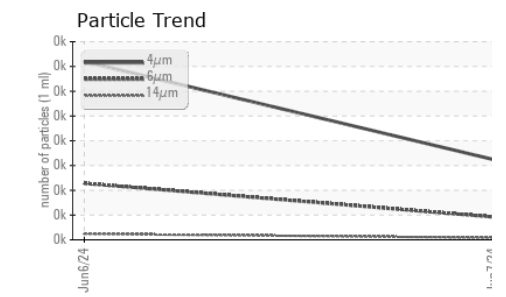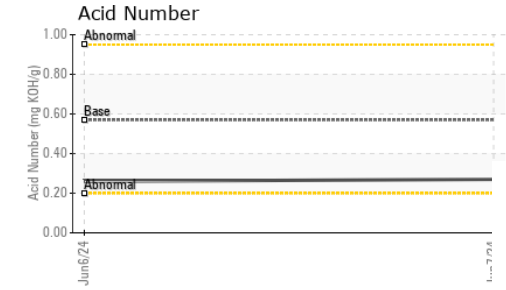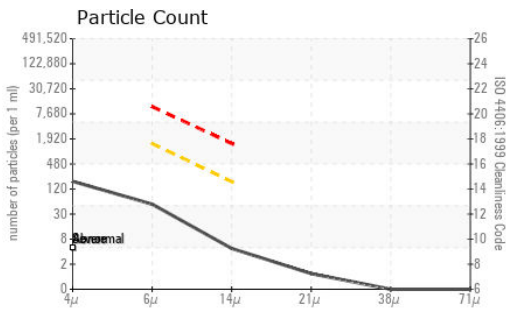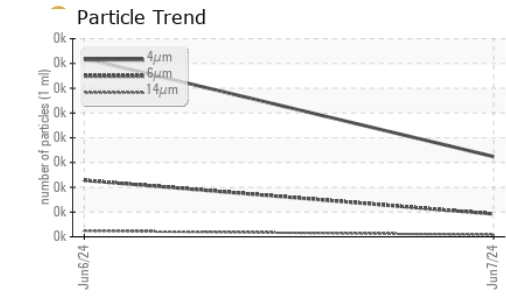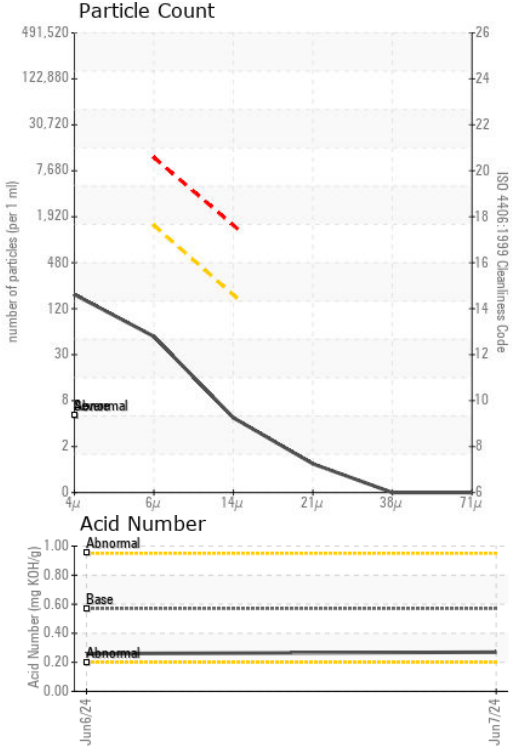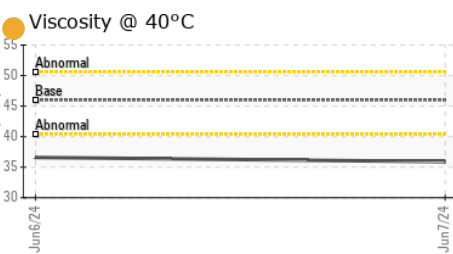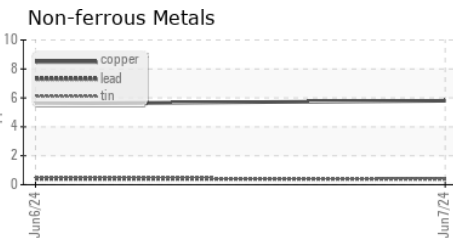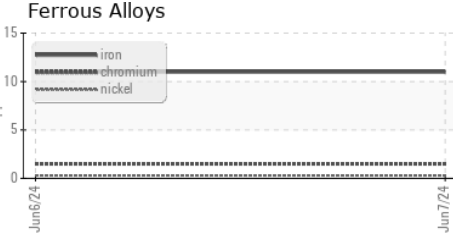

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014373 **Received** : 18 Jun 2024
Lab Number : 06213428 **Tested** : 19 Jun 2024
Unique Number : 11086292 **Diagnosed** : 20 Jun 2024 - Don Baldrige
Test Package : MOB 2

PV FLUID PRODUCTS
 11901 CUTTEN RD
 HOUSTON, TX
 US 77066
 Contact: PAT HARRAH
 PAT.HARRAH@PVFLUID.COM
 T: (281)620-2085
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)