


OIL ANALYSIS REPORT

Sample Rating Trend

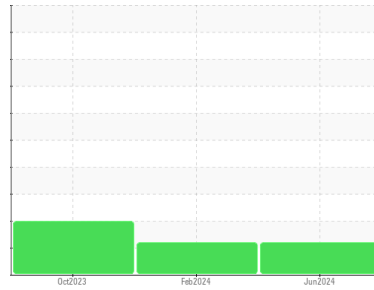

Machine Id
KOMATSU Wa600 (S/N 60135)
 Component
Hydraulic System
 Fluid
TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (--- GAL)

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO10002110	TO10003148	TO10002723
Sample Date	Client Info	13 Jun 2024	20 Feb 2024	18 Oct 2023
Machine Age	hrs	22846	22323	21834
Oil Age	hrs	523	1568	1079
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	23	22	17
Chromium ppm	ASTM D5185m >20	<1	<1	<1
Nickel ppm	ASTM D5185m >20	<1	0	<1
Titanium ppm	ASTM D5185m	<1	0	<1
Silver ppm	ASTM D5185m	<1	0	0
Aluminum ppm	ASTM D5185m >20	2	2	2
Lead ppm	ASTM D5185m >20	<1	0	<1
Copper ppm	ASTM D5185m >20	10	9	6
Tin ppm	ASTM D5185m >20	<1	0	<1
Vanadium ppm	ASTM D5185m	0	0	0
Cadmium ppm	ASTM D5185m	<1	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	0	0
Barium ppm	ASTM D5185m	<1	8	9
Molybdenum ppm	ASTM D5185m	<1	0	<1
Manganese ppm	ASTM D5185m	<1	0	0
Magnesium ppm	ASTM D5185m	158	145	155
Calcium ppm	ASTM D5185m	185	201	184
Phosphorus ppm	ASTM D5185m	692	719	702
Zinc ppm	ASTM D5185m	947	870	963
Sulfur ppm	ASTM D5185m	3020	2883	3107

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	7	5	4
Sodium ppm	ASTM D5185m	2	0	0
Potassium ppm	ASTM D5185m >20	2	2	2
Water %	ASTM D6304 >0.05	NEG	NEG	NEG






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 80713	▲ 114275	▲ 122762
Particles >6µm	ASTM D7647 >1300	▲ 6910	▲ 13382	▲ 19849
Particles >14µm	ASTM D7647 >160	57	152	▲ 283
Particles >21µm	ASTM D7647 >40	12	37	▲ 49
Particles >38µm	ASTM D7647 >10	0	1	1
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 24/20/13	▲ 24/21/14	▲ 24/21/15

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	0.88	1.01	0.72


OIL ANALYSIS REPORT

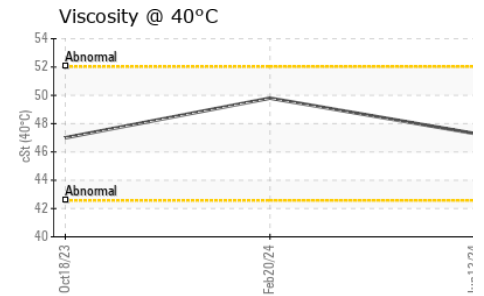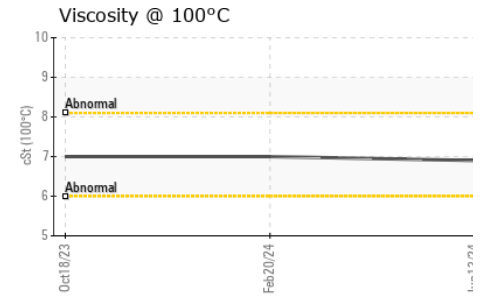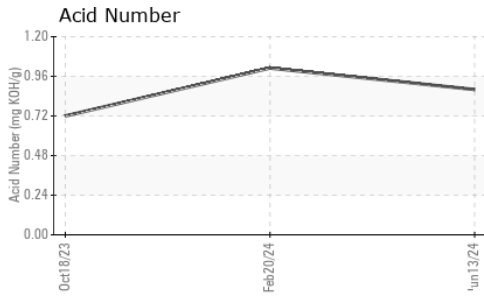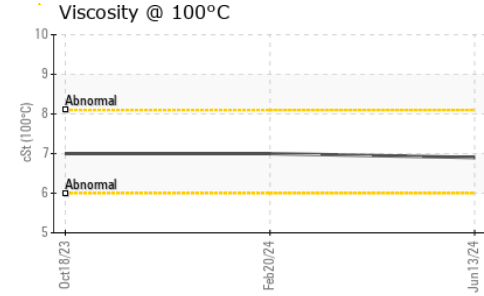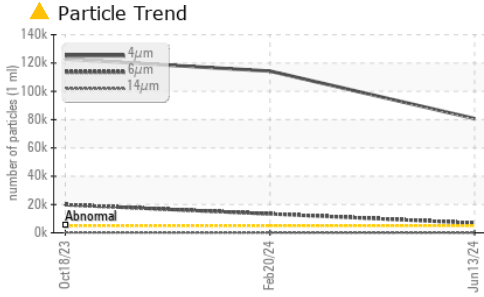






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.3	49.8	47.0
Visc @ 100°C	cSt	ASTM D445	6.9	7	7
Viscosity Index (VI)	Scale	ASTM D2270	100	95	105

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

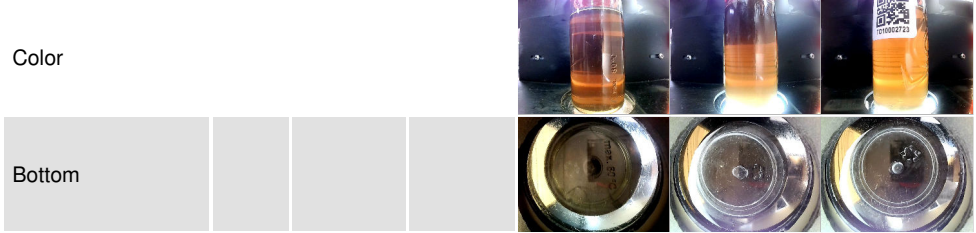

GRAPHS

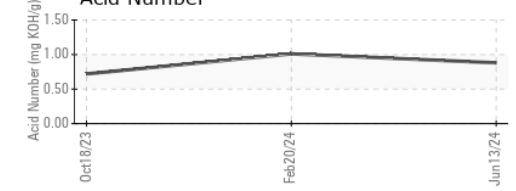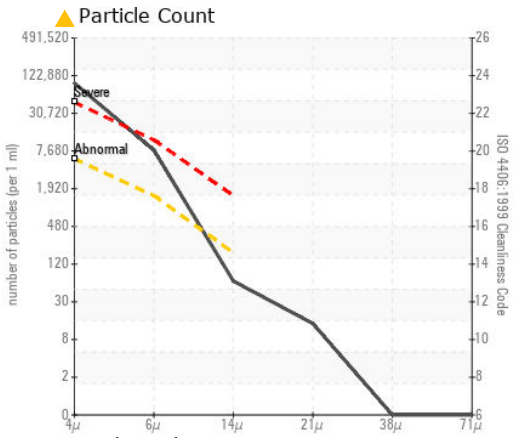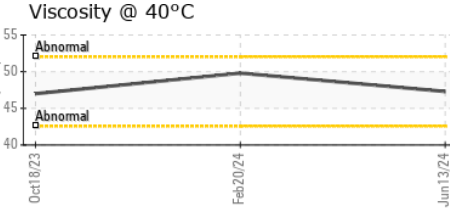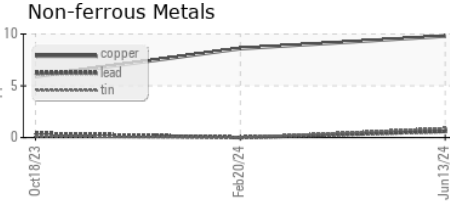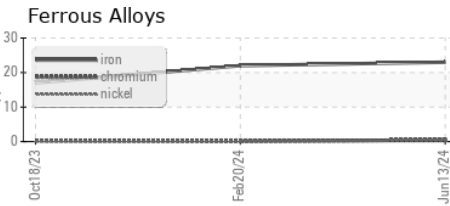

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002110 **Received** : 18 Jun 2024
Lab Number : 06213455 **Tested** : 20 Jun 2024
Unique Number : 11086319 **Diagnosed** : 20 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: MIKE SNYDER
 msnyder@anchorstoneco.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (417)850-9635

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: