

OIL ANALYSIS REPORT



Machine Id

7196040 (S/N 1543)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018244		
Sample Date		Client Info		24 May 2024		
Machine Age	hrs	Client Info		18634		
Oil Age	hrs	Client Info		3000		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm		>10	2		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m		5		
Tin	ppm	ASTM D5185m	>10	۲ ۲		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		۰ <1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	26		
Molybdenum	ppm	ASTM D5185m		20 <1		
	ppm		0	<1		
Manganese	ppm	ASTM D5185m	100			
Magnesium	ppm	ASTM D5185m	100	32		
Calcium	ppm		0	0		
Phosphorus	ppm	ASTM D5185m	0	11		
Zinc	ppm		0	16		
Sulfur	ppm	ASTM D5185m	23500	16401		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.021		
ppm Water	ppm	ASTM D6304	>500	214		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		14609		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	A 345		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	1/20/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34		



Built for a lifetime

OIL ANALYSIS REPORT

limit/base

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

491,52

122,880 30 720 7,680

1,920

480

120

30

(B/H0) MOX 0.96

Ê 0.72

- e 0.48

0.00

Acid Ni 0.24

(per 1 ml) May24/24

May24/24

Mav24/24

>0.05

current

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

current

current

Particle Count

Acid Number

NEG

NEG

48.5

history1

history

history1

no image

no image

history2

history

history2


no image

no imade

4406

:1999 Cle

14

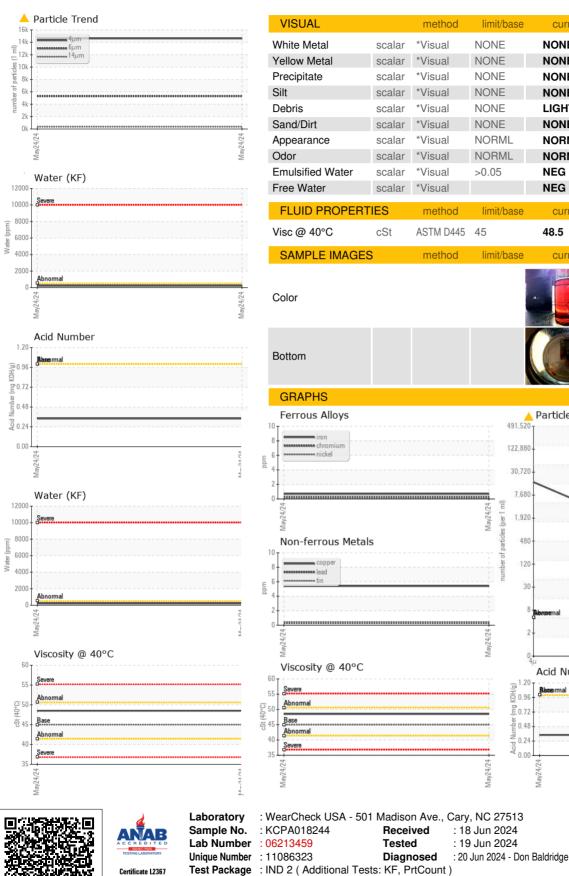

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - FOXELC

214

28

FOX RACING SHOX 750 VERNON WAY

EL CAJON, CA

US 92021

Contact:

T:

F:

Page 2 of 2

^{* -} Denotes test methods that are outside of the ISO 17025 scope of accreditation.