

## **OIL ANALYSIS REPORT**

Machine Id KAESER AIRCENTER SK 15 4418110 (S/N 1201) Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

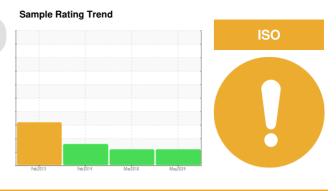

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018152	KC57061	KC37461
Sample Date		Client Info		24 May 2024	01 Mar 2016	19 Feb 2014
Machine Age	hrs	Client Info		42780	9360	3111
Oil Age	hrs	Client Info		3000	2800	2470
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m		4	4	1
Tin	ppm	ASTM D5185m	>10	<1	3	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	27	1	7
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	34	58	77
Calcium	ppm	ASTM D5185m		0	1	1
Phosphorus	ppm	ASTM D5185m	0	10	0	3
Zinc	ppm	ASTM D5185m		15	8	5
Sulfur	ppm	ASTM D5185m	23500	17659	18863	18303
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	2
Sodium	ppm	ASTM D5185m		13	18	15
Potassium	ppm	ASTM D5185m		4	2	4
Water	%	ASTM D6304		0.021	0.021	0.019
ppm Water	ppm	ASTM D6304		211	210	190
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7252	1589	2718
Particles >6µm		ASTM D7647		<u> </u>	866	<u>▲</u> 1480
Particles >14µm		ASTM D7647	>80	<b>109</b>	147	▲ 252
Particles >21µm		ASTM D7647		14	49	▲ 85
Particles >38µm		ASTM D7647	>4	0	7	<b>▲</b> 13
Particles >71µm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>20/18/14</b>	17/14	▲ 18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.35	0.405 Contact/Location	0.419

Report Id: FOXELC [WUSCAR] 06213461 (Generated: 06/21/2024 17:44:19) Rev: 1


Contact/Location: ? ? - FOXELC

Page 1 of 2



muu

# **OIL ANALYSIS REPORT**

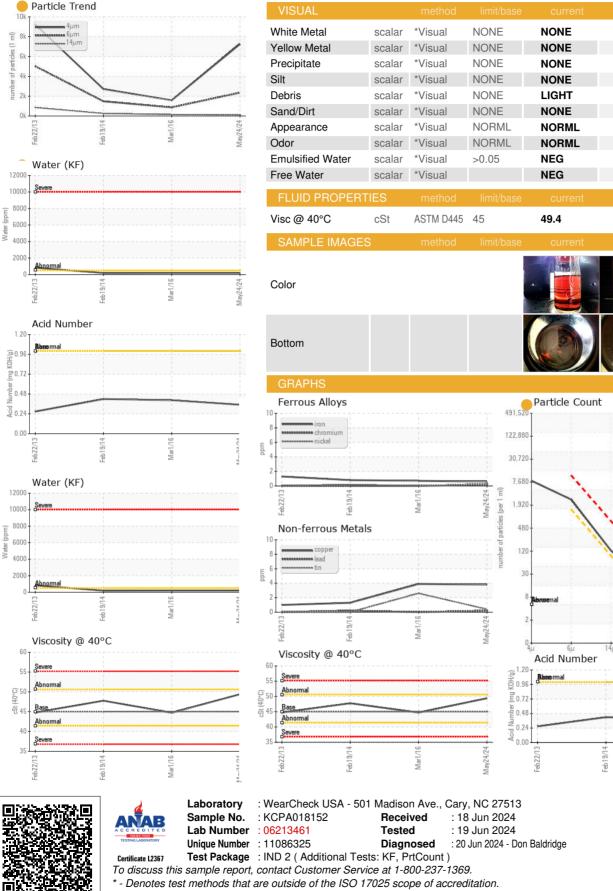

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: FOXELC [WUSCAR] 06213461 (Generated: 06/21/2024 17:44:19) Rev: 1

Contact/Location: ? ? - FOXELC Page 2 of 2

Mar1/16

214

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

44.72

LIGHT

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

47.76

no image

no image

4406

:1999 Cle

14

750 VERNON WAY EL CAJON, CA US 92021

FOX RACING SHOX

T: F:

Contact: