




OIL ANALYSIS REPORT

Sample Rating Trend

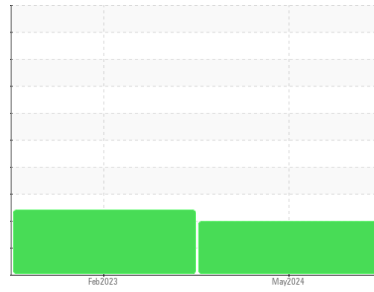

ISO



Machine Id

KAESER 7188704

Component

Compressor

Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KCPA018014	KCP54277	---
Sample Date	Client Info	23 May 2024	28 Feb 2023	---
Machine Age	hrs	Client Info	9913	8100
Oil Age	hrs	Client Info	3000	8100
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<1	0
Chromium	ppm	ASTM D5185m >10	<1	0
Nickel	ppm	ASTM D5185m >3	<1	0
Titanium	ppm	ASTM D5185m >3	<1	0
Silver	ppm	ASTM D5185m >2	<1	0
Aluminum	ppm	ASTM D5185m >10	2	<1
Lead	ppm	ASTM D5185m >10	<1	0
Copper	ppm	ASTM D5185m >50	19	6
Tin	ppm	ASTM D5185m >10	<1	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0
Barium	ppm	ASTM D5185m 90	14	50
Molybdenum	ppm	ASTM D5185m 0	<1	0
Manganese	ppm	ASTM D5185m	<1	0
Magnesium	ppm	ASTM D5185m 100	18	51
Calcium	ppm	ASTM D5185m 0	0	2
Phosphorus	ppm	ASTM D5185m 0	1	2
Zinc	ppm	ASTM D5185m 0	29	11
Sulfur	ppm	ASTM D5185m 23500	19615	20419

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	2	<1
Sodium	ppm	ASTM D5185m	<1	2
Potassium	ppm	ASTM D5185m >20	1	0
Water	%	ASTM D6304 >0.05	0.009	0.023
ppm Water	ppm	ASTM D6304 >500	95	235.4






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	39581	78917	---
Particles >6µm	ASTM D7647 >1300	▲ 15324	▲ 46009	---
Particles >14µm	ASTM D7647 >80	▲ 1182	▲ 9378	---
Particles >21µm	ASTM D7647 >20	▲ 184	▲ 2687	---
Particles >38µm	ASTM D7647 >4	▲ 5	▲ 210	---
Particles >71µm	ASTM D7647 >3	▲ 1	▲ 5	---
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 22/21/17	▲ 23/23/20	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.34	0.37


OIL ANALYSIS REPORT

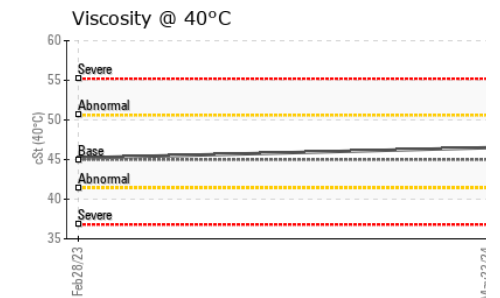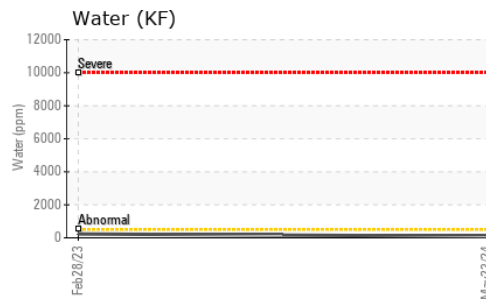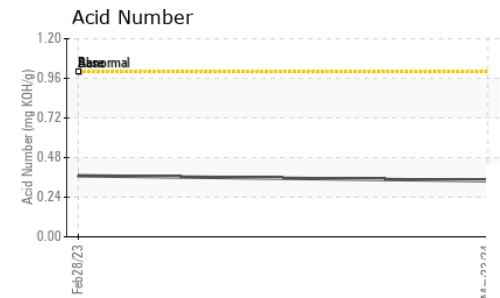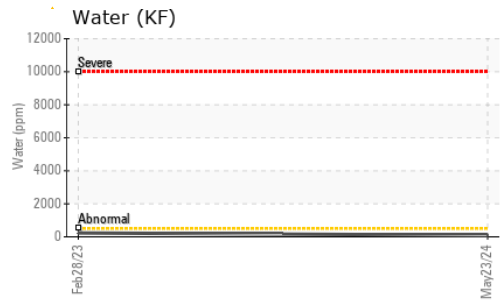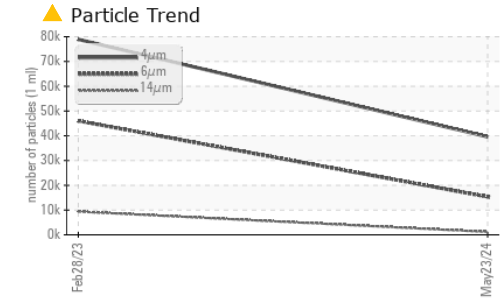






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.5	45.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

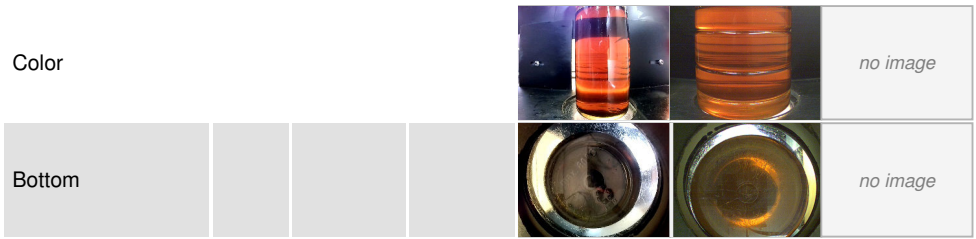

GRAPHS

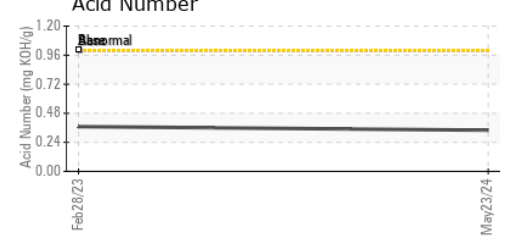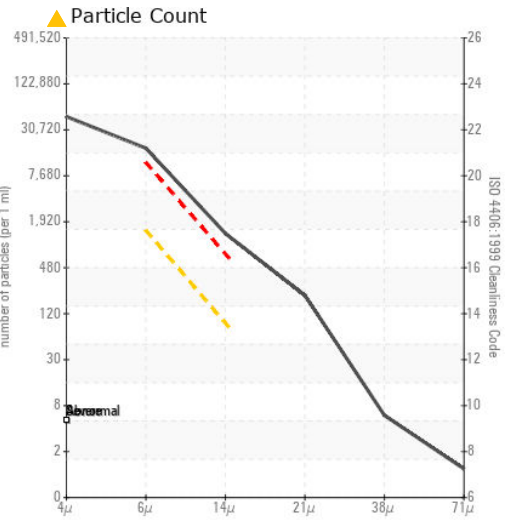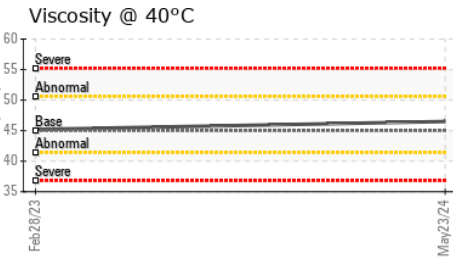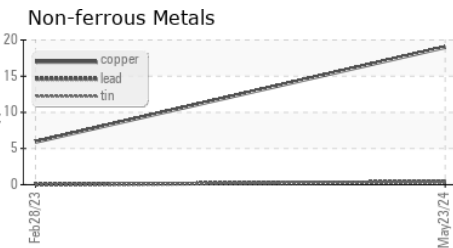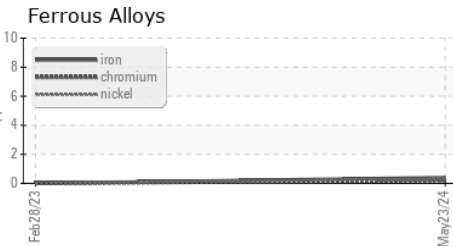

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA018014
Lab Number : 06213471
Unique Number : 11086335
Test Package : IND 2 (Additional Tests: KF, PrtCount)
Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 20 Jun 2024 - Don Baldrige

PENSKE TRUCK LEASING
 8710 VIA DE LA FUENTE
 SAN DIEGO, CA
 US 92154
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)