


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

5310603 (S/N 1036) Component Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Ma	2023	Jan2024 Jun202	4	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018440	KCPA009915	KCP53950
Sample Date		Client Info		12 Jun 2024	05 Jan 2024	19 May 2023
Machine Age	hrs	Client Info		39769	37862	34978
Oil Age	hrs	Client Info		0	0	3000
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	0	1
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m	>50	9	6	10
Tin	ppm	ASTM D5185m	>10	<1	2	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	3	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	2	16	13
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	0	0
Zinc	ppm	ASTM D5185m	0	23	25	28
Sulfur	ppm	ASTM D5185m	23500	18991	17820	21280
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		0	5	2
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water	%	ASTM D6304	>0.05	0.008	0.016	0.007
ppm Water	ppm	ASTM D6304	>500	89	163	72.3
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1531	9559	7498
Particles >6µm		ASTM D7647	>1300	329	<u>\$\text{2855}\$</u>	<u>^</u> 2276
Particles >14µm		ASTM D7647	>80	13	<u>170</u>	<u></u> 168
Particles >21µm		ASTM D7647	>20	2	3 6	▲ 38
Particles >38µm		ASTM D7647	>4	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/11	<u>^</u> 20/19/15	<u>^</u> 20/18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.43	0.41	0.45



OIL ANALYSIS REPORT

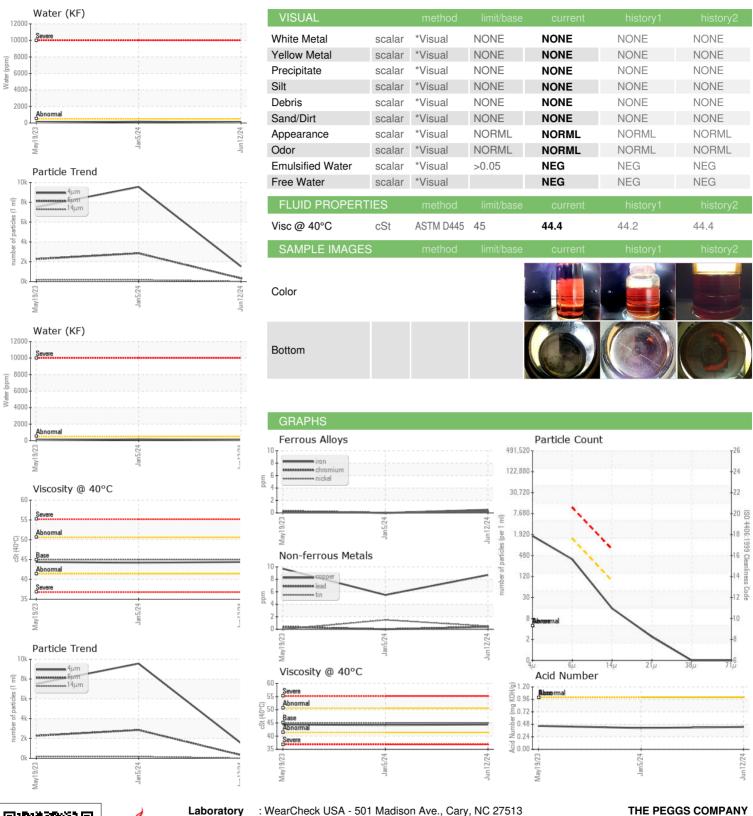





Certificate 12367

Sample No. Lab Number

: KCPA018440 : 06213477

Unique Number : 11086341

Received : 18 Jun 2024 **Tested** Diagnosed Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 19 Jun 2024 : 20 Jun 2024 - Don Baldridge

4851 FELSPAR ST RIVERSIDE, CA US 92509

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PEGRIV [WUSCAR] 06213477 (Generated: 06/21/2024 17:47:24) Rev: 1

Contact/Location: Service Manager - PEGRIV

T:

F: