




OIL ANALYSIS REPORT

Sample Rating Trend

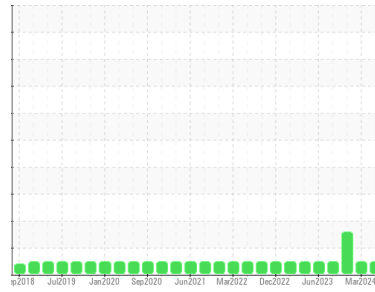

NORMAL



Machine Id
ATLAS COPCO ATLAS 2 GA75 (S/N API678864)
 Component
Air Compressor
 Fluid
USPI AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USPM37767	USPM27673	USPM27670
Sample Date	Client Info	10 Jun 2024	06 Mar 2024	04 Dec 2023
Machine Age	hrs	Client Info	0	15769
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	MARGINAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >70	1	0	0
Chromium	ppm	ASTM D5185m >15	<1	<1	0
Nickel	ppm	ASTM D5185m >6	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >10	2	<1	0
Lead	ppm	ASTM D5185m >20	<1	0	0
Copper	ppm	ASTM D5185m >80	<1	0	1
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 0	<1	<1	0
Molybdenum	ppm	ASTM D5185m 0	<1	0	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	2	0	<1
Calcium	ppm	ASTM D5185m 0	0	1	1
Phosphorus	ppm	ASTM D5185m 1	15	2	2
Zinc	ppm	ASTM D5185m 0	3	<1	0
Sulfur	ppm	ASTM D5185m 0	219	36	15

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >12	14	14	▲ 13
Sodium	ppm	ASTM D5185m	0	<1	2
Potassium	ppm	ASTM D5185m >20	2	1	2
Water	%	ASTM D6304 >0.2	0.062	0.020	0.035
ppm Water	ppm	ASTM D6304 >2000	627	204	357

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	419	372	972
Particles >6µm	ASTM D7647 >2500	157	96	247
Particles >14µm	ASTM D7647 >320	11	11	15
Particles >21µm	ASTM D7647 >80	3	2	4
Particles >38µm	ASTM D7647 >20	0	0	1
Particles >71µm	ASTM D7647 >4	0	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/15	16/14/11	16/14/11	17/15/11

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.05	0.14	0.10	0.09




OIL ANALYSIS REPORT

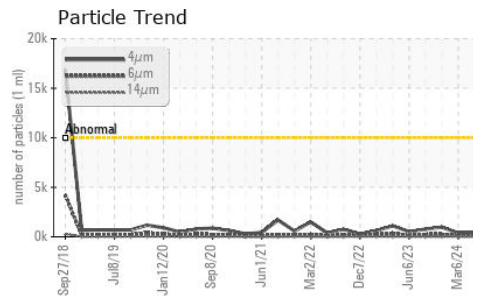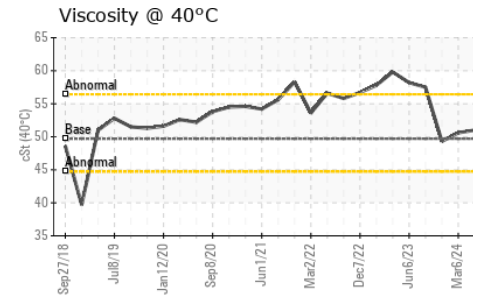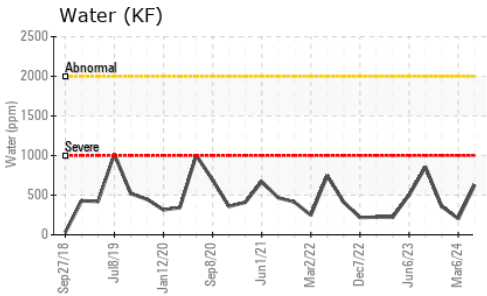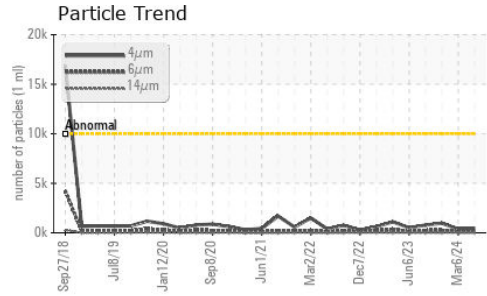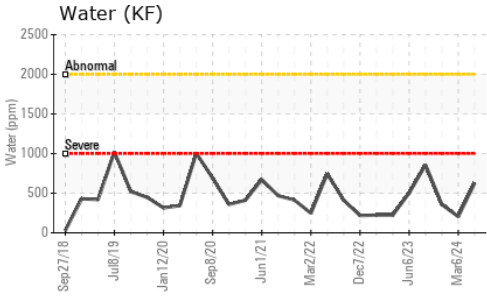






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.7	51.0	50.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

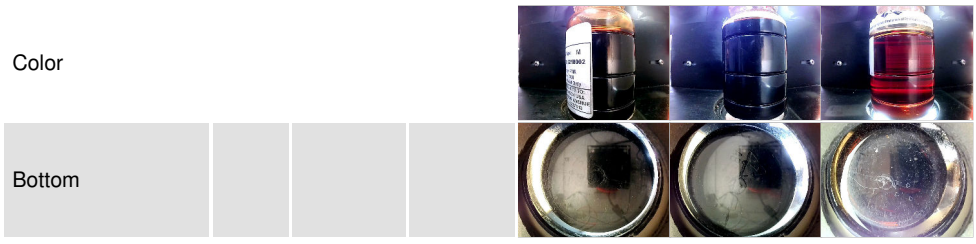

GRAPHS

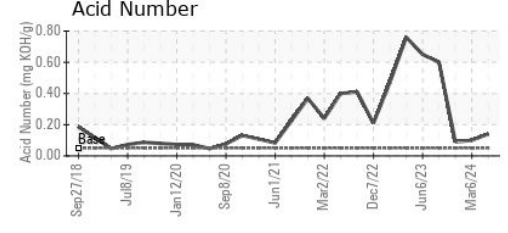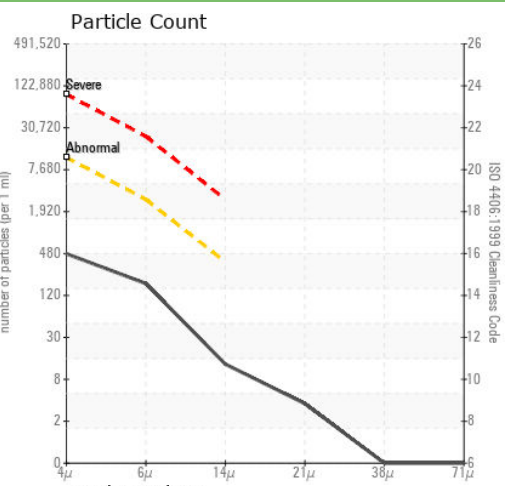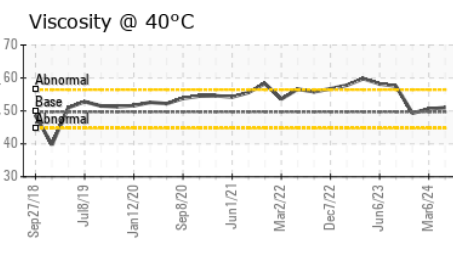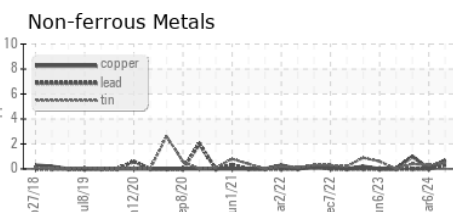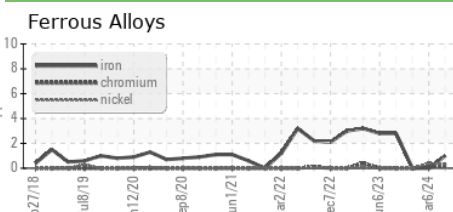

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM37767
Lab Number : 06213493
Unique Number : 11086357
Test Package : IND 2
Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 21 Jun 2024 - Jonathan Hester

Cargill Camrose Oilseed
 20033 Twp Road 464
 Camrose, AB
 CA T4V 4E7
 Contact: Daniel Woodford
 daniel_woodford@cargill.com
 T: 1(780)608-6374
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)