


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

FRICK LSC2 Component Refrigeration Compressor Fluid CAMCO 717 HT (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0013226	USP0005181	USP248406
Sample Date		Client Info		13 Jun 2024	07 Jan 2024	05 Jun 2023
Machine Age	hrs	Client Info		84216	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<1	<1	<1
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>3	2	0	0
Lead	ppm	ASTM D5185m	>2	= <1	<1	0
Copper	ppm	ASTM D5185m	>8	<1	<1	0
Tin		ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m	24	0	0	0
Cadmium	ppm			۰ <1	<1	0
Caumium	ppm	ASTM D5185m		<1	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m		<1	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	0	6
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.01	0.001	0.005	0.002
ppm Water	ppm	ASTM D6304	>100	2	56	20.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1488	6448	7704
Particles >6µm		ASTM D7647	>2500	308	1206	1431
Particles >14µm		ASTM D7647	>320	12	71	64
Particles >21µm		ASTM D7647	>80	2	15	13
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/11	20/17/13	20/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
					· · · · · · · · · · · · · · · · · · ·	, , , , , , , , , , , , , , , , , , ,
Acid Number (AN)	mg KOH/g	ASTM D974	0.007	0.015	0.014	0.014


Contact/Location: Service Manager - CENMAD Page 1 of 2



OIL ANALYSIS REPORT






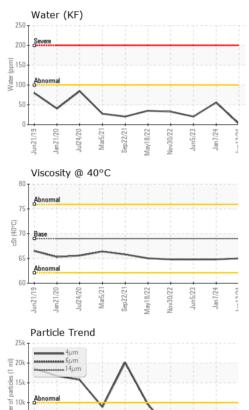

dmin

5

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69	65.0	64.8	64.8
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						
Bottom						

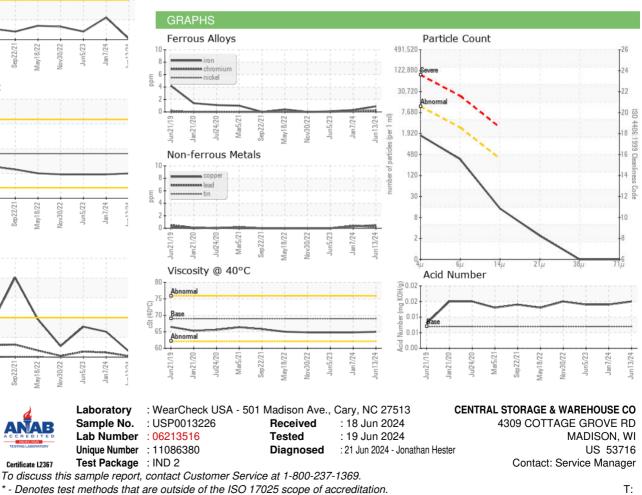

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CENMAD [WUSCAR] 06213516 (Generated: 06/23/2024 03:42:12) Rev: 1

Contact/Location: Service Manager - CENMAD Page 2 of 2