

OIL ANALYSIS REPORT

PAO PRESSURE DROP TEST SET A 0954863

Component Hydraulic System Fluid

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Discrete particle counts [100 ml] $5-15\mu$ m = 11200, 15-25 μ m = 1600, 25-50 μ m = 600, 50-100 μ m = 0, >100 μ m = 0. There is a moderate amount of particulates present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0954863		
Sample Date		Client Info		18 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m		0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		<1		
Sulfur	ppm	ASTM D5185m		23		
CONTAMINANT		method	limit/base	-	history1	history2
Silicon	ppm	ASTM D5185m	>15	5		
Sodium	ppm	ASTM D5185m	00	<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304		0.001		
ppm Water	ppm	ASTM D6304	>500	15		
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	100	298		
Particles >6µm		ASTM D7647		134		
Particles >14µm		ASTM D7647	>20	22		
Particles >21µm		ASTM D7647		6		
Particles >38µm		ASTM D7647	>3	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/14/11	15/14/12		
FLUID DEGRAD		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.543		

Contact/Location: MIKE STEVENSON - TAGBAL Page 1 of 2

Sample Rating Trend





OIL ANALYSIS REPORT

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

5.28

Particle Count

Acid Number

491,5

122,880

30.720 7,680

1,920

480

120

30

(^{0.60}) (⁰/HO)

Ē 0.36

· 문 0.24

Acid

Jun18/24

0.12

0.00

Jun18/24 (per 1 ml)

es les

no image

no image

no image

no image

18 18

14

:1999 Cle

NONE

NONE

NONE

NONE


NONE

NONE

NORML

NORML

>0.05

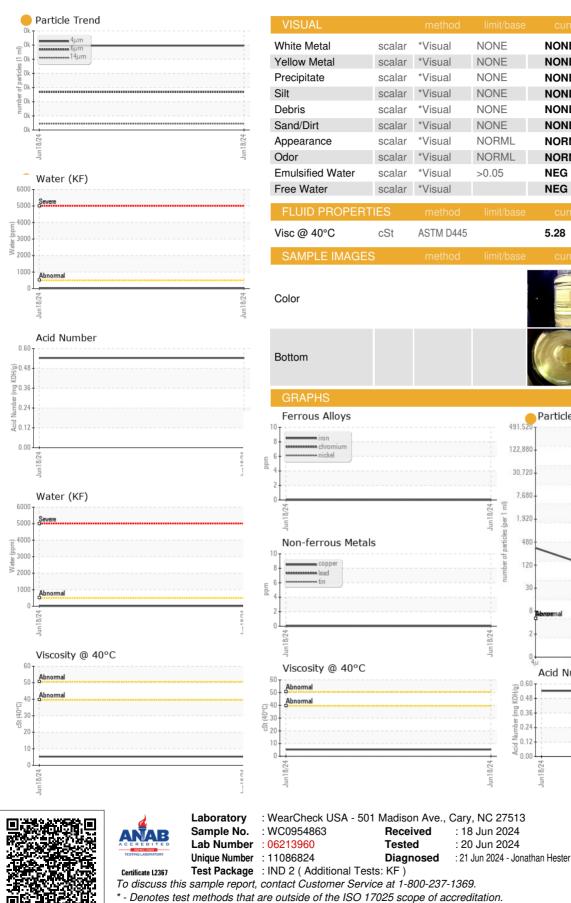

6707 WHITESTONE RD BALTIMORE, MD US 21207 Contact: MIKE STEVENSON mike@tagengineering.com T: (410)265-8686 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (410)265-8690

TAG ENGINEERING INC

21µ

Report Id: TAGBAL [WUSCAR] 06213960 (Generated: 06/23/2024 04:29:23) Rev: 1

Contact/Location: MIKE STEVENSON - TAGBAL