

OIL ANALYSIS REPORT

Area EL SAUZ [200007686] M04WEA90360 (S/N W-123194)

Wind Turbine Gearbox

Fluic FUCHS RENOLIN UNISYN CLP 320 (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | | /2023 | Nov2023 May20 | | |
|------------------|----------|--------------|------------|---------------|--------------------|-------------|
| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | NX014624 | NX014659 | NX014584 |
| Sample Date | | Client Info | | 15 May 2024 | 07 Nov 2023 | 02 Nov 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | >40 | 18 | 9 | 25 |
| Iron | ppm | ASTM D5185m | >55 | 28 | 25 | 36 |
| Chromium | ppm | ASTM D5185m | >2 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | <1 | 1 | 0 |
| Lead | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >7 | <1 | 0 | <1 |
| Tin | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | 20 | 0 | 0 | 0 |
| Cadmium | | | | 0 | 0 | 0 |
| | ppm | ASTM D5185m | | - | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 3 | 2 | 3 |
| Barium | ppm | ASTM D5185m | | 0 | 3 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 17 | 20 | 17 |
| Phosphorus | ppm | ASTM D5185m | | 248 | 226 | 205 |
| Zinc | ppm | ASTM D5185m | | 4 | <1 | 0 |
| Sulfur | ppm | ASTM D5185m | | 6226 | 5285 | 4841 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >35 | 7 | 6 | 6 |
| Sodium | ppm | ASTM D5185m | | 3 | 1 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 1 | 0 |
| Water | % | ASTM D6304 | | 0.005 | 0.006 | 0.008 |
| ppm Water | ppm | ASTM D6304 | >200 | 58 | 66 | 88 |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 12053 | 127492 | 81278 |
| Particles >6µm | | ASTM D7647 | >320 | <u> </u> | ▲ 10954 | <u> </u> |
| Particles >14μm | | ASTM D7647 | >40 | 11 | 28 | A 71 |
| Particles >21μm | | ASTM D7647 | >10 | 2 | 2 | A 23 |
| Particles >38μm | | ASTM D7647 | >3 | 0 | 1 | A 3 |
| Particles >71µm | | ASTM D7647 | | 0 | 0 | 1 |
| Oil Cleanliness | | ISO 4406 (c) | >/15/12 | <u> </u> | ▲ 24/21/12 | ▲ 24/19/13 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.6 | 0.39 | 0.34 DEVIN LINE | 0.34 |

Report Id: NORDEX [WUSCAR] 06214007 (Generated: 06/21/2024 18:50:31) Rev: 1


0.39 0.34 0.34 Contact/Location: DEVIN LINEHAN - NORDEX



OIL ANALYSIS REPORT

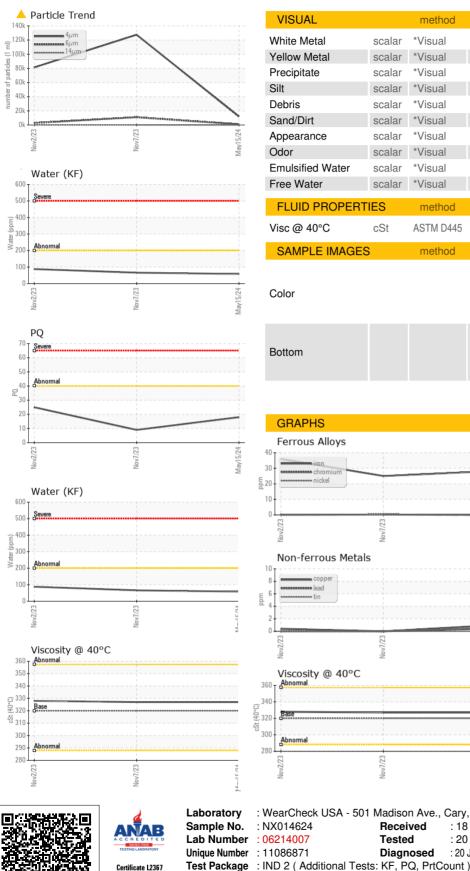

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------------------|--------|---------------------|-------------------|----------------|-----------------|-----------------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.02 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| | | | | | | |
| Visc @ 40°C | cSt | ASTM D445 | 320 | 327 | 327 | 328 |
| Visc @ 40°C SAMPLE IMAGES | | ASTM D445 method | 320 limit/base | 327 current | 327 history1 | 328 history2 |
| - | | | | - | - | |

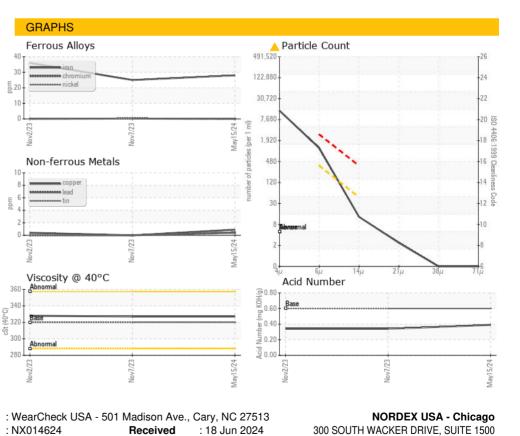

: 20 Jun 2024

: 20 Jun 2024 - Don Baldridge

Tested

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Diagnosed

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: NORDEX [WUSCAR] 06214007 (Generated: 06/21/2024 18:50:31) Rev: 1

Certificate 12367

Contact/Location: DEVIN LINEHAN - NORDEX

Page 2 of 2

CHICAGO, IL

T: (312)386-4124

F: (312)386-7102

Contact: DEVIN LINEHAN

DLinehan@nordex-online.com

US 60606