




OIL ANALYSIS REPORT

Sample Rating Trend

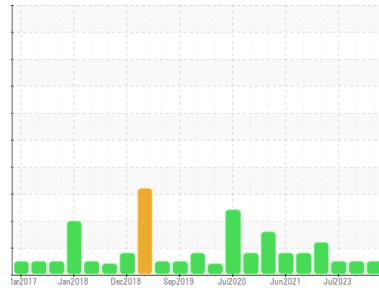

NORMAL



Machine Id
BUSCH PR5-503 S3 (S/N U053804561)
 Component
Pump
 Fluid
USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a trace of moisture present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | USPM37803 | USPM30867 | USPM27898 |
| Sample Date | Client Info | 01 Jun 2024 | 29 Jan 2024 | 18 Jul 2023 |
| Machine Age | hrs | Client Info | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|------------|-----------------|--------------|----------|
| Iron | ppm | ASTM D5185m >90 | 0 | 0 |
| Chromium | ppm | ASTM D5185m >5 | 0 | <1 |
| Nickel | ppm | ASTM D5185m >5 | <1 | 0 |
| Titanium | ppm | ASTM D5185m >3 | 0 | <1 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >7 | <1 | 0 |
| Lead | ppm | ASTM D5185m >12 | 0 | <1 |
| Copper | ppm | ASTM D5185m >30 | <1 | <1 |
| Tin | ppm | ASTM D5185m >9 | 1 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|------------|------------------|--------------|----------|
| Boron | ppm | ASTM D5185m 0 | <1 | 0 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | <1 | 0 |
| Magnesium | ppm | ASTM D5185m 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m 1800 | 1045 | 862 |
| Zinc | ppm | ASTM D5185m 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m 0 | 20 | 0 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|------------|------------------|--------------|----------|
| Silicon | ppm | ASTM D5185m >60 | 4 | 2 |
| Sodium | ppm | ASTM D5185m | 1 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 3 | 2 |
| Water | % | ASTM D6304 >.1 | 0.106 | 0.050 |
| ppm Water | ppm | ASTM D6304 >1000 | 1069 | 504 |

FLUID CLEANLINESS






| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 >5000 | 1427 | 389 | 379 |
| Particles >6µm | ASTM D7647 >1300 | 580 | 75 | 104 |
| Particles >14µm | ASTM D7647 >160 | 41 | 8 | 12 |
| Particles >21µm | ASTM D7647 >40 | 7 | 2 | 2 |
| Particles >38µm | ASTM D7647 >10 | 0 | 0 | 0 |
| Particles >71µm | ASTM D7647 >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | 18/16/13 | 16/13/10 | 16/14/11 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|------------|-----------------|--------------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.05 | 0.084 | 0.045 |



OIL ANALYSIS REPORT

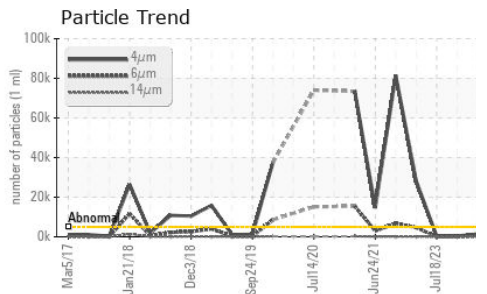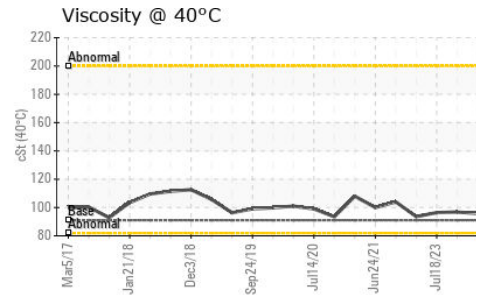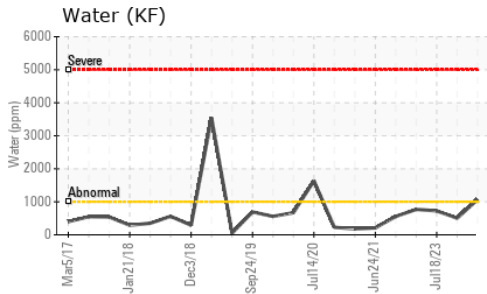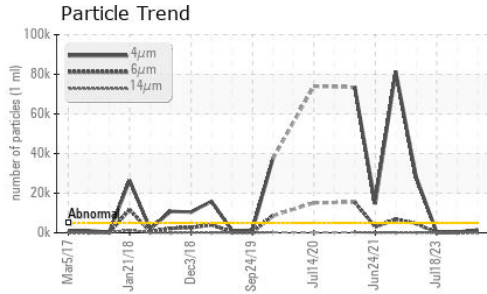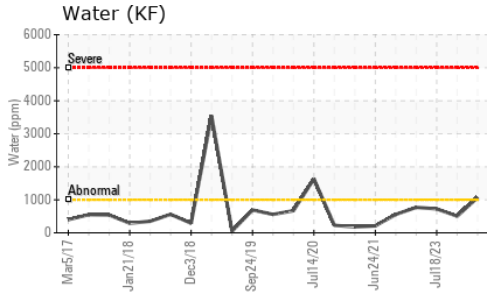


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 91 | 95.8 | 96.8 | 96.4 |






| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

Color

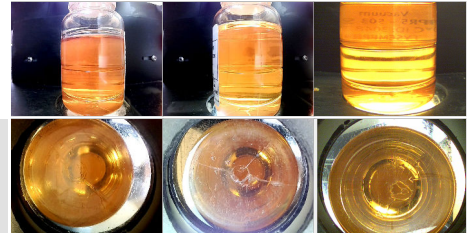

Bottom

GRAPHS

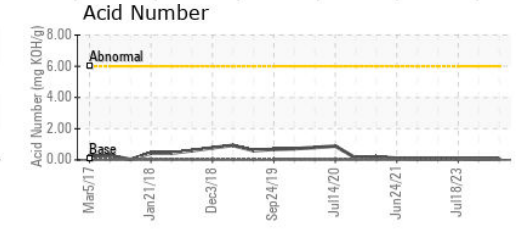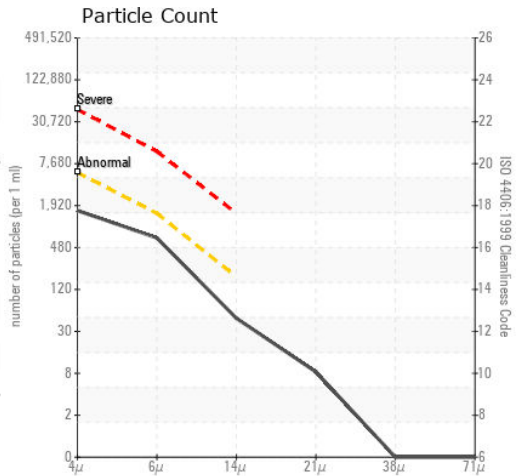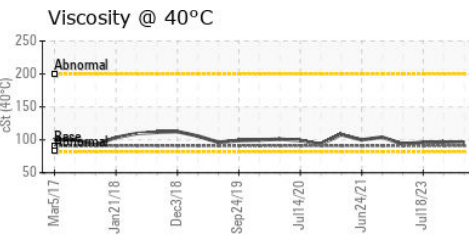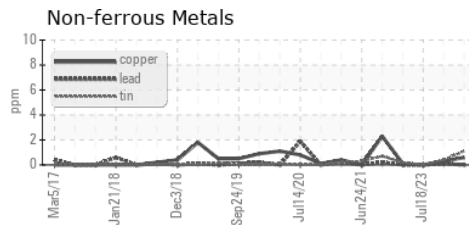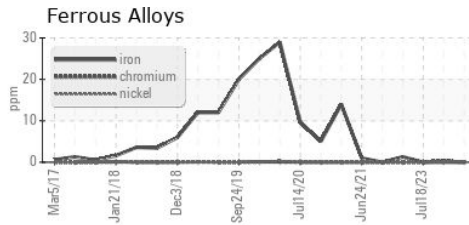

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : USPM37803

Lab Number : 06214031

Unique Number : 11086895

Test Package : IND 2

Received : 18 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 21 Jun 2024 - Doug Bogart

TYSON-Emporia-USP

2101 West Sixth

Emporia, KS

US 66801

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (620)343-3640

F: (620)340-1253