


OIL ANALYSIS REPORT

SAMPLE INFORMATION method

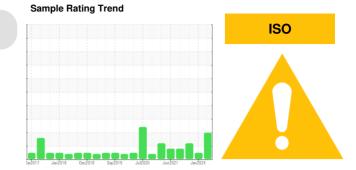

current

history1

history2

Machine Id

BUSCH 8600 VA P1 (S/N 705)

Component Pump Fluid

USPI VAC 100 (--- GAL)

DIAGNOSIS

A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	VIATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM37790	USPM30865	USPR00071
Sample Date		Client Info		01 Jun 2024	29 Jan 2024	06 Sep 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	0	0	<1
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>7	<1	1	1
Lead	ppm	ASTM D5185m	>12	0	0	0
Copper	ppm	ASTM D5185m	>30	<1	<1	0
Tin	ppm	ASTM D5185m	>9	<1	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	<1	0	<1
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	1800	1526	1248	1340
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	39	0	33
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	4	3	3
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	3	2	1
Water	%	ASTM D6304	>.1	0.075	0.052	0.058
ppm Water	ppm	ASTM D6304	>1000	755	526	587.1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 7468	3879	8407
Particles >6µm		ASTM D7647	>1300	<u> </u>	787	1790
Particles >14µm		ASTM D7647	>160	<u> </u>	47	58
Particles >21µm		ASTM D7647	>40	<mark>/</mark> 39	11	9
Particles >38µm		ASTM D7647	>10	4	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 20/19/15	19/17/13	0/18/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN) :15:27) Bey: 1	mg KOH/g	ASTM D8045		0.081	0.054 BVICE MANAG	0.076 EB - IBPEMP


limit/base


Report Id: IBPEMP01 [WUSCAR] 06214044 (Generated: 06/23/2024 05:15:27) Rev: 1


Contact/Location: SERVICE MANAGER - IBPEMP01



OIL ANALYSIS REPORT

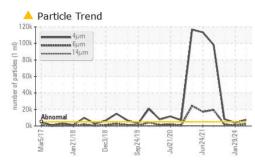



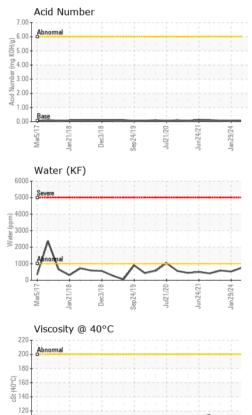


100

8

Abnorma

Aar5/1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	91	89.6	89.0	89.0
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					•	Vizuum WO VA - P1 (V. 3048217 TSEMPPRO
Bottom						

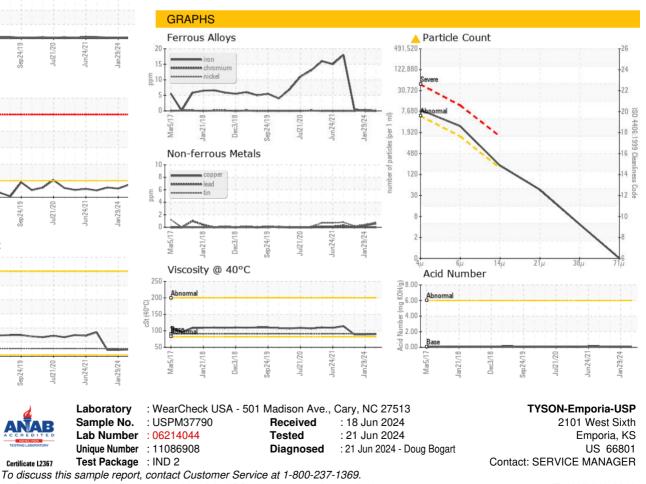

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (620)343-3640 F: (620)340-1253

Report Id: IBPEMP01 [WUSCAR] 06214044 (Generated: 06/23/2024 05:15:27) Rev: 1

Contact/Location: SERVICE MANAGER - IBPEMP01

Page 2 of 2