




# OIL ANALYSIS REPORT

## Sample Rating Trend

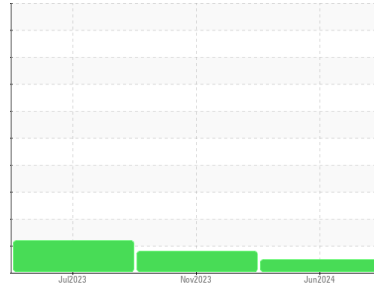

**NORMAL**



Machine Id  
**BUSCH VAR-M900**  
 Component  
**Pump**  
 Fluid  
**USPI VAC 100 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>USPM37785</b>	USPM30849	USPM27914
Sample Date	Client Info			<b>01 Jun 2024</b>	18 Nov 2023	18 Jul 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>3</b>	2	<1
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>7	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m	>12	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>9	<b>2</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>1</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	3
Calcium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	1800	<b>1672</b>	1369	1536
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	3
Sulfur	ppm	ASTM D5185m	0	<b>93</b>	60	163






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	<b>18</b>	18	16
Sodium	ppm	ASTM D5185m		<b>2</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	1	2
Water	%	ASTM D6304	>.1	<b>0.082</b>	0.037	0.074
ppm Water	ppm	ASTM D6304	>1000	<b>822</b>	375	742.8

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>3796</b>	● 5982	● 6752
Particles >6µm		ASTM D7647	>1300	<b>1233</b>	1097	● 1734
Particles >14µm		ASTM D7647	>160	<b>79</b>	33	138
Particles >21µm		ASTM D7647	>40	<b>14</b>	6	40
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	8
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	2
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/17/13</b>	● 20/17/12	● 20/18/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	<b>0.09</b>	0.067	0.06



# OIL ANALYSIS REPORT

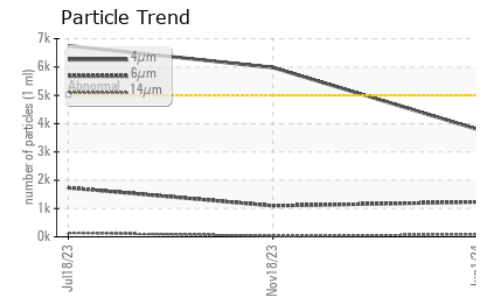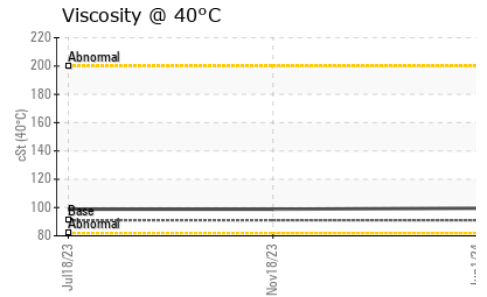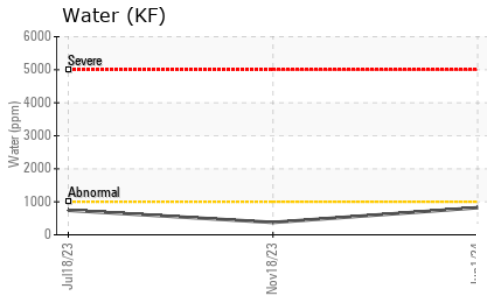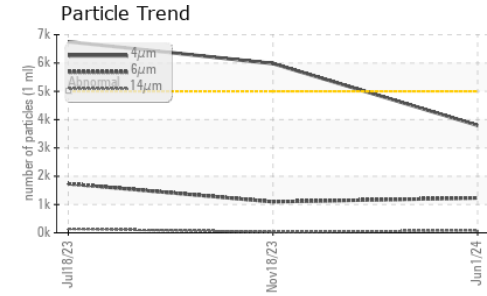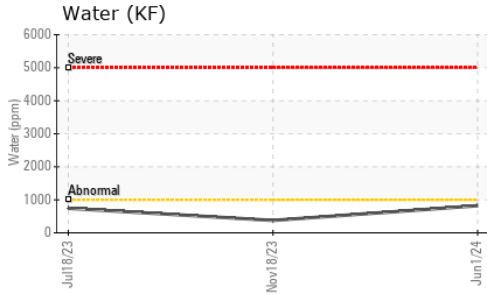


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	99.5	98.8	98.8






SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color

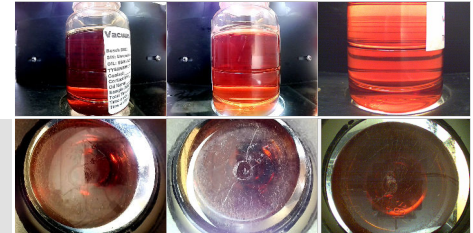

Bottom

## GRAPHS

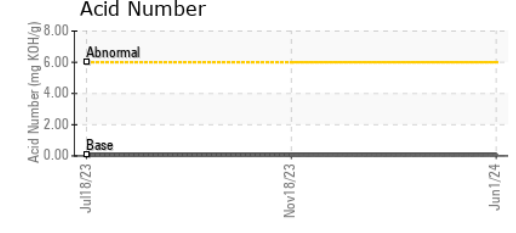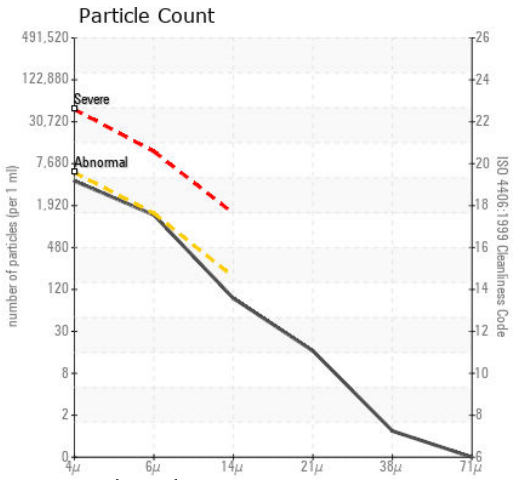

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : USPM37785

Lab Number : 06214049

Unique Number : 11086913

Test Package : IND 2

Received : 18 Jun 2024

Tested : 21 Jun 2024

Diagnosed : 21 Jun 2024 - Doug Bogart

TYSON-Emporia-USP

2101 West Sixth

Emporia, KS

US 66801

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (620)343-3640

F: (620)340-1253