




# OIL ANALYSIS REPORT

Sample Rating Trend

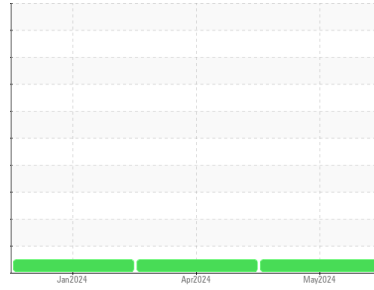

**NORMAL**



Machine Id  
**OSHKOSH 4373**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0917064</b>	WC0917288	WC0878826
Sample Date	Client Info		<b>10 May 2024</b>	02 Apr 2024	04 Jan 2024
Machine Age	mls	Client Info	<b>68017</b>	66317	6800
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>3</b>	6	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m >330	<b>0</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>7</b>	2	9
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	57	53
Manganese	ppm	ASTM D5185m	<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m 450	<b>868</b>	866	900
Calcium	ppm	ASTM D5185m 3000	<b>1047</b>	982	1073
Phosphorus	ppm	ASTM D5185m 1150	<b>1025</b>	939	961
Zinc	ppm	ASTM D5185m 1350	<b>1172</b>	1123	1126
Sulfur	ppm	ASTM D5185m 4250	<b>2849</b>	3125	2879

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	4	3
Sodium	ppm	ASTM D5185m >158	<b>&lt;1</b>	1	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	<1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	6.6	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	18.4	19.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.5</b>	14.2	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.1</b>	8.5	8.6











# OIL ANALYSIS REPORT

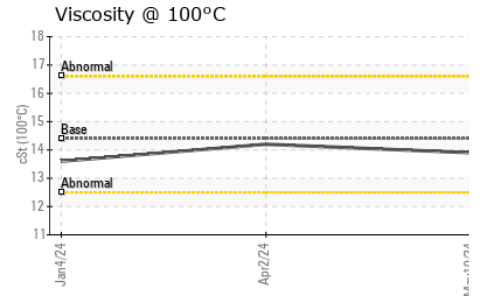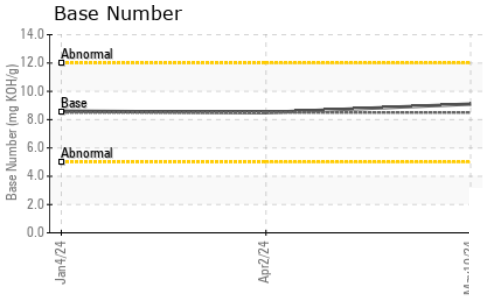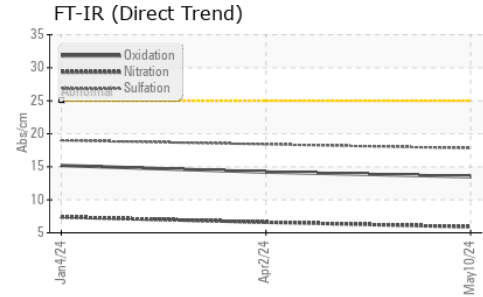

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	14.2

### GRAPHS

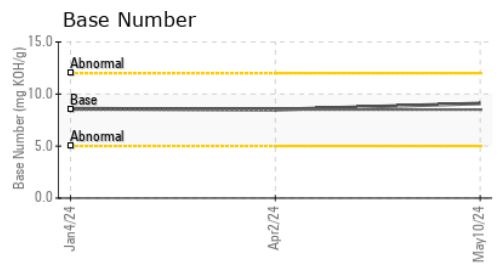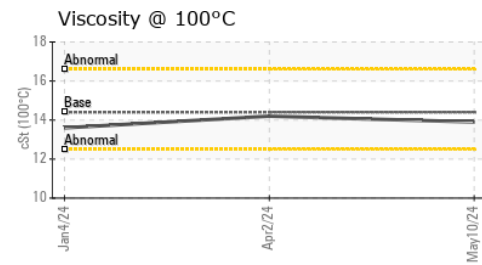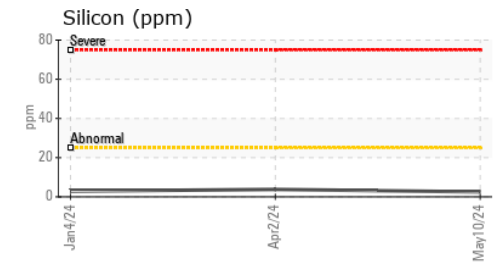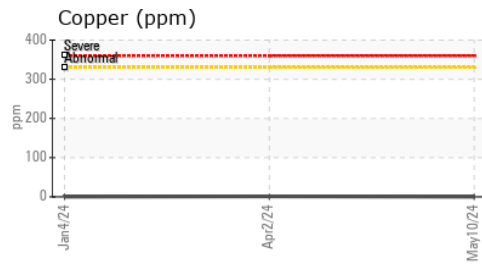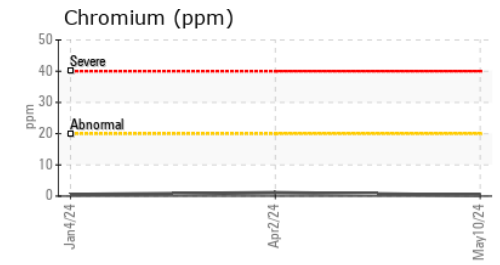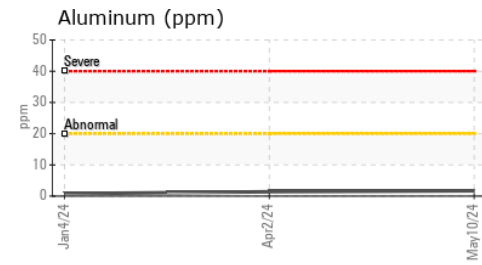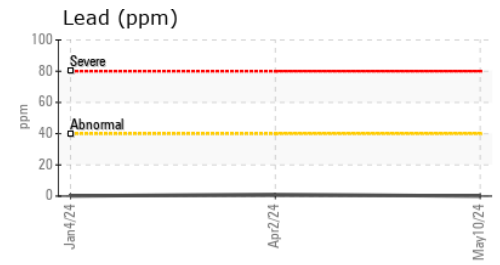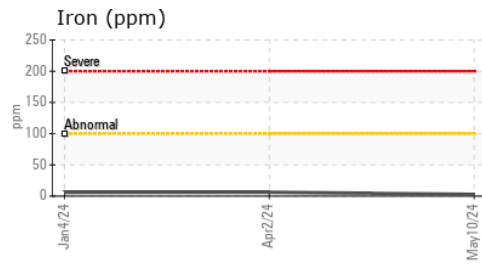

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0917064      **Received** : 19 Jun 2024  
**Lab Number** : 06214244      **Tested** : 20 Jun 2024  
**Unique Number** : 11087108      **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**CONCRETE SERVICE CO - FAY BLOCK**  
 161 BUILDERS BLVD  
 FAYETTEVILLE, NC  
 US 28301  
 Contact: BRYAN VANNIMAN  
 bryanvanniman@fayblock.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)