




# OIL ANALYSIS REPORT

## Sample Rating Trend

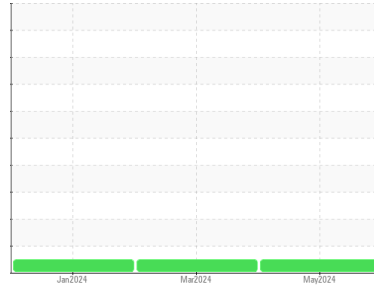

**NORMAL**



Machine Id  
**FREIGHTLINER 2133**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0917054</b>	WC0917320	WC0893870
Sample Date	Client Info			<b>20 May 2024</b>	20 Mar 2024	25 Jan 2024
Machine Age	mls	Client Info		<b>145115</b>	136029	126329
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>7</b>	10	8
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	4	4
Lead	ppm	ASTM D5185m	>30	<b>0</b>	1	0
Copper	ppm	ASTM D5185m	>150	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>4</b>	0	2
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>60</b>	57	59
Manganese	ppm	ASTM D5185m		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>905</b>	911	949
Calcium	ppm	ASTM D5185m	3000	<b>1065</b>	1056	1031
Phosphorus	ppm	ASTM D5185m	1150	<b>1042</b>	963	1066
Zinc	ppm	ASTM D5185m	1350	<b>1214</b>	1200	1241
Sulfur	ppm	ASTM D5185m	4250	<b>2826</b>	3280	2992

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	4	2
Sodium	ppm	ASTM D5185m	>158	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	8	6


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	6.9	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.8</b>	19.1	18.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	14.3	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.0</b>	8.8	8.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

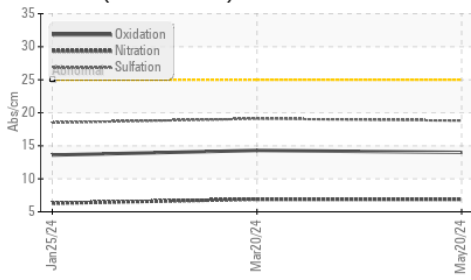

Base Number

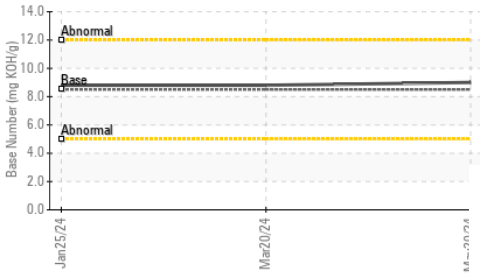









Viscosity @ 100°C

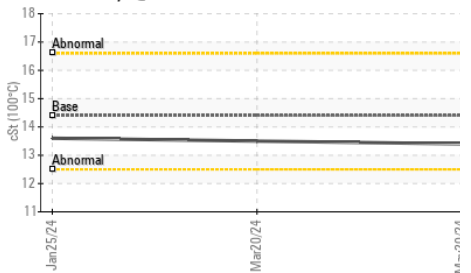

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.5

## GRAPHS

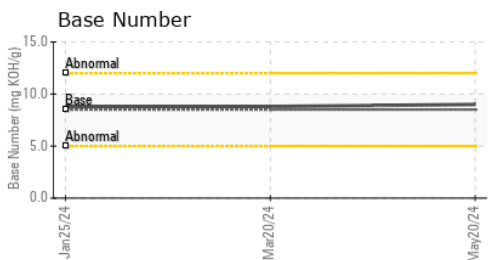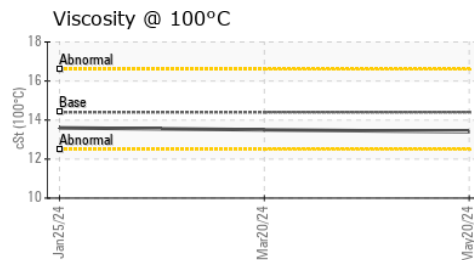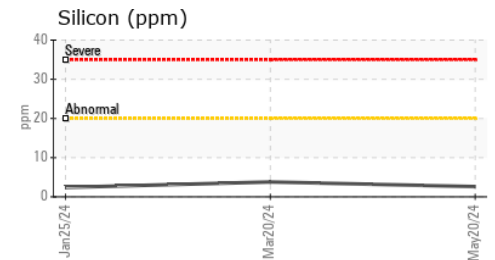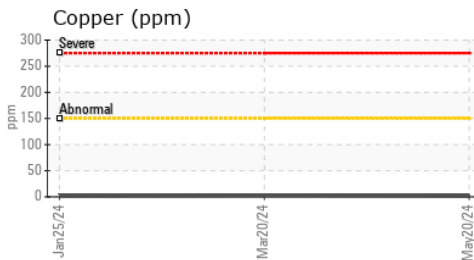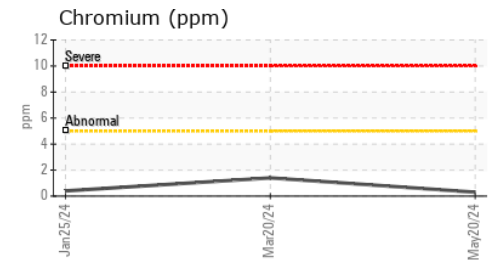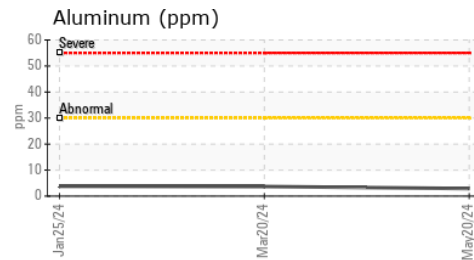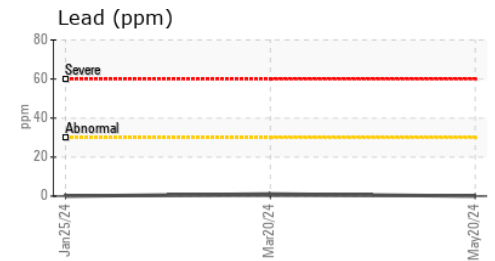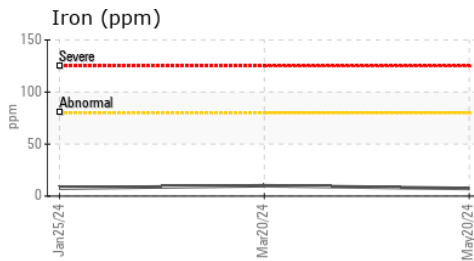

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0917054  
**Lab Number** : 06214250  
**Unique Number** : 11087114  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**CONCRETE SERVICE CO - FAY BLOCK**  
 161 BUILDERS BLVD  
 FAYETTEVILLE, NC  
 US 28301

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: BRYAN VANNIMAN  
 bryanvanniman@fayblock.com  
 T: (800)326-9198