



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Area

[WO36040]

Machine Id

FREIGHTLINER TRK 2013

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: FIRST OIL CHANGE)

Wear

Metal levels are typical for a components first oil change.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0903648	---	---
Sample Date	Client Info		30 May 2024	---	---
Machine Age	mls	Client Info	32140	---	---
Oil Age	mls	Client Info	32140	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	55	---
Chromium	ppm	ASTM D5185m	>5	5	---
Nickel	ppm	ASTM D5185m	>2	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>30	152	---
Lead	ppm	ASTM D5185m	>30	<1	---
Copper	ppm	ASTM D5185m	>150	174	---
Tin	ppm	ASTM D5185m	>5	2	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	24	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	60	37	---
Manganese	ppm	ASTM D5185m	0	7	---
Magnesium	ppm	ASTM D5185m	1010	475	---
Calcium	ppm	ASTM D5185m	1070	1710	---
Phosphorus	ppm	ASTM D5185m	1150	682	---
Zinc	ppm	ASTM D5185m	1270	822	---
Sulfur	ppm	ASTM D5185m	2060	2103	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8	---
Sodium	ppm	ASTM D5185m		6	---
Potassium	ppm	ASTM D5185m	>20	352	---
Fuel	%	ASTM D3524	>5	0.0	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.4	---











OIL ANALYSIS REPORT

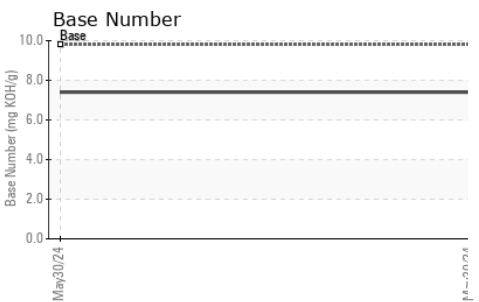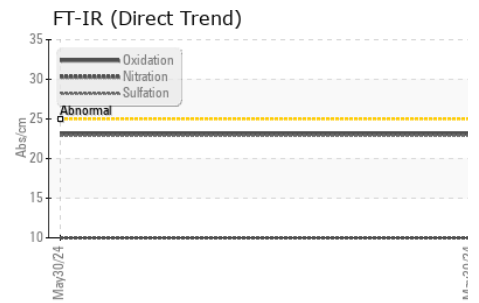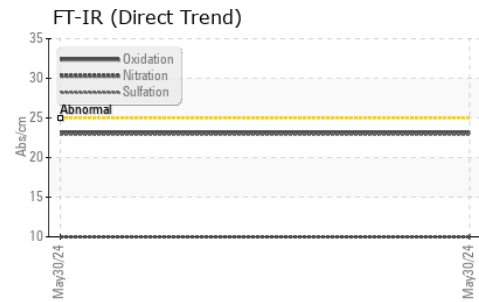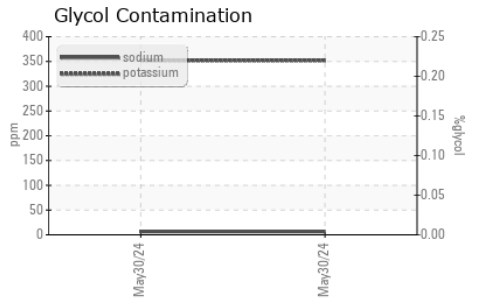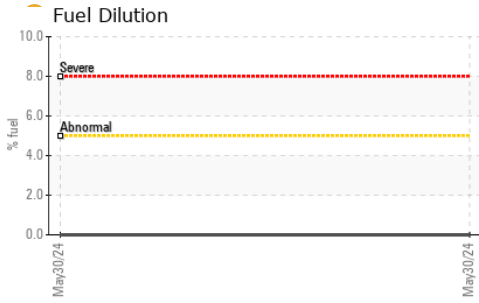

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	10.0	---

GRAPHS

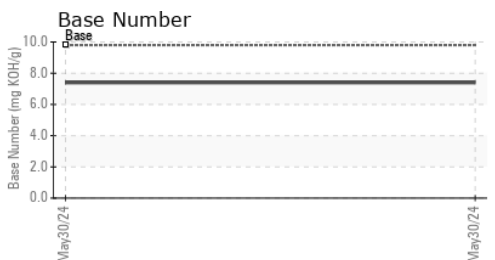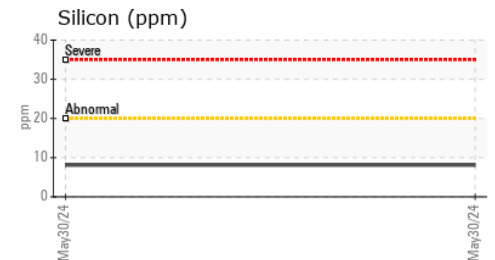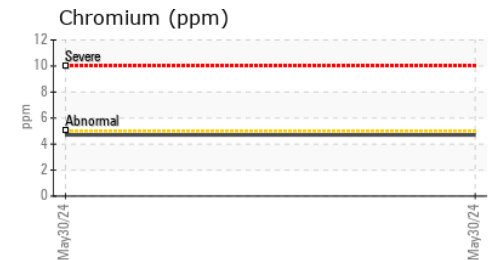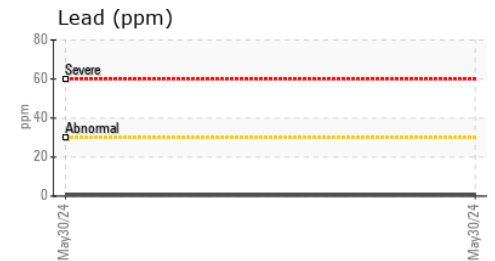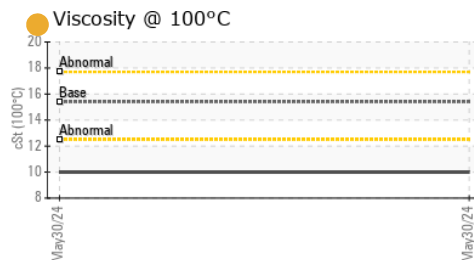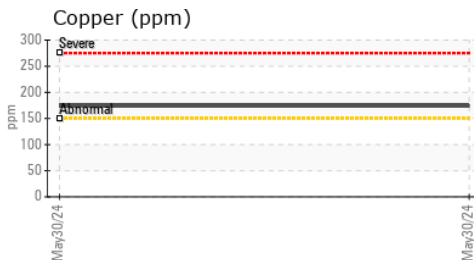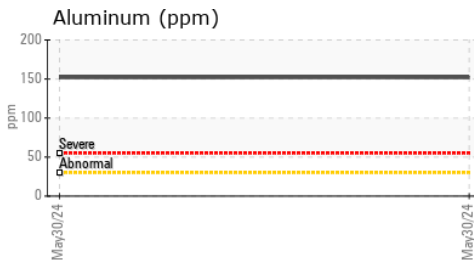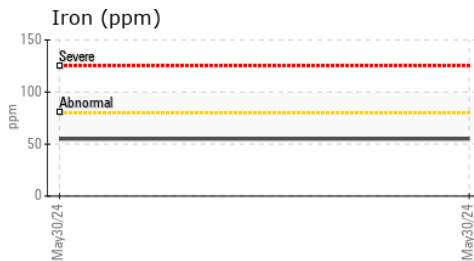

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0903648 **Received** : 19 Jun 2024
Lab Number : 06214288 **Tested** : 21 Jun 2024
Unique Number : 11087152 **Diagnosed** : 21 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAMPBELL OIL COMPANY
 PO BOX 637, 418 PEANUT ROAD
 ELIZABETHTOWN, NC
 US 28337
 Contact: Cassie Priest
 cassiep@campbelloilcompany.com

T: (910)862-4344