




OIL ANALYSIS REPORT



Area
KANSAS/44/HY - SKID STEER
 Machine Id
53.157L [KANSAS^44^HY - SKID STEER]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (9)

Sample Rating Trend

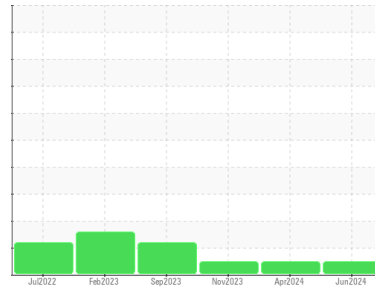

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0918269	WC0918159	WC0833777
Sample Date	Client Info	11 Jun 2024	08 Apr 2024	16 Nov 2023
Machine Age	hrs	1937	1836	1513
Oil Age	hrs	0	323	1513
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	8	6	10
Chromium	ppm ASTM D5185m >10	<1	0	0
Nickel	ppm ASTM D5185m >10	0	0	<1
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >10	2	<1	1
Lead	ppm ASTM D5185m >10	<1	<1	3
Copper	ppm ASTM D5185m >75	3	2	3
Tin	ppm ASTM D5185m >10	0	0	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	27	20	4
Barium	ppm ASTM D5185m	2	<1	0
Molybdenum	ppm ASTM D5185m	<1	<1	0
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m	15	12	5
Calcium	ppm ASTM D5185m	1918	1799	564
Phosphorus	ppm ASTM D5185m	845	779	738
Zinc	ppm ASTM D5185m	1064	893	923
Sulfur	ppm ASTM D5185m	3308	3447	2122

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	3	2
Sodium	ppm ASTM D5185m	0	3	2
Potassium	ppm ASTM D5185m >20	2	7	2

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	11019	5287	1277
Particles >6µm	ASTM D7647 >2500	1467	434	146
Particles >14µm	ASTM D7647 >640	57	23	10
Particles >21µm	ASTM D7647 >160	12	5	3
Particles >38µm	ASTM D7647 >40	0	1	0
Particles >71µm	ASTM D7647 >10	0	1	0
Oil Cleanliness	ISO 4406 (c) >--/18/16	21/18/13	20/16/12	17/14/10

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	1.08	1.16	0.626



OIL ANALYSIS REPORT

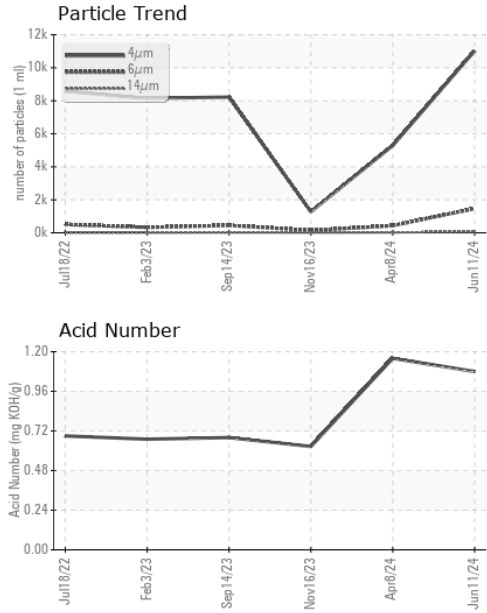


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


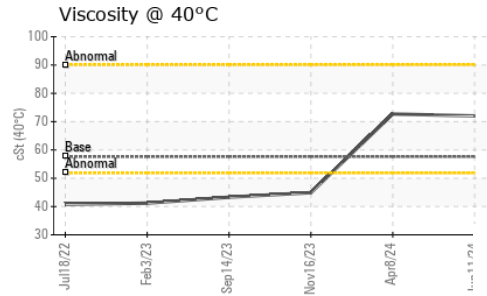


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.6	72.0	72.7	44.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

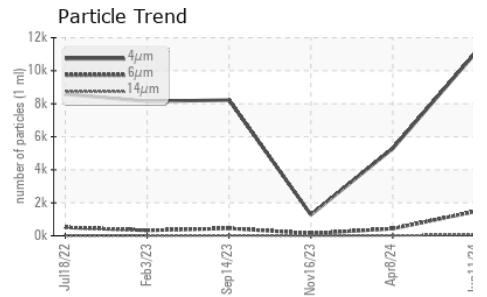

GRAPHS

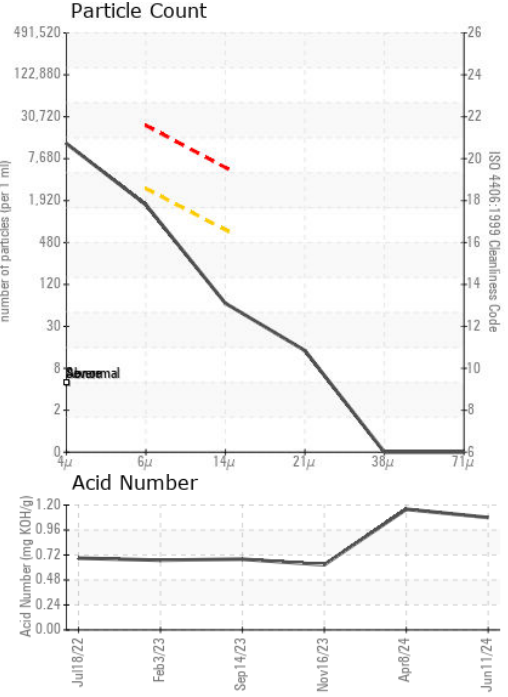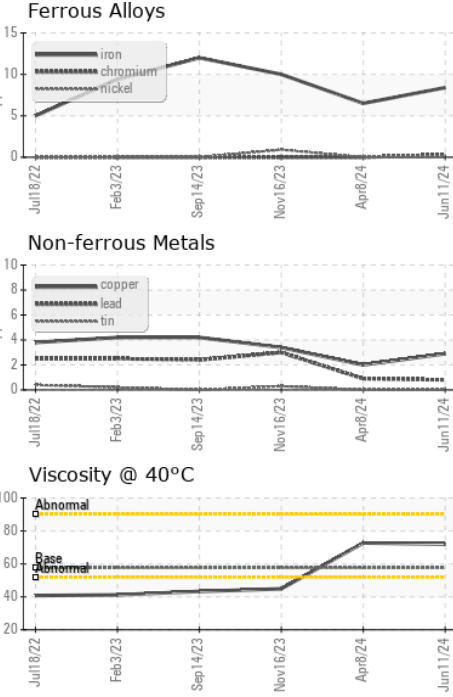

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918269 **Received** : 19 Jun 2024
Lab Number : 06214615 **Tested** : 20 Jun 2024
Unique Number : 11087479 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)