OIL ANALYSIS REPORT

Sample Rating Trend

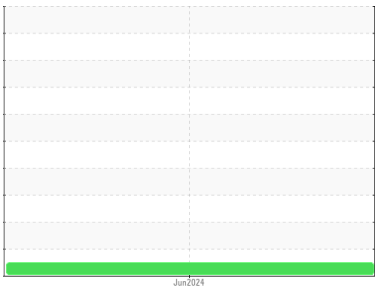

NORMAL

Machine Id
STRETCHER UNIT (S/N M1155)
Component
Hydraulic System
Fluid
LUBE PLUS AW 46 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Particle Filter (Magn: 200 x)

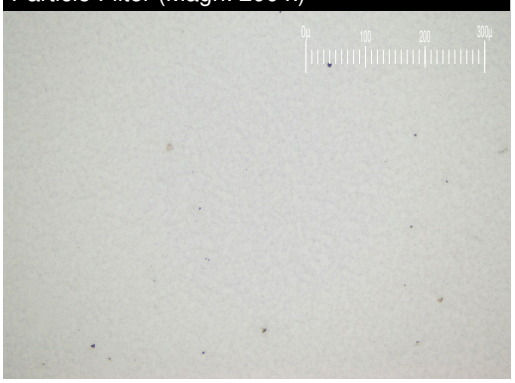

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PH0003783**	---	---
Sample Date		Client Info		**10 Jun 2024**	---	---
Machine Age	hrs	Client Info		**3279**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**NORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**5**	---	---
Chromium	ppm	ASTM D5185m	>20	**<1**	---	---
Nickel	ppm	ASTM D5185m	>20	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m	>20	**2**	---	---
Lead	ppm	ASTM D5185m	>20	**0**	---	---
Copper	ppm	ASTM D5185m	>20	**<1**	---	---
Tin	ppm	ASTM D5185m	>20	**0**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**1**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**<1**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**2**	---	---
Calcium	ppm	ASTM D5185m		**0**	---	---
Phosphorus	ppm	ASTM D5185m		**185**	---	---
Zinc	ppm	ASTM D5185m		**253**	---	---
Sulfur	ppm	ASTM D5185m		**520**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**13**	---	---
Sodium	ppm	ASTM D5185m		**0**	---	---
Potassium	ppm	ASTM D5185m	>20	**1**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	**1254**	---	---
Particles >6µm		ASTM D7647	>2500	**532**	---	---
Particles >14µm		ASTM D7647	>320	**96**	---	---
Particles >21µm		ASTM D7647	>80	**14**	---	---
Particles >38µm		ASTM D7647	>20	**0**	---	---
Particles >71µm		ASTM D7647	>4	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	**17/16/14**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.29**	---	---

OIL ANALYSIS REPORT

Particle Count

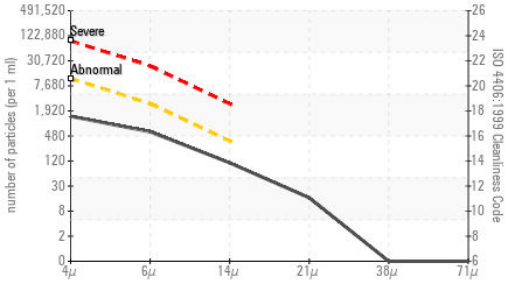

Particle Trend

Viscosity @ 40°C

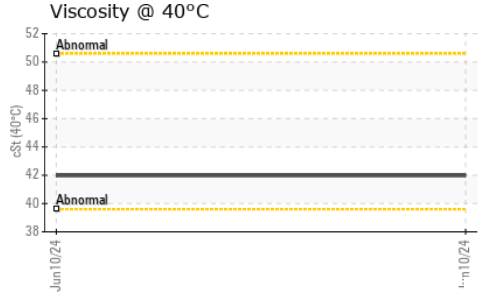

Particle Trend

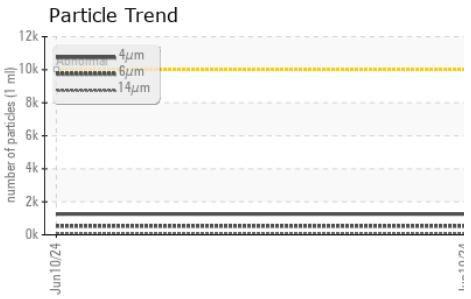

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.05	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**41.97**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*
PrtFilter				*no image*	*no image*

GRAPHS

Ferrous Alloys

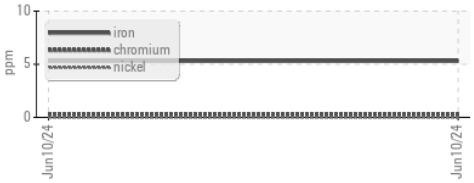

Non-ferrous Metals

Viscosity @ 40°C

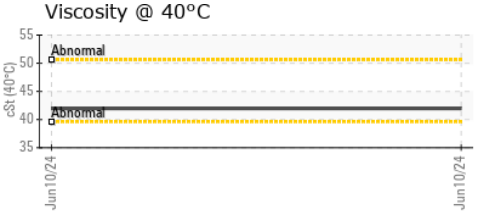

Particle Filter (Magn: 200 x)

Acid Number

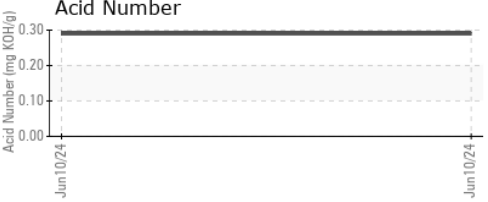

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0003783
Lab Number : 06214656
Unique Number : 11087520
Test Package : PLANT (Additional Tests: PrtFilter)

Received : 19 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Jonathan Hester

WILLBANKS METALS
1155 NE 28TH ST
FORT WORTH, TX
US 76106
Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: